



**FATIGUE TECHNOLOGY**

A PCC Company



# Tooling Catalog

*Revision 7*

Seattle, Washington  
U.S.A.

# Revision 7.0

Released September 2014

## Sales & Technical Questions

[sales@fatiguetechnology.com](mailto:sales@fatiguetechnology.com)

(206) 246-2010

## Additional Contact Information Available Online

[www.fatiguetechnology.com/about-contact.asp](http://www.fatiguetechnology.com/about-contact.asp)



---

401 ANDOVER PARK EAST • SEATTLE, WA USA • 98188

---

This catalog includes the complete line of tooling for Fatigue Technology (FTI)'s Cold Expansion and Structural-Life Enhancement Systems. Included is information to assist you in the proper selection of tools and parts that meet your specific requirements, as well as instructions for placing an order.

As we develop new products and improve tooling and processes, this catalog will be updated. The most current version is available for download on our website at <http://www.fatiguetech.com/support-tooling-catalog-operation-manuals.asp>

If you have any questions or need information regarding our On-Site Training, Field-Team Services, Materials Test Lab, or if your application requires custom capital equipment and tooling, our Sales Staff is available at (206) 246-2010 from 8:00am to 5:00pm PST, Monday through Friday.

You can also find more information by visiting our website at [www.fatiguetech.com](http://www.fatiguetech.com).

*Split Sleeve Cold Expansion, SsCx, Cx, ForceLoc, Countersink Cold Expansion, CsCx, Cold Expansion to Size, Cx2s, FmCx, StopCrack, ScCx, BICx, FtCx, GrCx, TICx, Semi-Automatic Cold Expansion, and SaCx are trademarks of Fatigue Technology. ForceMate, ForceTec, BushLoc, GromEx, and TukLoc are registered trademarks of Fatigue Technology.*

Log #35835



*This page intentionally left blank  
for two-sided printing*

# INDEX OF SECTIONS

Section	Title	Page
1.0	General Information.....	1
2.0	Detailed Tooling.....	9
	• Capital Tooling	
	• Durable Tooling	
	• Expendable Tooling	
3.0	CB Tooling.....	121
	• Cold Expansion in Aluminium and Mild Steel	
4.0	CW Tooling .....	134
	• Low Interference Cold Expansion in Aluminium	
5.0	CA Tooling .....	143
	• Cold Expansion in Titanium and High Strength Steel	
6.0	CR Tooling.....	155
	• Rework Cold Expansion in Aluminium and Mild Steel	
7.0	Cx2s Tooling.....	161
	• Cold Expansion to Size in Aluminium	
8.0	CsCx Tooling.....	164
	• Countersink Cold Expansion in Aluminium	
9.0	ForceMate .....	174
	• High Interference Insert Installation	
10.0	ForceTec.....	179
	• Rivetless Nut Plate	
11.0	GromEx .....	182
	• Grommet Installation for Fastener Hole Reinforcement in Composites	
12.0	Tooling Kits.....	184
	• StopCrack Enhanced Stop-Drill Repair	
	• Cold Expansion Overhaul and Repair Kits (CxORK)	
	• Custom Design Rework Kits	
	• Tool Cases and Cabinets	
13.0	Accessories .....	194
A.0	Appendix A .....	206
	A.1 Glossary of Terms	
	A.2 Metric Conversion Tables	
	A.3 Subject Index	



*This page intentionally left blank  
for two-sided printing*

# INTRODUCTION

1.1	About Fatigue Technology .....	2
1.2	Using This Catalog.....	3
1.3	System of Tooling.....	4
1.4	Placing an Order .....	5
1.5	Cold Expansion System Capabilities .....	6
1.6	Materials Testing Facility .....	7

# 1.0 GENERAL INFORMATION



# 1.1 ABOUT *FATIGUE* *TECHNOLOGY*



Fatigue Technology (FTI) has been providing innovative solutions to aircraft manufacturers since 1969. FTI's complete systems of tooling are used worldwide to significantly reduce manufacturing and maintenance flow-time and costs in both military and commercial aircraft programs.

FTI's professional staff provides a full range of support services which include:

- *Special project application engineering*
- *Detailed project planning, implementation, and management*
- *On-site assistance which includes training, tool room setup, rental equipment, and a full-service field team*
- *Materials testing of metallic and composite materials*

Our Sales Department is available to assist with your special fatigue life enhancement requirements and tooling selection. We would welcome an opportunity to assist you if you have any questions regarding any of our products or services.

Many of FTI's Cold Expansion Systems, processes, and products are protected by U.S. and foreign patents, and by pending patent applications. These systems and processes are dependent on specific tooling and must be performed in accordance with FTI's specifications or controlling documents. To ensure proper results, it is essential that FTI's complete integrated system of tooling be purchased and utilized. The use of tooling procured from other than a licensed supplier could jeopardize fatigue life enhancement and may not be licensed under FTI's patents and applications.

For additional details concerning legal matters, please contact FTI Headquarters.

---

## Using This Catalog

This catalog is organized into separate tabbed sections for each of FTI's Cold Expansion Tooling Systems. As a general rule, determine the correct tools for each application by following these steps:

**Step 1.** Determine the material to be cold expanded.

**Step 2.** Choose the applicable process and turn to that section in this catalog:

- CB Tooling: Split Sleeve Cold Expansion™ in Aluminum and Mild Steel
- CW Tooling: Low Interference Cold Expansion in Aluminum
- CA Tooling: Split Sleeve Cold Expansion™ in Titanium and High Strength Steel
- CR Tooling: Rework Split Sleeve Cold Expansion in Aluminum and Mild Steel
- KB2 Tooling: Split Sleeve Cold Expansion to Size™ in Aluminum
- CB/KB Tooling: Countersink Cold Expansion™ in Aluminum
- FmCx™ Tooling: ForceMate® Bushing Installation
- FtCx™ Tooling: ForceTec® Rivetless Nut Plate
- GrCx™ Tooling: GromEx® Composite Hole Reinforcement
- ScCx™ Tooling: StopCrack™ Enhanced Stop Drill Repair Method

**Step 3.** Select the Standard Tool Diameter Number (STDN), where applicable.

**Step 4.** Use the STDN (where applicable) to select the system of Standard Tools and their model numbers.

**Step 5.** For additional information and complete description of each tool, please refer to the Detailed Tooling Section.

**Step 6.** For further assistance, please contact your FTI Representative. A complete listing of FTI Representatives can be found on at [www.fatiguetechnology.com](http://www.fatiguetechnology.com)

# 1.3 SYSTEM OF TOOLING

## System of Tooling

To ensure maximum fatigue life enhancement of a cold expanded hole, it is critical that FTI's integrated system of tooling be utilized. FTI's fatigue life enhancement processes incorporate a *system* of technology and tooling designed to provide optimum performance. If you are unable to find your special tooling needs using this catalog, please contact FTI's Sales Staff or Engineering Staff for assistance in meeting your unique tooling requirements.



*A typical FTI system of tooling consists of everything required to properly cold expand a hole. This often includes (but is not limited to) cutting tools, powerpak, puller unit, mandrel, check fixtures, and split sleeves.*

---

## Placing an Order

To place an order, email or fax your request directly to our Customer Service Team. Please visit [www.fatiguetechnology.com](http://www.fatiguetechnology.com) for our current contact information. Your order will be acknowledged in accordance with FTI's Standard Purchase Order Terms and Conditions. (<http://www.fatiguetechnology.com/support-terms-and-conditions.asp>)

Tooling from this catalog may be ordered individually or as a kit. Our kits are comprised of a complete system of tooling containing everything necessary for a particular hole size. Capital tooling, such as a powerpak and puller unit, may be purchased or rented. Rentals are subject to availability.

FTI provides a rush delivery service for AOG situations. Please note that rush orders are subject to availability and an expedite fee. For complete details please contact our Customer Service Team.

### **When you place an order, please be ready to provide the following information:**

1. **Model or Part Number(s)** Needed.
2. **Quantity** Required.
3. **Aircraft Platform** or Industry.
4. **Acceptable Alternative** – if any (please provide us the application details: material, stackup, thickness, etc.)
5. Required **Shipping Date**.  
*If less than standard lead time, an expedite fee may be charged.*
6. Whether **Partial Shipments** will be accepted.
7. Preferred **Carrier and Shipping Method**.
8. **Shipping Address**.
9. **Billing Address**.
10. Your **Purchase Order Number**.
11. Your **Contact Information** (name, email address, and telephone number).

# 1.5 COLD EXPANSION SYSTEM CAPABILITIES

## Cold Expansion Systems

*Split Sleeve Cold Expansion* is performed by inserting a mandrel, pre-fitted with a disposable solid-film lubricated sleeve, into a hole and then pulling the mandrel back through the sleeve. The internally lubricated split sleeve protects the hole from damage and makes the system a one-sided process. The action of drawing the mandrel through the pre-lubricated split sleeve causes a radial plastic flow of the workpiece material. This produces an annular zone of residual compressive stresses that extends one radius to one diameter beyond the periphery of the hole. A zone of tension stress balances the zone of compressive stresses. The desired final hole diameter is obtained by reaming the cold expanded hole to the size required, or by using the Cold Expansion to Size process where no final ream is required.

*The ForceMate System* involves drawing an oversize mandrel through a pre-positioned clearance-fit bushing, that has been internally pre-lubricated by an FTI proprietary process. The tooling is sized so that a one-sided operation is standard. The resulting interference fit of the bushing, coupled with simultaneous cold working of the metal surrounding the hole, produces a 500 percent or better improvement in fatigue life. The bushing is then reamed to the required hole diameter.

*The ForceTec System* is a revolutionary rivetless nut plate system that uses split sleeve cold expansion. The rivetless nut plate installation consists of a retainer/cage assembly which is placed into a single hole from the back side. A mandrel, pre-fitted with a split sleeve, is inserted through the retainer from the front side. When the mandrel is drawn back through the sleeve, the retainer is expanded into the hole at an interference fit. The installed retainer holds a variety of standard floating locking nuts. This process results in increased fatigue life of the installation due to the high interference fit of the retainer, residual stresses imparted into the parent material by the cold expansion process, and elimination of fatigue prone satellite holes.

*The TukLoc System* combines cold expansion technology with the ease and versatility of blind nuts. FTI's state-of-the-art cold expansion process locks the nut in the aircraft structure providing resistance to fatigue cracking by combining an interference fit nut with an installation in a clean, round hole. In addition to the benefits of cold expansion, preparation of the starting holes for TukLoc is easy as there are no special non-round countersinks, or stringent surface preparation requirements. TukLoc nuts meet or exceed all requirements of industry accepted procurement specifications, including NASM-25027. The TukLoc nuts are available in open and domed (sealed) configurations.

*The GromEx System* has been designed to install titanium or stainless steel grommets in composite materials to reinforce fastener holes. The system works by drawing a mandrel through an internally pre-lubricated grommet. The grommet is expanded into place, creating a fit that is more reliable than adhesively bonded grommets, and with better electrical grounding capability. Due to the complex nature and variety of composites, it is recommended that customers work closely with FTI's Engineering and Technical Sales departments to determine the feasibility of any GromEx application.

---

## Special Tool Design Capabilities

The professional staff at FTI are available to design and manufacture special tooling for all fatigue life enhancement repairs and rework. With over 45 years of proven applications, our experience has covered a wide range of metal and composite solutions. Our in-house Materials Testing Facility provides fatigue life testing in standard and exotic materials, in addition to supporting our Research and Development Team in developing new tooling.

Fatigue Technology's Materials Testing Facility performs state-of-the-art testing of metals and composites. We currently offer the following services:

- Fatigue and crack growth cyclic testing under broadband spectrum and constant amplitude loading
- Automated static testing (tensile, compression, shear, flexure)
- Environmental effects testing (thermal shock, thermal gradient, humidity cycling, ultraviolet/moisture exposure)
- Crack growth rate (da/dN)
- Fracture toughness testing ( $K_{Ic}$ )
- Stress corrosion testing

Related services include automated/manual eddy current inspections, strain gage installations and monitoring, and preparation of photo-electric coatings. Our CNC machining facility and staff is capable of manufacturing any complex fixtures and/or specimens required. FTI believes in being responsive to the unique requirements of each customer, while maintaining a realistic approach to testing as indicated below:

- Automated 24-hour per day test equipment and data collection to increase productivity and meet customer efficiency expectations.
- Flexibility and recognition that procedures and testing methods must often be modified to accommodate unpredictable test results.
- With a focus on test planning and in-process monitoring of data, FTI is able to minimize questions or doubts regarding test results
- Maintaining continuous communication, FTI provides timely, complete reports tailored to each customer's individual needs.



*This page intentionally left blank  
for two-sided printing*

# DETAILED TOOLING


## 2.0 DETAILED TOOLING

Section	Page
2.1	Introduction.....11
2.2	Capital Tooling.....12
2.2.1	Little Brute Puller Unit .....13
2.2.2	Medium Brute Puller Unit .....14
2.2.3	Big Brute Puller Unit.....15
2.2.4	Jumbo Brute Puller Unit.....16
2.2.5	Super Brute Puller Unit.....17
2.2.6	Hand Pullers .....19
2.2.7	Midget Pullers.....21
2.2.8	Little Brute Offset Adapters (LBOA).....23
2.2.9	Hydraulic Offset Adapters (HOA) .....24
2.2.10	Medium Brute Offset Adapter (MBOA) .....25
2.2.11	Medium Brute Hydraulic Offsets (MBHO) .....26
2.2.12	Big Brute Hydraulic Offsets (BBHO).....27
2.2.13	Little Brute Right Angle Adapter.....28
2.2.14	FT-200 PowerPak .....29
2.2.15	FT-220 Power Pak .....30
2.2.16	FT-20 PowerPak .....31
2.2.17	FTP-19 Hand Pump .....32
2.3	Durable Tooling.....33
2.3.1	Starting Drills.....34
2.3.2	Right Angle Starting Drills.....37
2.3.3	Core Drills .....40
2.3.4	Right Angle Core Drills .....43
2.3.5	Starting Reamers .....45
2.3.6	Right Angle Starting Reamers .....48
2.3.7	Gage Finish Reamers .....51
2.3.8	Right Angle Gage Finish Reamers .....54
2.3.9	Combination Gages.....56
2.3.10	Mandrel Gages.....59
2.3.11	Final Hole Gages .....62
2.3.12	Stamp Gages.....63
2.3.13	Mandrels.....65
2.3.14	Little Brute Mandrels .....66
2.3.15	Medium Brute Mandrels .....68
2.3.16	Big Brute Mandrels .....69
2.3.17	Offset Mandrels .....70
2.3.18	Little Brute Offset Adapter Mandrels.....71
2.3.19	Medium Brute Offset Adapter Mandrels.....72
2.3.20	Midget Puller Mandrels .....73
2.3.21	Hydraulic Offset Adapter Mandrels .....74
2.3.22	Right Angle Puller Mandrel.....75
2.3.23	Modular Extension Nosecap Assembly .....76
2.3.24	Modular Extension Nosecap .....77
2.3.25	MEN for Little Brute Offset Adapter .....81
2.3.26	MEN for Medium Brute Offset Adapter .....83
2.3.27	MEN for Medium Brute Hydraulic Offset .....85
2.3.28	Little Brute Nosecap Assemblies.....87
2.3.29	Medium Brute Extension Nosecaps .....90
2.3.30	Big Brute Extension Nosecaps.....93
2.3.31	Little Brute Flush Nosecap Assemblies.....95

# 2.0 DETAILED TOOLING (CONTINUED)


Section	Page
2.3.32 Medium and Big Brute Flush Nosecap Assemblies .....	96
2.3.33 Little Brute Countersink Nosecap Assemblies .....	97
2.3.34 Medium Brute Countersink Nosecap Assemblies .....	98
2.3.35 Countersink Nosecap Assemblies .....	99
2.3.36 Offset Adapter Flush Nosecaps.....	100
2.3.37 Little Brute Offset Adapter Extension Nosecaps .....	102
2.3.38 Medium Brute Offset Adapter Extension Nosecaps .....	105
2.3.39 Medium Brute Hydraulic Offset Extension Nosecaps.....	108
2.3.40 Right Angle Puller Nosecap .....	111
<b>2.4 Expendable Tooling.....</b>	<b>112</b>
2.4.1 Split Sleeves.....	113
2.4.2 Backup Blocks .....	117

For detailed Capital Tooling Operation Manuals please visit our website at [www.fatiguetechnology.com/support-tooling-catalog-operation-manuals.asp](http://www.fatiguetechnology.com/support-tooling-catalog-operation-manuals.asp) or contact your nearest FTI Representative with any additional questions.

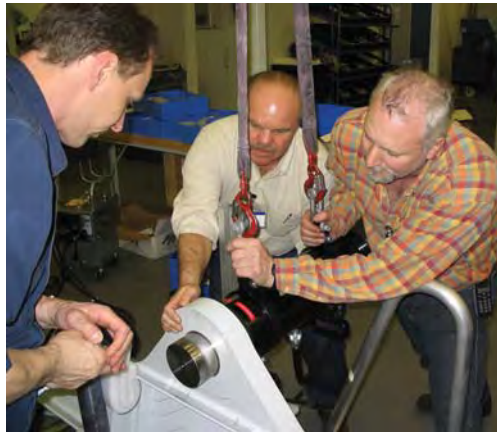

*FTI Tooling is capable of a wide range of small and large applications*

## 2.1 INTRODUCTION

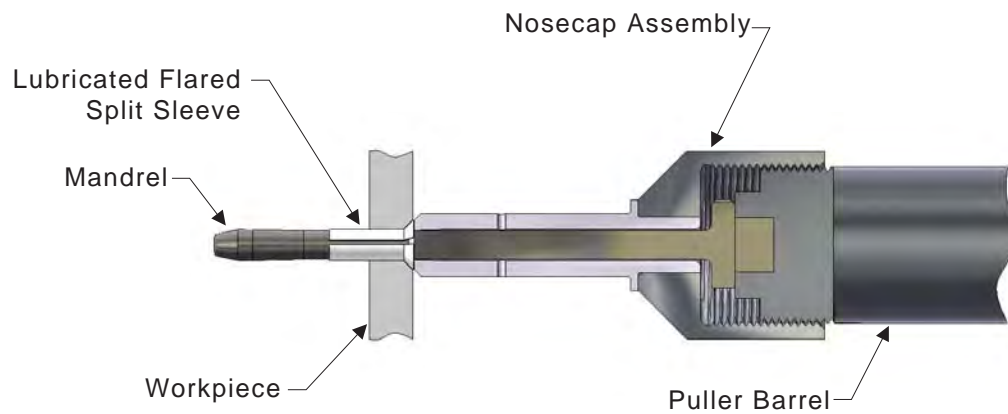

**Figure 2.1-1  
Cold Expansion System Components**

Fatigue Technology's split sleeve cold expansion systems are comprised of compatible pieces of tooling as seen in the above diagram. All tooling is divided into three categories: capital, durable, and expendable tooling.

### Capital Tooling



Hydraulic PowerPaks



Puller Units



Offset Adapters

### Durable Tooling



Cutting Tools



Gages



Mandrels



Nosecap Assemblies

### Expendable Tooling



Split Sleeves




Backup Blocks

*Detailed Tooling  
Page 11*


- UNCONTROLLED IF PRINTED -

## 2.2 CAPITAL TOOLING

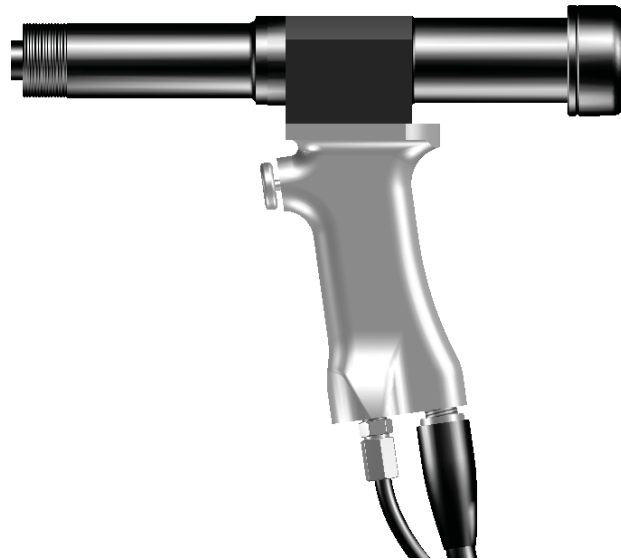

*Puller Units*

*Offset Adapters*

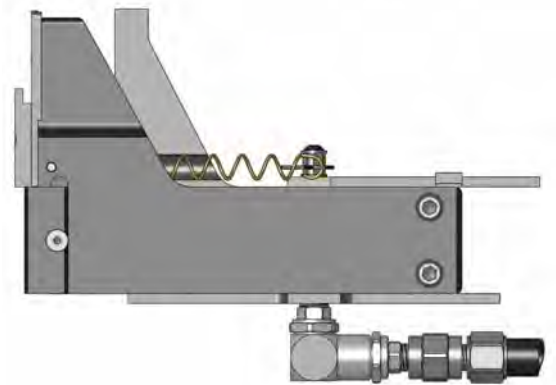


*PowerPaks*

*Detailed Tooling  
Page 12*

- UNCONTROLLED IF PRINTED -

## 2.2.1 LITTLE BRUTE PULLER UNIT (LB)

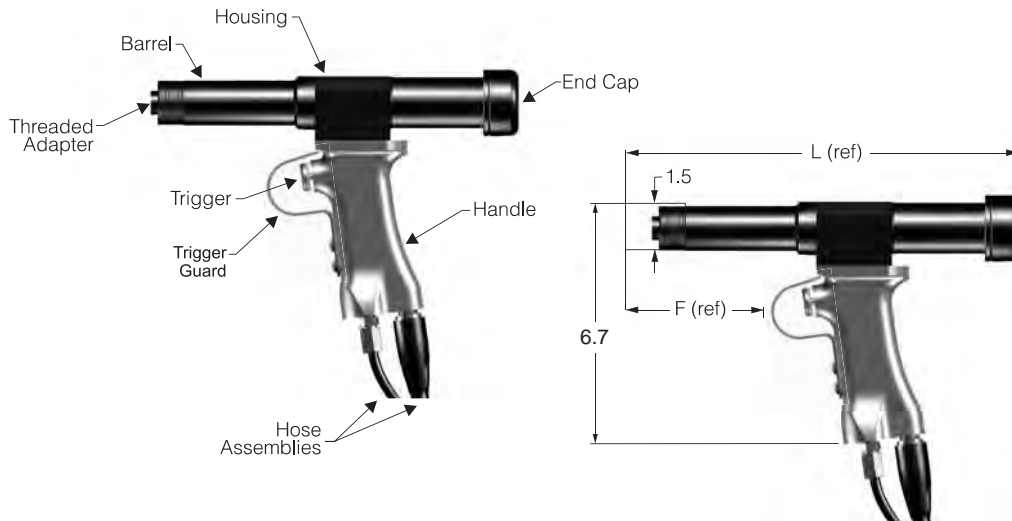

**Figure 2.2-1**  
**Little Brute (LB) Puller Unit**

- Air-actuated, hydraulic puller is capable of cold expanding holes up to 1/2-inch diameter in aluminum and mild steel and up to 3/8-inch diameter in titanium and high-strength steel.
- 8,000 lbs maximum pull force at 10,000 psi hydraulic pressure.
- Includes a 10-foot hose assembly, spanner wrench, and nose cap pin wrench.
- Hydraulic pressure provided by FT-200 or FT-20 PowerPak.
- The LB puller is compatible with FTI extension and flush nose caps (*see nose cap section*).
- The LB puller is directly compatible with standard Type 1 (7/16-20) threaded mandrels.

**Table 2.2-1**  
**Little Brute Specifications**


Model Number	Maximum Material Stackup (inch)	L (Ref. Fig. 2.2-1) (inch)	F (Ref. Fig. 2.2-1) (inch)	Weight (lb.)	Stroke (inch)
LB-10	1.0	9.2	2.56	10.75	2.1
LB-15	1.5	10.2	3.06	11.00	2.6
<b>LB-20</b>	<b>2.0</b>	<b>11.2</b>	<b>3.56</b>	<b>11.25</b>	<b>3.1</b>
LB-25	2.5	12.2	4.06	11.50	3.6
LB-30	3.0	13.2	4.56	11.75	4.1
LB-35	3.5	14.2	5.06	12.00	4.6

**Note:** The LB-20 is standard since material stackups rarely exceed 2 inches in the applicable diameter range. Little Brute is designed for use with all FTI processes.

*Detailed Tooling*  
*Page 13*

- UNCONTROLLED IF PRINTED -

## 2.2.2 MEDIUM BRUTE PULLER UNIT (MB)

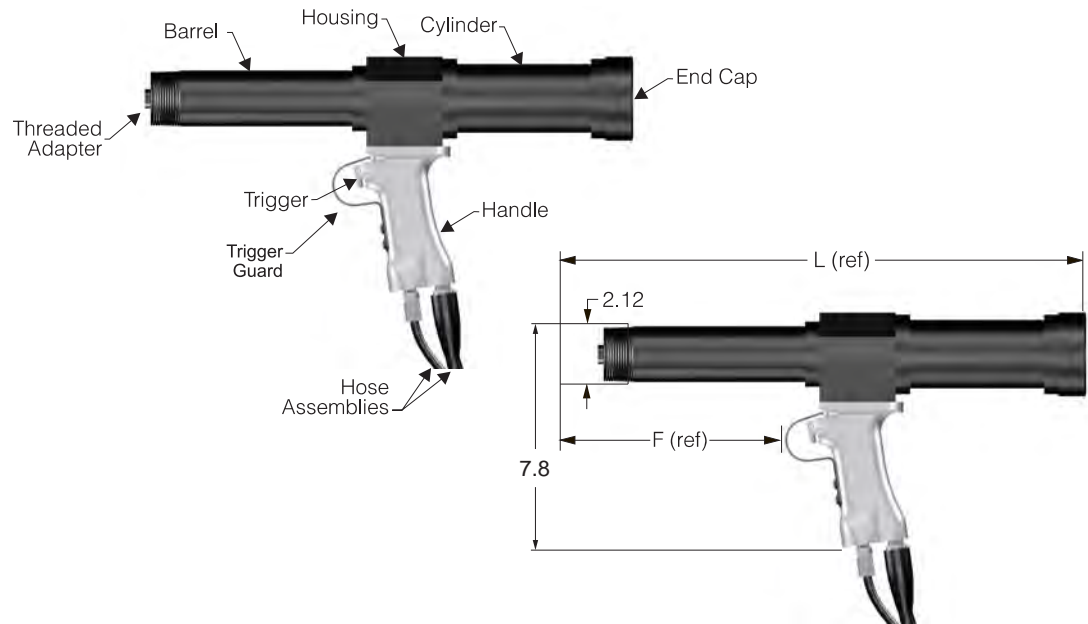

**Figure 2.2-2  
Medium Brute (MB) Puller Unit**


- Air-actuated, hydraulic puller is capable of cold expanding holes up to 15/16-inch diameter in aluminum and mild steel and up to 3/4-inch diameter in titanium and high strength steel.
- 24,000 lbs maximum pull force 10,000 psi of hydraulic pressure.
- Includes a 10-foot hose assembly, 5/8-inch (-2) and 7/8-inch (-5) threaded adapters, spanner wrench, and nose cap pin wrench.
- Hydraulic pressure provided by FT-200 or FT-20 PowerPak.
- The MB puller is compatible with FTI Medium Brute extension and flush nose caps (see nose cap section).
- The MB puller is directly compatible with standard Type 2 (5/8-18) threaded mandrels or may be used with Type 5 (7/8-14) threaded mandrels with the proper threaded adapter.

**Table 2.2-2  
Medium Brute Specifications**

Model Number	Maximum Material Stackup (inch)	L (Ref. Fig. 2.2-2) (inch)	F (Ref. Fig. 2.2-2) (inch)	Weight (lb.)	Stroke (inch)
MB-30	3.3	18.2	7.16	20	5.2
MB-70	7.0	25.5	10.16	24	8.9

**Note:** The MB-30 is standard. Medium Brute is designed for use with all FTI processes.

## 2.2.3 BIG BRUTE PULLER UNIT (BB)

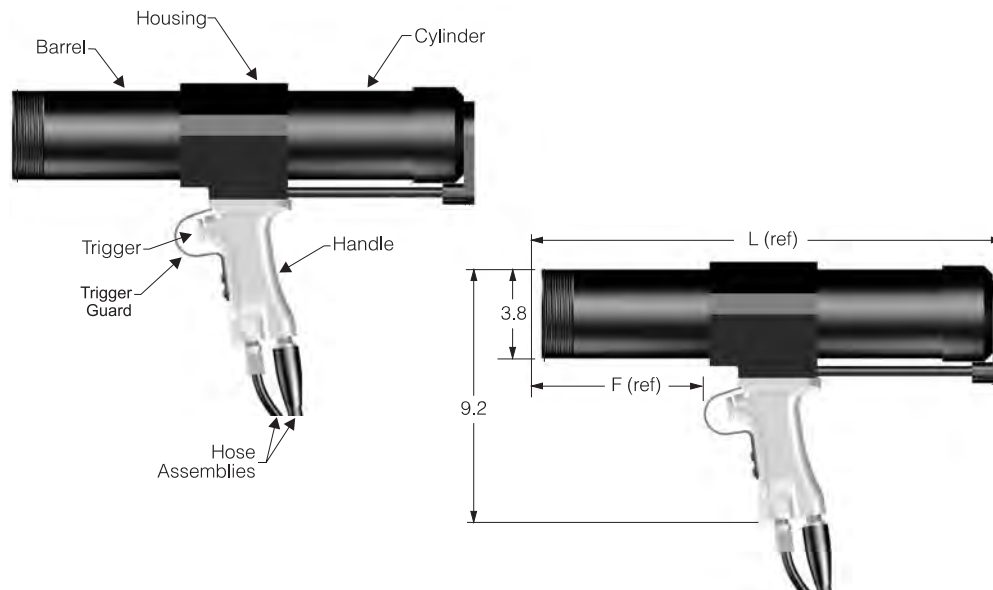

**Figure 2.2-3**  
**Big Brute (BB) Puller Unit**

- Air-actuated, hydraulic puller is capable of cold expanding holes up to 2.5 inches diameter in aluminum and mild steel and up to 1.25 inches diameter in titanium and high strength steel.
- For tool sizes larger than STDN 30-3-N or thick stackups of Ti or high strength steel; smaller tool sizes can be adapted. Contact FTI for more information.
- 38,000 lbs maximum pull force at 10,000 psi hydraulic pressure.
- Includes a 10-foot hose assembly, spanner wrench, and nose cap pin wrench.
- Hydraulic pressure provided by FT-200 or FT-20 PowerPak.
- The BB puller is compatible with both Big Brute flush and extension nose caps (see nose cap section).
- The BB puller is directly compatible with -3, -4, -5, and -9 mandrels (see Table 2.3-15B Attachment Callout & Table 2.3-16B Attachment Callout). Proper mandrel adapter is required.

**Table 2.2-3**  
**Big Brute Specifications**


Model Number	Maximum Material Stackup (inch)	L (Ref. Fig. 2.2-3) (inch)	F (Ref. Fig. 2.2-3) (inch)	Weight (lb.)	Stroke (inch)
BB-RR	0.9	14.9	5.56	30	2.89
<b>BB-30</b>	<b>3.0</b>	<b>23.3</b>	<b>9.06</b>	<b>35</b>	<b>6.26</b>
BB-30A	3.0	23.3	9.06	35	6.26
BB-70	7.0	27.0	11.96	40	9.14
BB-70A	7.0	27.0	11.96	40	9.14
BB-100	10.0	35.3	16.06	45	13.26

Note: The BB-30 is standard. Big Brute is designed for use with all FTI processes.

*Detailed Tooling*  
*Page 15*

- UNCONTROLLED IF PRINTED -

## 2.2.4 JUMBO BRUTE PULLER UNIT (JB)

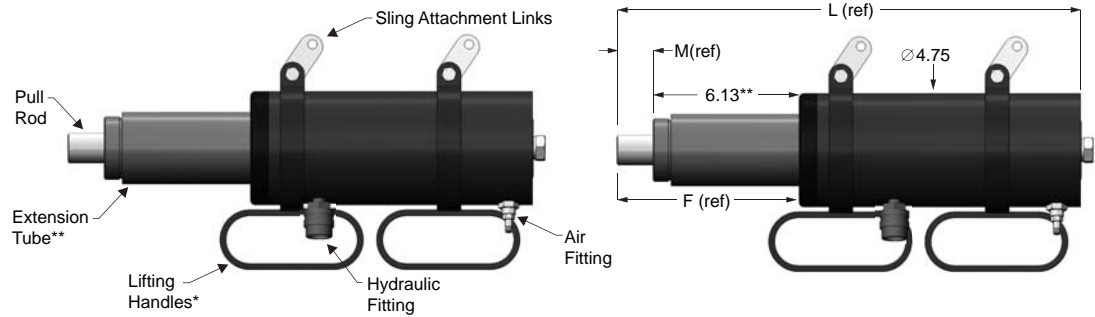

\*Loosen cylinder clamps to reposition handles

\*\*JB-30 series does not use an extension tube.

**Figure 2.2-4**  
**Jumbo Brute (JB) Puller Unit**


- Utilizes pneumatic return system for rapid cycle times.
- 60,000 lbs maximum pull force at 10,000 psi pump pressure.
- Hydraulic pressure is provided by FTI FT-200 PowerPak.
- Remote air trigger required for activation (FTI part number 2049-007).
- Lifting handles provide additional mechanical support during operation.
- The mandrels and nosecaps used with the Jumbo Brute Puller Units are designed to the specific needs of the customer and application requirements.

**Table 2.2-4**  
**Jumbo Brute Specifications**

Model Number	Maximum Material Stackup (inch)	L (Ref. Fig. 2.2-4) (inch)	M (Ref. Fig. 2.2-4) (inch)	Weight (lb.)	Stroke (inch)	F (Ref. Fig. 2.2-4) (inch)
JB-30	2.0	15.70	*	50	3.0	7.35
JB-30A	2.0	12.70	*	48	3.0	4.35
JB-60	~5	19.99	1.50	64	6.0	7.63
JB-60A	~5	19.99	1.55	66	6.0	7.68

\*JB-30 series does not use an extension tube.

## 2.2.5 SUPER BRUTE PULLER UNIT (SB-2A)

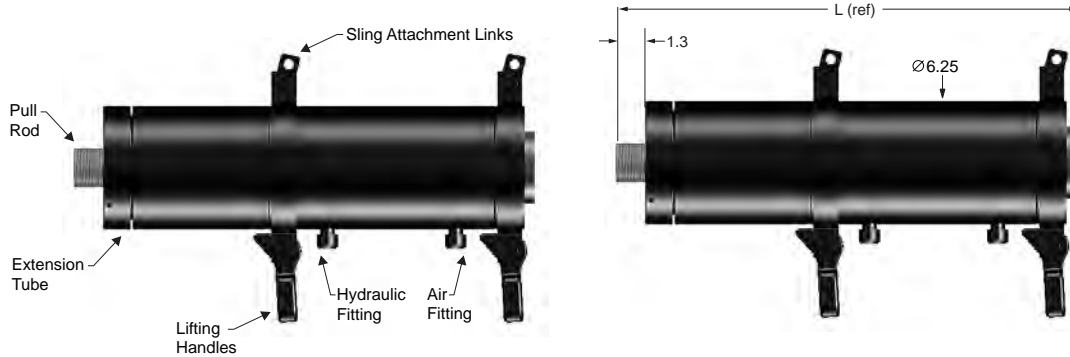

**Figure 2.2-5A**  
**Super Brute (SB-2A) Puller Unit**

- Utilizes pneumatic return system for rapid cycle times.
- 120,000 lbs maximum pull force at 10,000 psi pump pressure.
- Hydraulic pressure is provided by FTI FT-200 PowerPak.
- Remote air trigger required for activation (FTI part number 2049-007).
- Lifting handles provide additional mechanical support during operation.
- The Super Brute Puller Units are application-specific and use special mandrels and nosecaps. Please contact FTI for assistance in selecting tooling.


**Table 2.2-5A**  
**Super Brute Specifications**

Model Number	Maximum Material Stackup (inch)	L (Ref. Fig. 2.2-5A) (inch)	Weight (lb.)	Stroke (inch)
SB-2A	4.0	23.4	120	6.5

*Detailed Tooling  
Page 17*

- UNCONTROLLED IF PRINTED -

## 2.2.5 SUPER BRUTE PULLER UNIT (SB-300B)

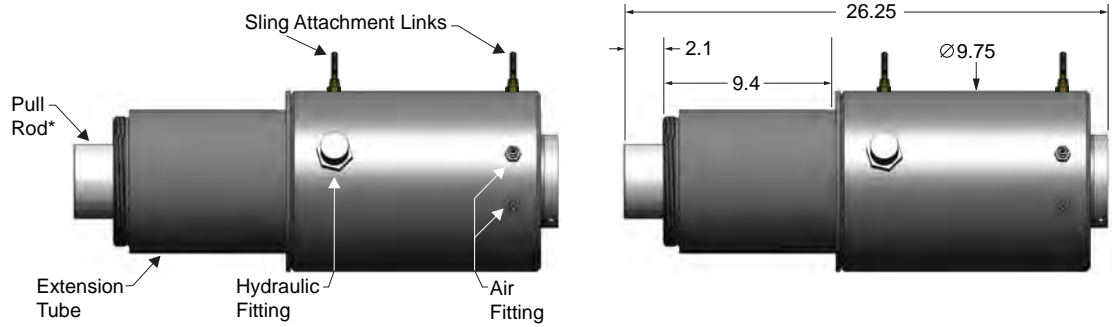

\*Only difference between SB-300A & SB-300B is the thread callout on the pull rod


**Figure 2.2-5B**  
**Super Brute (SB-300B) Puller Unit**

- Utilizes pneumatic return system for rapid cycle times.
- 300,000 lbs maximum pull force at 10,000 psi pump pressure.
- Hydraulic pressure is provided by FTI FT-200 PowerPak.
- Remote air trigger required for activation (FTI part number 2049-007).
- Must use engine leveler to position during operation.
- The Super Brute Puller Units are application-specific and use special mandrels and nosecaps. Please contact FTI for assistance in selecting tooling.

**Table 2.2-5B**  
**Super Brute Specifications**

Model Number	Maximum Material Stackup (inch)	L (Ref. Fig. 2.2-5B) (inch)	Weight (lb.)	Stroke (inch)
SB-300B	~6	26.25	360	8

## 2.2.6 HAND PULLERS (HP-10)

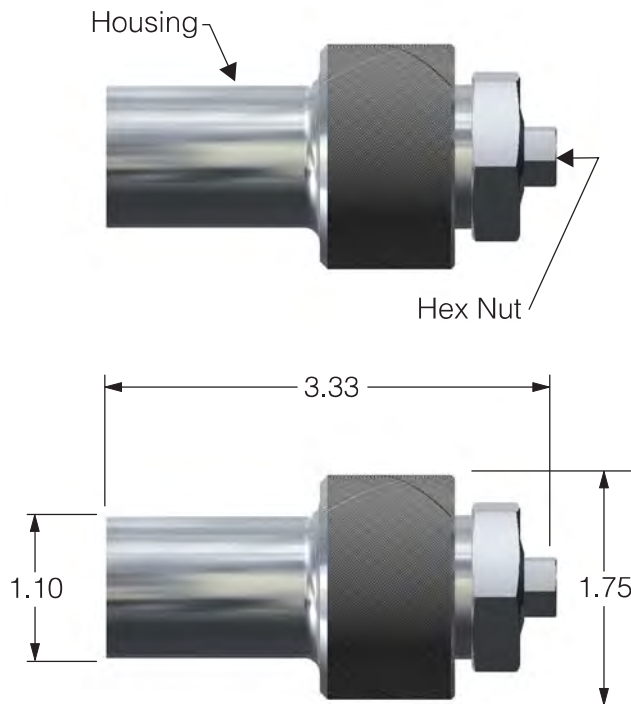


**Figure 2.2-6A**  
**Hand Puller (HP-10)**

- Compact mechanical hand puller ideal for restricted access locations.
- Suitable for cold expanding holes in aluminum up to 1/2-inch diameter and up to 3/8-inch diameter in steel and titanium.
- Pull force of approximately 8,000 lbs.
- Each rotation of the hex nut provides .167 inch of travel.
- A ratchet wrench is included to operate the hand puller.
- Uses Little Brute mandrels with either special flush HP-10 nosecaps or modular extension jaws with "B" threads (see nosecap section 2.3.23 for extension jaw information). Please call FTI Sales Department for additional flush nosecap information.
- Maximum material stackup 1.0 inch; overall length 3.50 inches with flush jaw.

*Detailed Tooling*  
*Page 19*

- UNCONTROLLED IF PRINTED -


## 2.2.6 HAND PULLERS (HP-20)

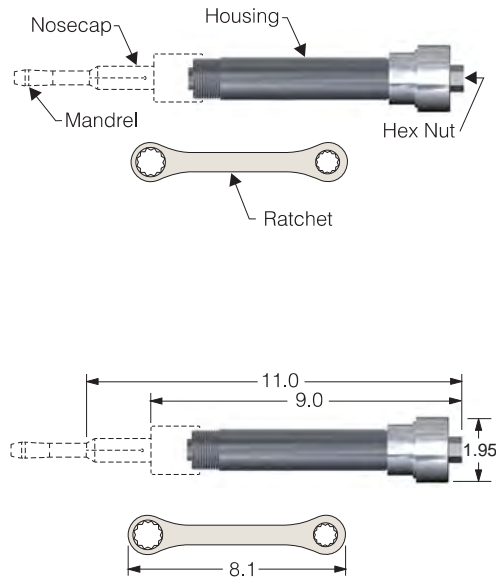

**Figure 2.2-6B**  
**Hand Puller (HP-20)**

- Mechanically actuated puller designed for applications where a limited number of holes are cold expanded.
- Suitable for cold expanding holes in aluminum up to 3/8-inch diameter and up to 1/4-inch diameter in steel and titanium.
- Pull force of approximately 4,000 lbs.
- Each rotation of the hex nut provides .050 inch of travel.
- A ratchet wrench is included to operate the hand puller.
- Uses Little Brute nose caps and mandrels.
- Maximum material stackup 2.0 inches; overall length 11.0 inches when using 2-inch extension nose cap.

## 2.2.7 MIDGET PULLERS (FTMP)

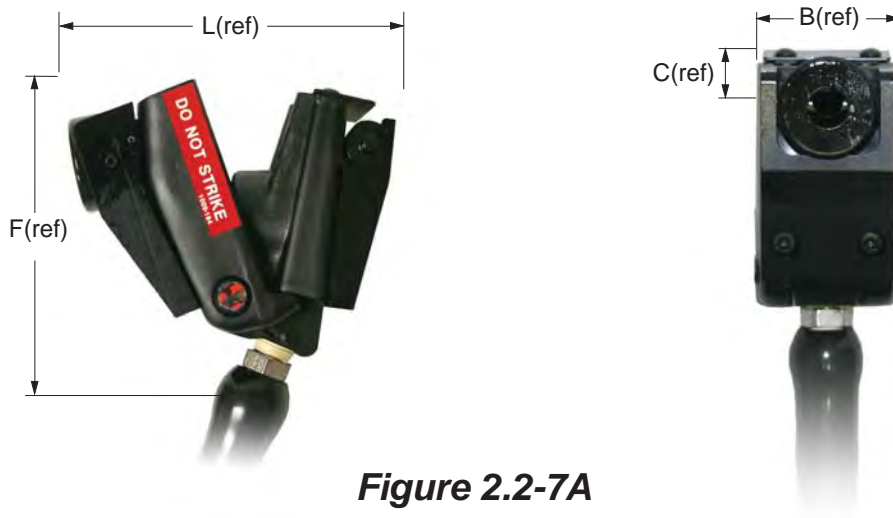

**Figure 2.2-7A**  
**FTMP-7**



**Figure 2.2-7B**  
**Midget Puller (FTMP-12 / FTMP-8)**

- Hydraulic actuated pullers designed for use in severely restricted access areas.
- Weighs approximately 10 lbs with hoses. (10 ft hydraulic hose assembly is included)
- Use Little Brute flush or extension jaws. Modular extension jaws may be used with the proper adapter. Contact FTI for additional information.
- Midget Pullers are powered by the FTP-19 Hand Pump

*Detailed Tooling*  
*Page 21*

- UNCONTROLLED IF PRINTED -

## 2.2.7 MIDGET PULLERS

**Table 2.2-7A  
FTMP Specifications**

Midget Puller Type	Max. Pull Force (lb.)	Max. Hole Dia. in Aluminum (inch)	Max. Hole Dia. in Ti and Steel (inch)	Max. Mandrel Stackup (inch)	Stroke (inch)
FTMP-7	4,000	5/16	1/4	0.75	1.25
FTMP-8	8,000	1/2	3/8	0.8	1.6
FTMP-12	8,000	1/2	3/8	1.2	2.0

Midget Puller Type	Working Front Side Clearance L (Ref. Fig. 2.2-7A-B) (inch)	Lateral Clearance C (Ref. Fig. 2.2-7A-B) (inch)	Width B (Ref. Fig. 2.2-7A-B) (inch)	Working Height Clearance F (Ref. Fig. 2.2-7A-B) (inch)	Compatible Hydraulic PowerPak*
FTMP-7	5.0	.75	2.2	7.0	FTP-19
FTMP-8	4.6	.80	2.5	11.5	FTP-19
FTMP-12	5.0	.80	2.5	11.5	FTP-19

\* Hand pumps are purchased separately.

**Table 2.2-7B  
FTMP Jaw Callout**

Flush Jaw Callout	STDN Range	Extension Jaw Callout	STDN Range
CBC-10-04F	4-0-N thru 4-3-N	CBCE-14A-0401F-JO	4-0-N thru 4-1-N
CBC-10-06F	4-4-N thru 6-3-N	CBCE-14A-0423F-JO	4-2-N thru 4-3-N
CBC-10-08F	6-3-N thru 8-3-N	CBCE-14A-0601F-JO	4-4-N thru 6-1-N
CBC-10-10F	8-3-N thru 10-2-N	CBCE-14A-0623F-JO	8-0-N thru 8-1-N
		CBCE-14A-0801F-JO	6-2-N thru 6-3-N
		CBCE-14A-0823F-JO	8-2-N thru 8-3-N

**Mandrel Selection:** The FTMPs require special FTMP mandrels. See Mandrel section 2.3.20 (page 73).


FTMP-12 and FTMP-8 can use LB mandrels but one inch of length is lost to the puller.

**Sleeve Selection:** The FTMP-7 and FTMP-8 use 3/4-inch long sleeves, CBS-STDN-12F.

The FTMP-12 uses 16F sleeve lengths.

**Ordering Example:** CBM-10-0-N-1-20-V1 Mandrel  
(FTMP-12) CBS-10-0-N-16F Sleeve  
CBC-10-10F Jaw

## 2.2.8 LITTLE BRUTE OFFSET ADAPTERS (LBOA)

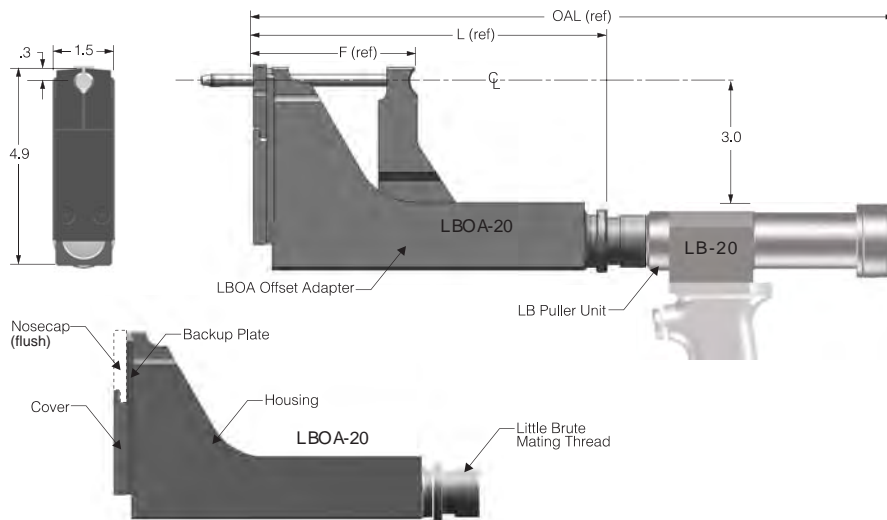

**Figure 2.2-8**  
**Little Brute Offset Adapter (LBOA)**

- Capable of cold expanding holes in restricted access areas up to 1/2 inch diameter in aluminum and mild steel, and 7/16 inch diameter in titanium and high strength steel.
- Attaches to the Little Brute (LB) series of puller units.
- Adapter weighs 6.5 lbs. With LB Puller Unit attached, complete unit weighs approximately 17.0 lbs.
- Requires only 1/4-inch lateral clearance.
- 7,000 lbs maximum pull force (generated by the Little Brute Puller Unit).
- Identification is provided by a machined model number and serial number.

**Table 2.2-8**  
**Little Brute Offset Adapter Specifications (In Inches)**

Model Number	Maximum Material Stackup	Combination Puller and Length OAL (Ref. Fig. 2.2-8)	Adapter Length L (Ref. Fig. 2.2-8)	Frontside Clearance F (Ref. Fig. 2.2-8)	Frontside Clearance F for Units with Barrel Nut Retaining Tab
LBOA-10	1.0	11.8	6.7	3.40	4.05
LBOA-10-RA1*	1.0	11.8	6.7	3.40	4.05
LBOA-10-RA4*	1.0	11.8	6.7	3.40	4.05
LBOA-15	1.5	13.3	7.7	3.90	4.55
<b>LBOA-20</b>	<b>2.0</b>	<b>14.8</b>	<b>8.7</b>	<b>4.40</b>	<b>5.05</b>
LBOA-25	2.5	16.3	9.7	4.90	5.55
LBOA-30	3.0	17.8	10.7	5.40	6.05
LBOA-35	3.5	19.3	11.7	5.90	6.55

\*RA stands for Restricted Access, in which the puller may be used in corners or similar circumstances

**Note:** The LBOA-20 is standard.


**Nosecap Selection:** Refer to nose cap section for applicable LBOA nose caps.

**Mandrel Selection:** Refer to mandrel section for applicable mandrels.

*Detailed Tooling*  
*Page 23*

- UNCONTROLLED IF PRINTED -

## 2.2.9 HYDRAULIC OFFSET ADAPTERS (HOA)

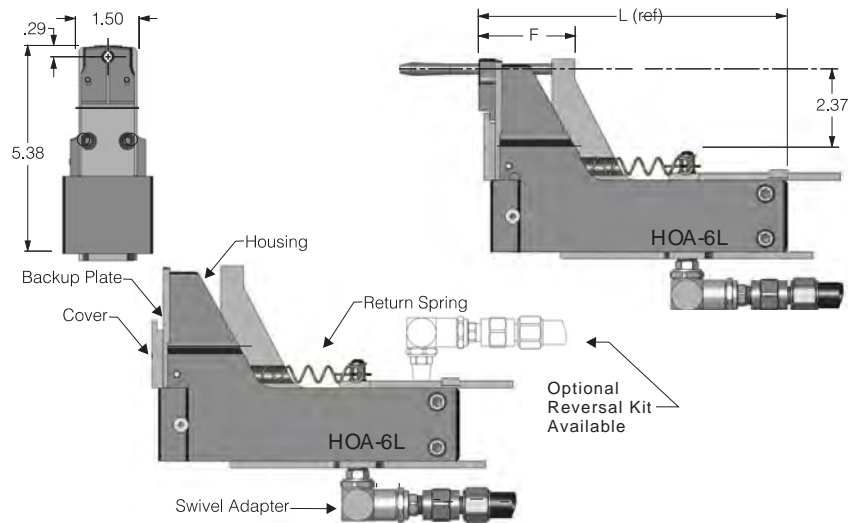

**Figure 2.2-9**  
**Hydraulic Offset Adapter (HOA)**

- For use in severely restricted access areas.
- Use with the FTP-19 hand hydraulic pump (included with purchase of puller unit).
- Capable of cold expanding holes in aluminum or mild steel up to 3/8 inch diameter, and up to 5/16 inch diameter in high strength steel or titanium.
- Up to 2.5 inch material stackup capacity, maximum pull force of 5,000 lbs.
- Weighs 15 lbs with 10-foot hose (dry). Hose is included with all HOAs.
- Hose may be ported top or bottom. (Hose Reversal Kit Available - See Below)

HOA-6L: FTI Hose Reversal Kit Part Number 2816-001  
 HOA-7L: FTI Hose Reversal Kit Part Number 2816-002  
 HOA-8L: FTI Hose Reversal Kit Part Number 2816-003.

- Can be used to cold expand holes with lateral restrictions as low as 0.29 inch.
- Mandrel center line offset is 3 inches.

**Table 2.2-9**  
**Hydraulic Offset Adapter Specifications**


Model Number	Nominal Maximum Stackup (inch)	Overall Length L (Ref. Fig. 2.2-9) (inch)	Frontside Clearance F (Ref. Fig. 2.2-9) (inch)	Stroke (inch)
HOA-6L	1.0	6.4	2.7	1.62
HOA-7L	1.5	7.4	3.1	2.06
HOA-8L	2.0	8.4	3.6	2.49
HOA-9L	2.5	9.5	4.3	2.92

**Note:** FTP-19 Hand Pump is included with the standard HOA-6L

**Nosecap Selection:** The HOA puller is compatible with LBOA flush and extension nose caps. See nose cap section.

**Mandrel Selection:** Refer to mandrel section for applicable mandrels.

## 2.2.10 MEDIUM BRUTE OFFSET ADAPTER (MBOA)

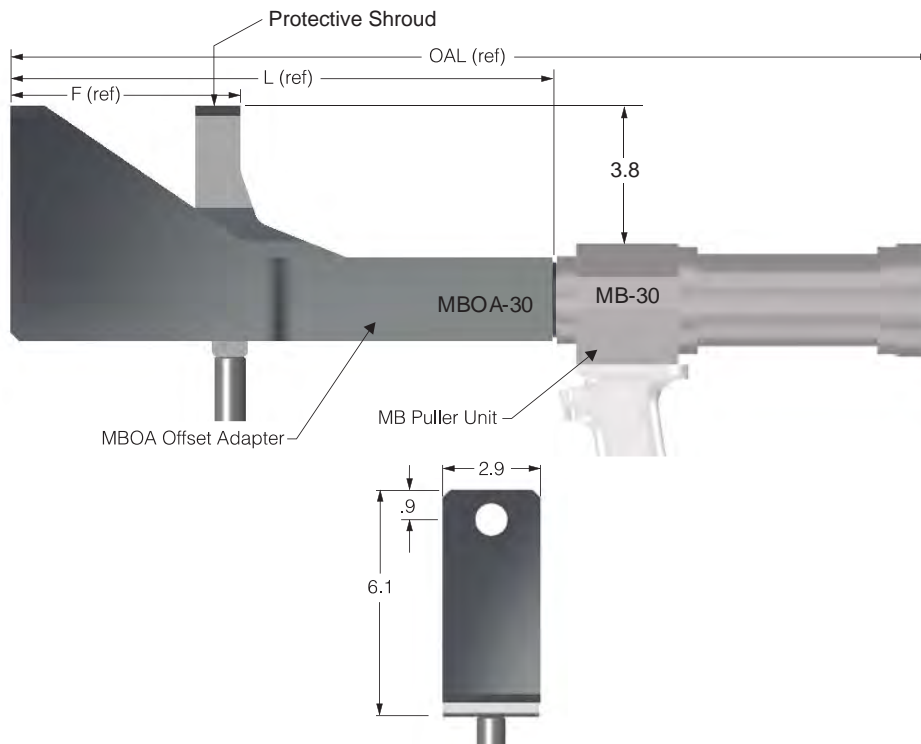

**Figure 2.2-10**  
**Medium Brute Offset Adapter (MBOA)**

- Designed for use with the Medium Brute (MB-30) Puller Unit.
- Capable of cold expanding holes in aluminum and mild steel up to 15/16 inch diameter, and up to 1/2 inch diameter in steel and titanium in restricted access areas.
- Used to cold expand holes with lateral clearances of 0.90 inch.
- A backup plate is included with each offset adapter.
- Weighs 30 lbs. With MB-30 puller attached, unit weighs 47 lbs.
- Identification is provided by an engraved model number and serial number.
- 22,000 lbs maximum pull force (from the Medium Brute Puller Unit).

**Table 2.2-10**  
**Medium Brute Offset Adapter Specifications**

Model Number	Maximum Material Stackup (inch)	Combined Puller and Adapter Length OAL (Ref. Fig. 2.2-10) (inch)	Adapter Length L (Ref. Fig. 2.2-10) (inch)	Frontside Clearance F (Ref. Fig. 2.2-10) (inch)
MBOA-30A	3.0	24.8	14.8	6.8


**Nosecap Selection:** The MBOA uses special MBOA extension and flush nose caps.

**Mandrel Selection:** Refer to mandrel section for applicable mandrels.

*Detailed Tooling*  
*Page 25*

- UNCONTROLLED IF PRINTED -

## 2.2.11 MEDIUM BRUTE HYDRAULIC OFFSETS (MBHO)

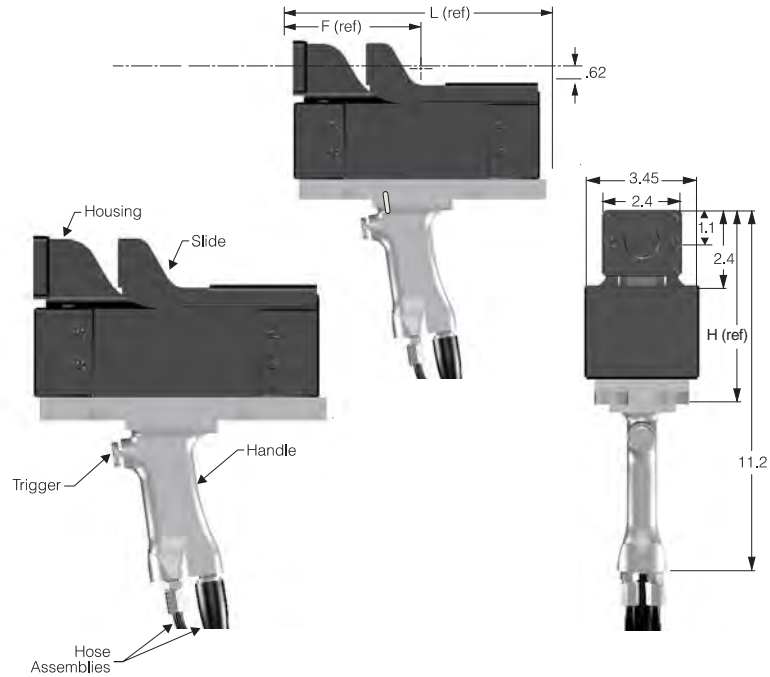

**Figure 2.2-11**  
**Medium Brute Hydraulic Offset (MBHO) Puller**


- Designed to cold expand holes from 3/8 to 15/16 inch diameter in aluminum and mild steel and 3/8 to 3/4 inch diameter in high strength steel and titanium.
- 17,000 lbs maximum pull force at 10,000 psi of hydraulic pressure provided by the FT-20 or FT-200 PowerPak.
- Up to 3.5 inches material stackup capacity with an overall length of 12.1 inches excluding nose cap.
- Weighs 25 lbs with 10-foot hose assembly.
- Uses MBHO nose caps with standard MB replacement jaws. See nose cap section.

**Table 2.2-11**  
**Medium Brute Hydraulic Offset Adapter Specifications**

Model Number	Maximum Material Stackup (inch)	Overall Length L (Ref. Fig. 2.2-11) (inch)	Frontside Clearance F (Ref. Fig. 2.2-11) (inch)	Clearance Height H (Ref. Fig. 2.2-11) (inch)	Stroke (inch)
MBHO-20	2.0	9.1	5.6	6.0	3.1
MBHO-20-1.42	2.0	9.3	6.1	6.0	3.1
MBHO-20-5.6	2.0	9.1	5.6	5.6	3.1
MBHO-35	3.5	12.1	7.1	6.0	4.6
MBHO-35-5.6	3.5	12.1	7.1	5.6	4.6

**Nosecap Selection:** The MBHO puller is compatible with MBHO series of nose caps.  
**Mandrel Selection:** The MBHO puller is directly compatible with the 5/8-inch (Type 20A) threaded Medium Brute Offset Adapter mandrels.

## 2.2.12 BIG BRUTE HYDRAULIC OFFSETS (BBHO)

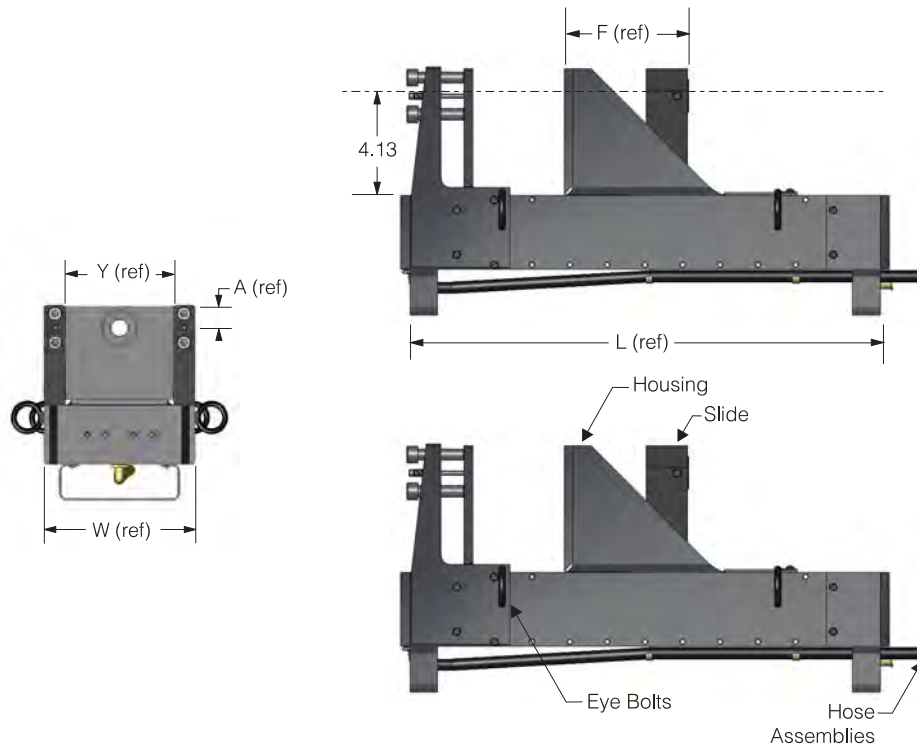

**Figure 2.2-12**  
**Big Brute Hydraulic Offset (BBHO) Puller**

- Designed to cold expand holes up to 2.5 inches diameter in aluminum and mild steel and up to 1 inch diameter in titanium and high strength steel. For other processes such as ForceMate, diameters are greater. Contact FTI for assistance.
- 35,000 lbs maximum pull force at 10,000 psi of hydraulic pressure provided by the FT-200 PowerPak.
- Up to 5.0 inches material stackup capacity.
- Weighs 160 lbs with 10-foot hose assembly.
- The BBHO is a specially designed tool for specific applications involving large holes in restricted access areas. For noscap and/or mandrel selection, contact FTI's Technical Help Desk for assistance.

**Table 2.2-12**  
**Big Brute Hydraulic Offset Specifications**


Model Number	Maximum Material Stackup (inch)	Overall Length L (Ref. Fig. 2.2-12) (inch)	Frontside Clearance F (Ref. Fig. 2.2-12) (inch)	Overall Width W (Ref. Fig. 2.2-12) (inch)	Lateral Clearance A (Ref. Fig. 2.2-12) (inch)	Housing Width Y (Ref. Fig. 2.2-12) (inch)
BBHO-30	5.0	21.09	5.38	5.93	1.49	3.89
BBHO-30A	5.1	22.21	4.18	9.11	1.49	6.28

**Note:** The BBHO-30 is equipped with a tang mandrel attachment and the BBHO-30A is equipped with a threaded mandrel attachment.

*Detailed Tooling*  
*Page 27*

- UNCONTROLLED IF PRINTED -

## 2.2.13 LITTLE BRUTE RIGHT ANGLE ADAPTER (LBRA)

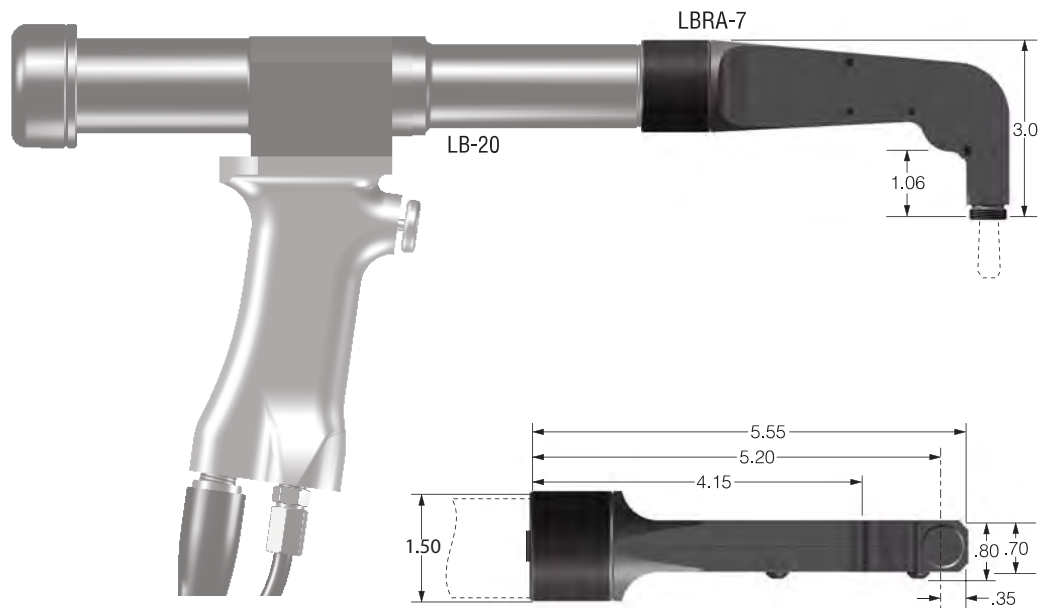

**Figure 2.2-13**  
**Little Brute Right Angle Adapter (LBRA)**

- Operated by attaching to the end of any Little Brute Puller Unit.
- Capable of cold expanding holes up to 0.40 inch diameter in aluminum.
- Pull force of approximately 3,400 lbs.
- Adapter weighs 1.4 lbs.
- Head can rotate 360 degrees on puller unit.
- Adapter may be disassembled to perform routine maintenance.

**Table 2.2-13**  
**LBRA-7 STDN and Maximum Material Stackup**

Model Number	STDN Size	Maximum Sleeve Length	Maximum Material Stackup (inch)
LBRA-7	4-0-N thru 8-1-N	-14F (7/8")	0.840
	8-2-N thru 12-3-N	-12F (3/4")	0.715

**Note:** See mandrel and nose cap sections for correct LBRA-7 tooling.

## 2.2.14 FT-200 POWERPAK



Overall Dimensions  
19"L X 28"H X 12"W

**Figure 2.2-14**  
**FT-200 PowerPak**

- FT-200 PowerPak is used to operate the FTI family of puller units including the Little Brute, Medium Brute, Big Brute, and Medium Brute Hydraulic Offset.
- Air-powered hydraulic unit that utilizes a hydraulic pump driven by an air motor to generate up to 10,000 psi of hydraulic pressure.
- The air motor is driven by compressed air at 90 to 120 psi and 50 cubic feet per minute (cfm) flow through a 3/8 inch or 1/2 inch inside diameter air hose supply.
- The FT-200 is equipped to accept a 1/2 inch hose (not included).
- Weighs 65 lbs when filled with 2 gallons (7.57 liters) of oil (85 lbs shipping weight).
- Wheels are included for portability.
- Typical cycle time is approximately 7 holes per minute in 1/4-inch thick aluminum and 5/16-inch diameter holes.
- Replaces the IW100MF PowerPak.

*Detailed Tooling*  
*Page 29*

- UNCONTROLLED IF PRINTED -


**2.2.15**  
**FT-220**  
**POWER PAK**



**Figure 2.2.15**  
**FT-220 PowerPak**

- Dual acting for hydraulic return puller unit.
- For use with Double Acting Unit.
- Air-powered hydraulic unit that utilizes a hydraulic pump to generate up to 10,000 psi of hydraulic pressure.
- The air motor is driven by compressed air at 90 to 120 psi and 50 cubic feet per minute (cfm) flow through a 1/2-inch inside diameter air hose supply.
- Weighs 65 lbs when filled with 2 gallons (7.57 liters) of oil (85 lbs shipping weight).
- Wheels are included for portability.

## 2.2.16 FT-20 POWERPAK

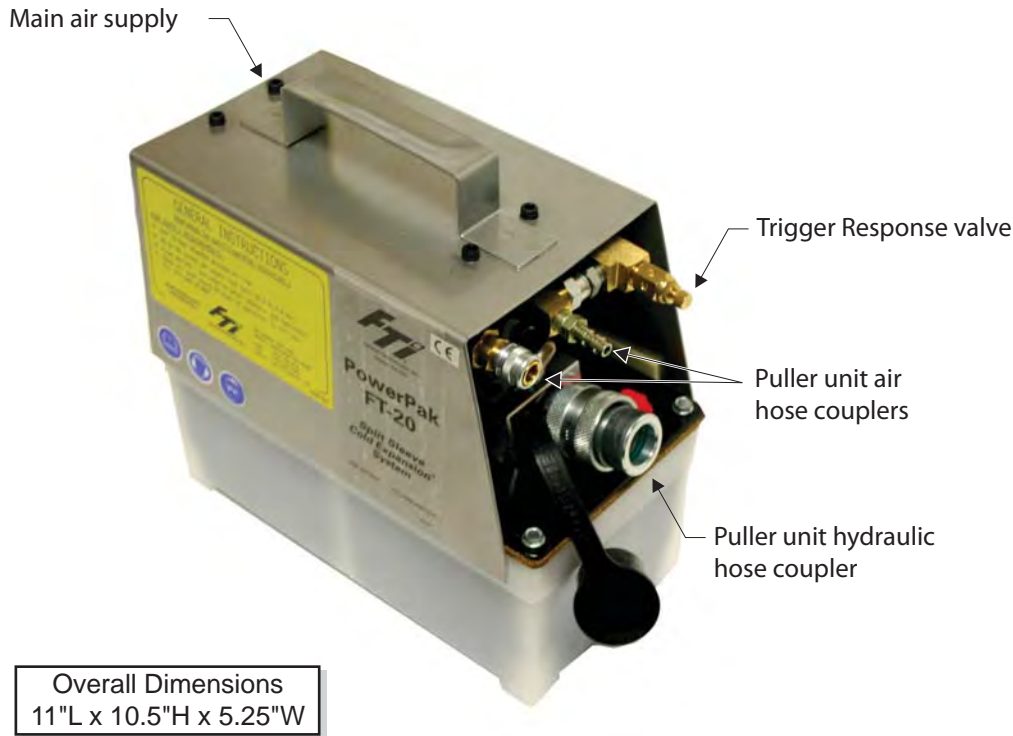

**Figure 2.2-16**  
**FT-20 PowerPak**

- Used to operate the FTI standard series of puller units, including the Little Brute, Medium Brute, and Big Brute.
- Air-powered hydraulic unit.
- Lightweight and portable design to be used for applications where mobility is a key consideration.
- Weighs 18 lbs when filled with .45 gallons (1.72 liters) of oil (20 lbs shipping weight).
- Supplies up to 10,000 psi hydraulic pressure to the puller unit.
- The air motor is driven by compressed air at 90 to 120 psi and 20 cubic feet per minute (cfm) flow through a 3/8-inch inside diameter supply air hose.
- Equipped with a 3/8-inch diameter male quick disconnect air inlet fitting.
- Replaces the IW10MF PowerPak.

*Detailed Tooling*  
*Page 31*

- UNCONTROLLED IF PRINTED -

## 2.2.17 FTP-19 HAND PUMP



**Figure 2.2-17**  
**FTP-19 Hand Pump**

- Manually operated pump allows improved control of pullers during cold expansion.
- Weighs 6.6 lbs when filled with hydraulic fluid.
- Provides power for the FTMP-7 Midget Puller and the HOA offset puller.
- Provides up to 10,000 psi of hydraulic pressure.
- Identification is provided by decals on reservoir.

**Table 2.2-17**  
**FTP-19 Specifications**

Model Number	Pressure Rating (psi)	Reservoir Capacity (cubic inches)
FTP-19	10,000	24.4

**2.3**  
**DURABLE**  
**TOOLING**



***Drills***



***Reamers***




***Gages***




***Mandrels***

## 2.3.1 STARTING DRILLS

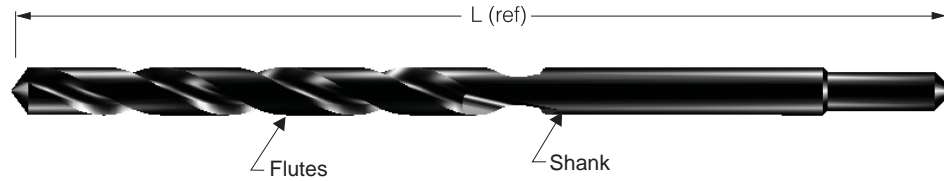

**Figure 2.3-1  
Starting Drill**

- Used to create new holes in production or remove large amounts of material in rework.
- Designed to reduce the amount of force necessary to drill a hole; provides improved hole surface quality; split point feature improves accuracy of hole location.
- Identification is provided by an electroetched model number and a single-line ground or electroetched mark on the shank, indicating the first cutting tool operation.
- Available in high-strength steel, cobalt, or carbide. High-speed steel drills are most common, but cobalt and carbide drills are available for special applications.
- Special lengths and attachments are available upon request. For tooling outside standard tooling range, please contact our Sales Staff.

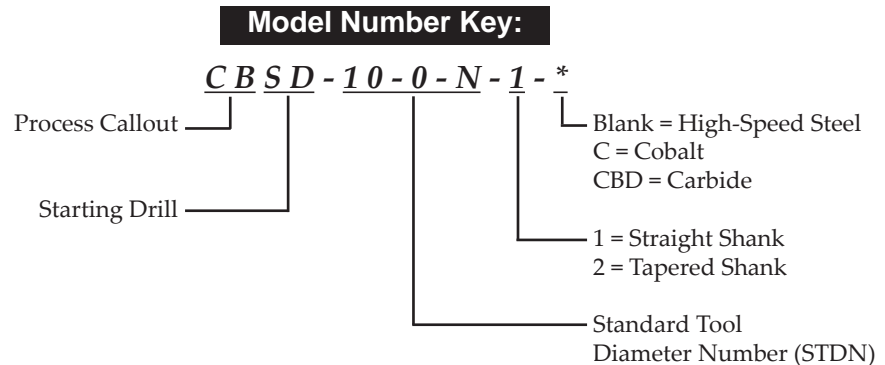

**Table 2.3-1A  
(CB) Starting Drills**

**2.3.1  
(CB)  
STARTING  
DRILLS**

STDN	Model Number	L (Ref. Fig. 2.3-1) (inch)
4-0-N	CBSD-4-0-N-1	4.62
4-1-N	CBSD-4-1-N-1	5.12
4-2-N	CBSD-4-2-N-1	5.37
4-3-N	CBSD-4-3-N-1	5.37
4-4-N	CBSD-4-4-N-1	5.75
6-0-N	CBSD-6-0-N-1	5.75
6-1-N	CBSD-6-1-N-1	5.75
6-2-N	CBSD-6-2-N-1	6.00
6-3-N	CBSD-6-3-N-1	6.00
8-0-N	CBSD-8-0-N-1	6.00
8-1-N	CBSD-8-1-N-1	6.12
8-2-N	CBSD-8-2-N-1	6.12
8-3-N	CBSD-8-3-N-1	6.25
10-0-N	CBSD-10-0-N-1	6.25
10-1-N	CBSD-10-1-N-1	6.37
10-2-N	CBSD-10-2-N-1	6.37
10-3-N	CBSD-10-3-N-1	6.50
12-0-N	CBSD-12-0-N-1	6.50
12-1-N	CBSD-12-1-N-1	6.75
12-2-N	CBSD-12-2-N-1	6.75
12-3-N	CBSD-12-3-N-1	7.00
14-0-N	CBSD-14-0-N-1	7.00
14-1-N	CBSD-14-1-N-1	7.25
14-2-N	CBSD-14-2-N-1	7.25
14-3-N	CBSD-14-3-N-1	7.25
16-0-N	CBSD-16-0-N-1	7.50
16-1-N	CBSD-16-1-N-1	7.50
16-2-N	CBSD-16-2-N-1	7.75
16-3-N	CBSD-16-3-N-1	7.75

STDN	Model Number	L (Ref. Fig. 2.3-1) (inch)
18-0-N	CBSD-18-0-N-1	8.00
18-1-N	CBSD-18-1-N-1	8.00
18-2-N	CBSD-18-2-N-1	8.25
18-3-N	CBSD-18-3-N-1	8.25
20-0-N	CBSD-20-0-N-1	8.25
20-1-N	CBSD-20-1-N-1	8.75
20-2-N	CBSD-20-2-N-1	8.75
20-3-N	CBSD-20-3-N-1	8.75
22-0-N	CBSD-22-0-N-1	8.75
22-1-N	CBSD-22-1-N-1	9.00
22-2-N	CBSD-22-2-N-1	9.00
22-3-N	CBSD-22-3-N-1	9.25
24-0-N	CBSD-24-0-N-1	9.25
24-1-N	CBSD-24-1-N-1	9.50
24-2-N	CBSD-24-2-N-1	9.50
24-3-N	CBSD-24-3-N-1	9.75
26-0-N	CBSD-26-0-N-1	9.75
26-1-N	CBSD-26-1-N-1	9.87
26-2-N	CBSD-26-2-N-1	9.87
26-3-N	CBSD-26-3-N-1	10.00
28-0-N	CBSD-28-0-N-1	10.00
28-1-N	CBSD-28-1-N-1	10.00
28-2-N	CBSD-28-2-N-1	10.00
28-3-N	CBSD-28-3-N-1	10.00
30-0-N	CBSD-30-0-N-1	10.00
30-1-N	CBSD-30-1-N-1	10.00
30-2-N	CBSD-30-2-N-1	10.00
30-3-N	CBSD-30-3-N-1	10.75

## 2.3.1 STARTING DRILLS

**Table 2.3-1B  
CA Starting Drills**

STDN	Model Number	L (Ref. Fig. 2.3-1) (inch)
20	CASD-20-1	4.62
21	CASD-21-1	5.12
22	CASD-22-1	5.37
23	CASD-23-1	5.37
30	CASD-30-1	5.37
31	CASD-31-1	5.75
32	CASD-32-1	5.75
33	CASD-33-1	6.00
40	CASD-40-1	6.00
41	CASD-41-1	6.12
42	CASD-42-1	6.12
43	CASD-43-1	6.25
50	CASD-50-1	6.25
51	CASD-51-1	6.25
52	CASD-52-1	6.37
53	CASD-53-1	6.50
60	CASD-60-1	6.50
61	CASD-61-1	6.75
62	CASD-62-1	6.75
63	CASD-63-1	7.00
70	CASD-70-1	7.00
71	CASD-71-1	7.00
72	CASD-72-1	7.25
73	CASD-73-1	7.25
80	CASD-80-1	7.50
81	CASD-81-1	7.50
82	CASD-82-1	7.75
83	CASD-83-1	7.75
90	CASD-90-1	7.75
91	CASD-91-1	8.00
92	CASD-92-1	8.00
93	CASD-93-1	8.25
100	CASD-100-1	8.25
101	CASD-101-1	8.75
102	CASD-102-1	8.75
103	CASD-103-1	8.75
110	CASD-110-1	8.75
111	CASD-111-1	9.00

**Table 2.3-1C  
KB2 Starting Drills**


STDN	Model Number	L (Ref. Fig. 2.3-1) (inch)
40-****-0	KB2SD-40-****-0-1	5.12
41-****-0	KB2SD-41-****-0-1	5.37
42-****-0	KB2SD-42-****-0-1	5.37
43-****-0	KB2SD-43-****-0-1	5.75
60-****-0	KB2SD-60-****-0-1	5.75
61-****-0	KB2SD-61-****-0-1	5.75
62-****-0	KB2SD-62-****-0-1	6.00
63-****-0	KB2SD-63-****-0-1	6.00
80-****-0	KB2SD-80-****-0-1	6.12
81-****-0	KB2SD-81-****-0-1	6.12
82-****-0	KB2SD-82-****-0-1	6.25
83-****-0	KB2SD-83-****-0-1	6.25
100-****-0	KB2SD-100-****-0-1	6.37
101-****-0	KB2SD-101-****-0-1	6.37
102-****-0	KB2SD-102-****-0-1	6.50
103-****-0	KB2SD-103-****-0-1	6.50
120-****-0	KB2SD-120-****-0-1	6.75
121-****-0	KB2SD-121-****-0-1	6.75
122-****-0	KB2SD-122-****-0-1	7.00
123-****-0	KB2SD-123-****-0-1	7.00

\* Lengths may vary depending on tooling type.  
\*\*\*\* Refer to Cx2s Tooling for STDN information.

**Table 2.3-1D  
CR Starting Drills**

STDN	Model Number	L (Ref. Fig. 2.3-1) (inch)
R30	CRSD-R30-1	5.37
R32	CRSD-R32-1	5.75
R40	CRSD-R40-1	6.00
R42	CRSD-R42-1	6.12
R50	CRSD-R50-1	6.25
R52	CRSD-R52-1	6.37
R60	CRSD-R60-1	6.50
R62	CRSD-R62-1	6.75


## 2.3.2 RIGHT ANGLE STARTING DRILLS

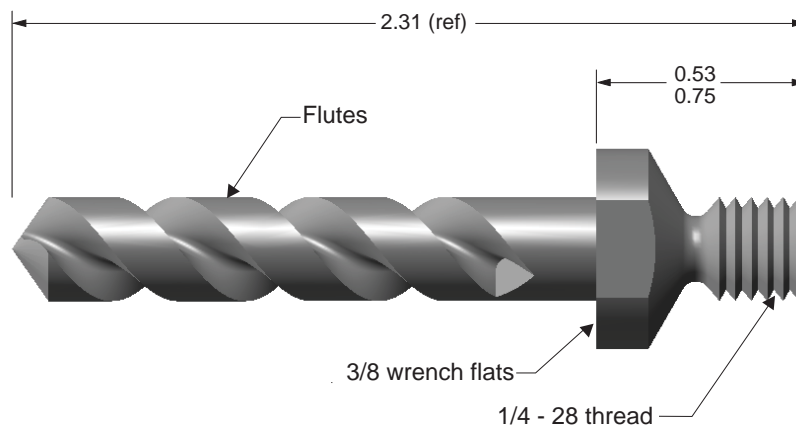

**Figure 2.3-2**  
**Right Angle Starting Drill**

- Used as starting drills to create holes in applications that have restricted front side clearance.
- The split point configuration reduces the amount of force necessary to drill a hole, and provides improved hole surface quality.
- Identification is provided by an electroetched STDN and a single-line ground or electroetched mark on wrench flat.
- Shorter lengths are available upon request.
- Standard CB, KB, and CR drills are high-speed steel; standard CA drills are cobalt.

### Model Number Key:

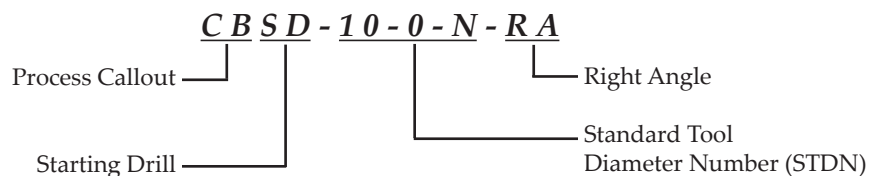

*Detailed Tooling*  
*Page 37*

- UNCONTROLLED IF PRINTED -

## 2.3.2 RIGHT ANGLE STARTING DRILLS

**Table 2.3-2A  
CB Starting Drills**

STDN	Model Number
4-0-N	CBSD-4-0-N-RA
4-1-N	CBSD-4-1-N-RA
4-2-N	CBSD-4-2-N-RA
4-3-N	CBSD-4-3-N-RA
4-4-N	CBSD-4-4-N-RA
6-0-N	CBSD-6-0-N-RA
6-1-N	CBSD-6-1-N-RA
6-2-N	CBSD-6-2-N-RA
6-3-N	CBSD-6-3-N-RA
8-0-N	CBSD-8-0-N-RA
8-1-N	CBSD-8-1-N-RA
8-2-N	CBSD-8-2-N-RA
8-3-N	CBSD-8-3-N-RA
10-0-N	CBSD-10-0-N-RA
10-1-N	CBSD-10-1-N-RA
10-2-N	CBSD-10-2-N-RA
10-3-N	CBSD-10-3-N-RA
12-0-N	CBSD-12-0-N-RA
12-1-N	CBSD-12-1-N-RA
12-2-N	CBSD-12-2-N-RA
12-3-N	CBSD-12-3-N-RA

**Table 2.3-2B  
CA Starting Drills**

STDN	Model Number
20	CASD-20-RA
21	CASD-21-RA
22	CASD-22-RA
23	CASD-23-RA
30	CASD-30-RA
31	CASD-31-RA
32	CASD-32-RA
33	CASD-33-RA
40	CASD-40-RA
41	CASD-41-RA
42	CASD-42-RA
43	CASD-43-RA
50	CASD-50-RA
51	CASD-51-RA
52	CASD-52-RA
53	CASD-53-RA
60	CASD-60-RA
61	CASD-61-RA
62	CASD-62-RA
63	CASD-63-RA
70	CASD-70-RA

**Table 2.3-2C  
KB2 Starting Drills**

STDN	Model Number
40-****-0	KB2SD-40-****-0-RA
41-****-0	KB2SD-41-****-0-RA
42-****-0	KB2SD-42-****-0-RA
43-****-0	KB2SD-43-****-0-RA
60-****-0	KB2SD-60-****-0-RA
61-****-0	KB2SD-61-****-0-RA
62-****-0	KB2SD-62-****-0-RA
63-****-0	KB2SD-63-****-0-RA
80-****-0	KB2SD-80-****-0-RA
81-****-0	KB2SD-81-****-0-RA
82-****-0	KB2SD-82-****-0-RA
83-****-0	KB2SD-83-****-0-RA
100-****-0	KB2SD-100-****-0-RA
101-****-0	KB2SD-101-****-0-RA
102-****-0	KB2SD-102-****-0-RA
103-****-0	KB2SD-103-****-0-RA
120-****-0	KB2SD-120-****-0-RA
121-****-0	KB2SD-121-****-0-RA
122-****-0	KB2SD-122-****-0-RA
123-****-0	KB2SD-123-****-0-RA


\*\*\* Refer to Cx2s Tooling for STDN information.

**Table 2.3-2D  
CR Starting Drills**

STDN	Model Number
R30	CRSD-30-RA
R32	CRSD-32-RA
R40	CRSD-40-RA
R42	CRSD-42-RA
R50	CRSD-50-RA
R52	CRSD-52-RA
R60	CRSD-60-RA
R62	CRSD-62-RA

**2.3.2  
RIGHT ANGLE  
STARTING  
DRILLS**


## 2.3.3 CORE DRILLS

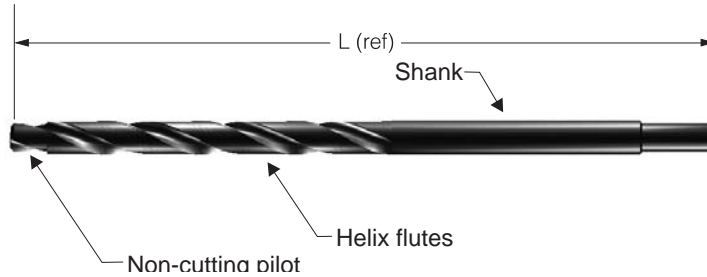

**Figure 2.3-3  
Core Drill**

- Used in rework applications to prepare existing holes for a starting reamer.
- Helical flutes give material removal capability comparable to a twist drill.
- A non-cutting pilot, sized to .001 to .002 inch under the existing hole, followed by cutting flutes gives the locational and dimensional accuracy characteristics of a reamer.
- Identification is provided by an electroetched model number and a single line ground or electroetched on the shank, indicating the first cutting tool operation.
- High-speed steel material is standard. Carbide material can be provided for special applications.
- Pilot diameter (customer supplied) is equal to the minimum existing hole diameter minus approximately .001 inch (in .001 inch increments).
- For other sizes please contact our Sales Staff.

**Model Number Key:**

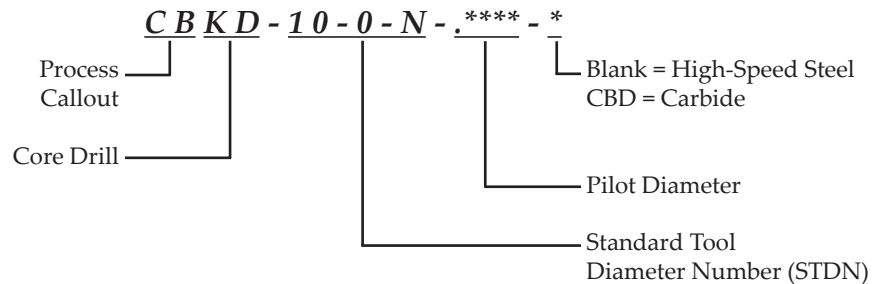

**Table 2.3-3A  
CB Core Drills**

**2.3.3  
CORE DRILLS**

STDN	Model Number	L (Ref. Fig. 2.3-3) (inch)
4-0-N	CBKD-4-0-N-.****	4.62
4-1-N	CBKD-4-1-N-.****	5.12
4-2-N	CBKD-4-2-N-.****	5.37
4-3-N	CBKD-4-3-N-.****	5.37
4-4-N	CBKD-4-4-N-.****	5.75
6-0-N	CBKD-6-0-N-.****	5.75
6-1-N	CBKD-6-1-N-.****	5.75
6-2-N	CBKD-6-2-N-.****	6.00
6-3-N	CBKD-6-3-N-.****	6.00
8-0-N	CBKD-8-0-N-.****	6.00
8-1-N	CBKD-8-1-N-.****	6.12
8-2-N	CBKD-8-2-N-.****	6.12
8-3-N	CBKD-8-3-N-.****	6.25
10-0-N	CBKD-10-0-N-.****	6.25
10-1-N	CBKD-10-1-N-.****	6.37
10-2-N	CBKD-10-2-N-.****	6.37
10-3-N	CBKD-10-3-N-.****	6.50
12-0-N	CBKD-12-0-N-.****	6.50
12-1-N	CBKD-12-1-N-.****	6.75
12-2-N	CBKD-12-2-N-.****	6.75
12-3-N	CBKD-12-3-N-.****	7.00
14-0-N	CBKD-14-0-N-.****	7.00
14-1-N	CBKD-14-1-N-.****	7.25
14-2-N	CBKD-14-2-N-.****	7.25
14-3-N	CBKD-14-3-N-.****	7.25
16-0-N	CBKD-16-0-N-.****	7.50
16-1-N	CBKD-16-1-N-.****	7.50
16-2-N	CBKD-16-2-N-.****	7.75
16-3-N	CBKD-16-3-N-.****	7.75

STDN	Model Number	L (Ref. Fig. 2.3-3) (inch)
18-0-N	CBKD-18-0-N-.****	8.00
18-1-N	CBKD-18-1-N-.****	8.00
18-2-N	CBKD-18-2-N-.****	8.25
18-3-N	CBKD-18-3-N-.****	8.25
20-0-N	CBKD-20-0-N-.****	8.25
20-1-N	CBKD-20-1-N-.****	8.75
20-2-N	CBKD-20-2-N-.****	8.75
20-3-N	CBKD-20-3-N-.****	8.75
22-0-N	CBKD-22-0-N-.****	8.75
22-1-N	CBKD-22-1-N-.****	9.00
22-2-N	CBKD-22-2-N-.****	9.00
22-3-N	CBKD-22-3-N-.****	9.25
24-0-N	CBKD-24-0-N-.****	9.25
24-1-N	CBKD-24-1-N-.****	9.50
24-2-N	CBKD-24-2-N-.****	9.50
24-3-N	CBKD-24-3-N-.****	9.75
26-0-N	CBKD-26-0-N-.****	9.75
26-1-N	CBKD-26-1-N-.****	9.87
26-2-N	CBKD-26-2-N-.****	9.87
26-3-N	CBKD-26-3-N-.****	10.00
28-0-N	CBKD-28-0-N-.****	10.00
28-1-N	CBKD-28-1-N-.****	10.00
28-2-N	CBKD-28-2-N-.****	10.00
28-3-N	CBKD-28-3-N-.****	10.00
30-0-N	CBKD-30-0-N-.****	10.00
30-1-N	CBKD-30-1-N-.****	10.00
30-2-N	CBKD-30-2-N-.****	10.00
30-3-N	CBKD-30-3-N-.****	10.75

## 2.3.3 CORE DRILLS

**Table 2.3-3B  
CA Core Drills**

STDN	Model Number	L (Ref. Fig. 2.3-3) (inch)
20	CAKD-20-.****	2.37
21	CAKD-21-.****	2.62
22	CAKD-22-.****	2.75
23	CAKD-23-.****	3.00
30	CAKD-30-.****	5.37
31	CAKD-31-.****	5.75
32	CAKD-32-.****	5.75
33	CAKD-33-.****	6.00
40	CAKD-40-.****	6.00
41	CAKD-41-.****	6.12
42	CAKD-42-.****	6.12
43	CAKD-43-.****	6.12
50	CAKD-50-.****	6.25
51	CAKD-51-.****	6.25
52	CAKD-52-.****	6.37
53	CAKD-53-.****	6.37
60	CAKD-60-.****	6.50
61	CAKD-61-.****	6.50
62	CAKD-62-.****	6.75
63	CAKD-63-.****	6.75
70	CAKD-70-.****	7.00
71	CAKD-71-.****	7.00
72	CAKD-72-.****	7.25
73	CAKD-73-.****	7.25
80	CAKD-80-.****	7.50
81	CAKD-81-.****	7.75
82	CAKD-82-.****	7.75
83	CAKD-83-.****	7.75
90	CAKD-90-.****	7.75
91	CAKD-91-.****	8.00
92	CAKD-92-.****	8.00
93	CAKD-93-.****	8.25
100	CAKD-100-.****	8.25
101	CAKD-101-.****	8.75
102	CAKD-102-.****	8.75
103	CAKD-103-.****	8.75
110	CAKD-110-.****	8.75
111	CAKD-111-.****	9.00

**Table 2.3-3C  
KB2 Core Drills**

STDN	Model Number	L (Ref. Fig. 2.3-3) (inch)
40-****-0	KB2KD-40-****-0-.****	5.12
41-****-0	KB2KD-41-****-0-.****	5.37
42-****-0	KB2KD-42-****-0-.****	5.37
43-****-0	KB2KD-43-****-0-.****	5.75
60-****-0	KB2KD-60-****-0-.****	5.75
61-****-0	KB2KD-61-****-0-.****	5.75
62-****-0	KB2KD-62-****-0-.****	6.00
63-****-0	KB2KD-63-****-0-.****	6.00
80-****-0	KB2KD-80-****-0-.****	6.12
81-****-0	KB2KD-81-****-0-.****	6.12
82-****-0	KB2KD-82-****-0-.****	6.25
83-****-0	KB2KD-83-****-0-.****	6.25
100-****-0	KB2KD-100-****-0-.****	6.37
101-****-0	KB2KD-101-****-0-.****	6.37
102-****-0	KB2KD-102-****-0-.****	6.50
103-****-0	KB2KD-103-****-0-.****	6.50
120-****-0	KB2KD-120-****-0-.****	6.75
121-****-0	KB2KD-121-****-0-.****	6.75
122-****-0	KB2KD-122-****-0-.****	7.00
123-****-0	KB2KD-123-****-0-.****	7.00

\*\*\* Refer to Cx2s Tooling for complete STDN information.



## 2.3.4 RIGHT ANGLE CORE DRILLS

**Table 2.3-4A  
CB Core Drills**

STDN	Model Number
4-0-N	CBKD-4-0-N-RA-.****
4-1-N	CBKD-4-1-N-RA-.****
4-2-N	CBKD-4-2-N-RA-.****
4-3-N	CBKD-4-3-N-RA-.****
4-4-N	CBKD-4-4-N-RA-.****
6-0-N	CBKD-6-0-N-RA-.****
6-1-N	CBKD-6-1-N-RA-.****
6-2-N	CBKD-6-2-N-RA-.****
6-3-N	CBKD-6-3-N-RA-.****
8-0-N	CBKD-8-0-N-RA-.****
8-1-N	CBKD-8-1-N-RA-.****

STDN	Model Number
8-2-N	CBKD-8-2-N-RA-.****
8-3-N	CBKD-8-3-N-RA-.****
10-0-N	CBKD-10-0-N-RA-.****
10-1-N	CBKD-10-1-N-RA-.****
10-2-N	CBKD-10-2-N-RA-.****
10-3-N	CBKD-10-3-N-RA-.****
12-0-N	CBKD-12-0-N-RA-.****
12-1-N	CBKD-12-1-N-RA-.****
12-2-N	CBKD-12-2-N-RA-.****
12-3-N	CBKD-12-3-N-RA-.****

**Table 2.3-4B  
CA Core Drills**


STDN	Model Number
20	CAKD-20-RA-.****
21	CAKD-21-RA-.****
22	CAKD-22-RA-.****
23	CAKD-23-RA-.****
30	CAKD-30-RA-.****
31	CAKD-31-RA-.****
32	CAKD-32-RA-.****
33	CAKD-33-RA-.****
40	CAKD-40-RA-.****
41	CAKD-41-RA-.****
42	CAKD-42-RA-.****
43	CAKD-43-RA-.****
50	CAKD-50-RA-.****
51	CAKD-51-RA-.****
52	CAKD-52-RA-.****
53	CAKD-53-RA-.****
60	CAKD-60-RA-.****
61	CAKD-61-RA-.****
62	CAKD-62-RA-.****
63	CAKD-63-RA-.****
70	CAKD-70-RA-.****

**Table 2.3-4C  
KB2 Core Drills**

STDN	Model Number
40-****-0	KB2KD-40-****-0-RA-.****
41-****-0	KB2KD-41-****-0-RA-.****
42-****-0	KB2KD-42-****-0-RA-.****
43-****-0	KB2KD-43-****-0-RA-.****
60-****-0	KB2KD-60-****-0-RA-.****
61-****-0	KB2KD-61-****-0-RA-.****
62-****-0	KB2KD-62-****-0-RA-.****
63-****-0	KB2KD-63-****-0-RA-.****
80-****-0	KB2KD-80-****-0-RA-.****
81-****-0	KB2KD-81-****-0-RA-.****
82-****-0	KB2KD-82-****-0-RA-.****
83-****-0	KB2KD-83-****-0-RA-.****
100-****-0	KB2KD-100-****-0-RA-.****
101-****-0	KB2KD-101-****-0-RA-.****
102-****-0	KB2KD-102-****-0-RA-.****
103-****-0	KB2KD-103-****-0-RA-.****
120-****-0	KB2KD-120-****-0-RA-.****
121-****-0	KB2KD-121-****-0-RA-.****
122-****-0	KB2KD-122-****-0-RA-.****
123-****-0	KB2KD-123-****-0-RA-.****


\*\*\*\* Refer to Cx2s Tooling for complete STDN information.

## 2.3.5 STARTING REAMERS

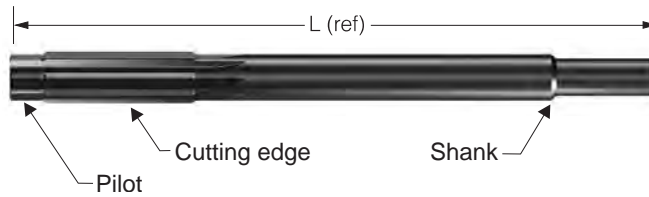

**Figure 2.3-5**  
**Starting Reamer**

- Designed principally for starting hole sizing where only a moderate amount of stock removal is required (typically .010 inch to .015 inch).
- Used to produce holes of superior dimensional accuracy and surface finish.
- Starting reamers feature a pilot which is sized to the drilled pilot hole.
- Identification is provided by an electroetched model number and two electroetched lines.
- High-Speed steel reamers are standard. Cobalt and carbide reamers are available for special applications.
- For other types or sizes, please contact our Sales Staff.

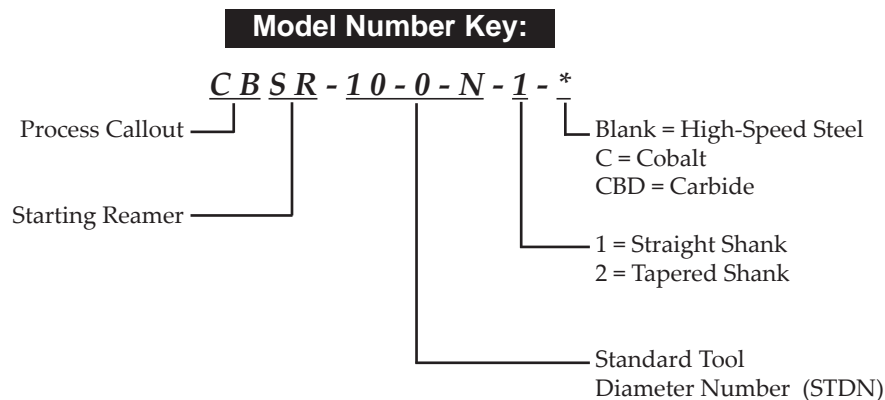

*Detailed Tooling*  
*Page 45*

- UNCONTROLLED IF PRINTED -

## 2.3.5 STARTING REAMERS

**Table 2.3-5A  
CB Starting Reamers**

STDN	Model Number	L (Ref. Fig. 2.3-5) (inch)	STDN	Model Number	L (Ref. Fig. 2.3-5) (inch)
4-0-N	CBSR-4-0-N-1	3.50	18-0-N	CBSR-18-0-N-1	8.00
4-1-N	CBSR-4-1-N-1	3.50	18-1-N	CBSR-18-1-N-1	8.00
4-2-N	CBSR-4-2-N-1	4.00	18-2-N	CBSR-18-2-N-1	8.00
4-3-N	CBSR-4-3-N-1	4.50	18-3-N	CBSR-18-3-N-1	8.00
4-4-N	CBSR-4-4-N-1	4.50	20-0-N	CBSR-20-0-N-1	9.00
6-0-N	CBSR-6-0-N-1	4.50	20-1-N	CBSR-20-1-N-1	9.00
6-1-N	CBSR-6-1-N-1	5.00	20-2-N	CBSR-20-2-N-1	9.00
6-2-N	CBSR-6-2-N-1	5.00	20-3-N	CBSR-20-3-N-1	9.00
6-3-N	CBSR-6-3-N-1	6.00	22-0-N	CBSR-22-0-N-1	9.00
8-0-N	CBSR-8-0-N-1	6.00	22-1-N	CBSR-22-1-N-1	9.00
8-1-N	CBSR-8-1-N-1	6.00	22-2-N	CBSR-22-2-N-1	9.00
8-2-N	CBSR-8-2-N-1	6.00	22-3-N	CBSR-22-3-N-1	9.00
8-3-N	CBSR-8-3-N-1	6.00	24-0-N	CBSR-24-0-N-1	9.00
10-0-N	CBSR-10-0-N-1	6.00	24-1-N	CBSR-24-1-N-1	9.50
10-1-N	CBSR-10-1-N-1	6.00	24-2-N	CBSR-24-2-N-1	9.50
10-2-N	CBSR-10-2-N-1	6.00	24-3-N	CBSR-24-3-N-1	9.50
10-3-N	CBSR-10-3-N-1	7.00	26-0-N	CBSR-26-0-N-1	9.50
12-0-N	CBSR-12-0-N-1	7.00	26-1-N	CBSR-26-1-N-1	9.50
12-1-N	CBSR-12-1-N-1	7.00	26-2-N	CBSR-26-2-N-1	9.50
12-2-N	CBSR-12-2-N-1	7.00	26-3-N	CBSR-26-3-N-1	9.50
12-3-N	CBSR-12-3-N-1	7.00	28-0-N	CBSR-28-0-N-1	10.00
14-0-N	CBSR-14-0-N-1	7.00	28-1-N	CBSR-28-1-N-1	10.00
14-1-N	CBSR-14-1-N-1	7.00	28-2-N	CBSR-28-2-N-1	10.00
14-2-N	CBSR-14-2-N-1	7.00	28-3-N	CBSR-28-3-N-1	10.00
14-3-N	CBSR-14-3-N-1	7.00	30-0-N	CBSR-30-0-N-1	10.00
16-0-N	CBSR-16-0-N-1	8.00	30-1-N	CBSR-30-1-N-1	10.00
16-1-N	CBSR-16-1-N-1	8.00	30-2-N	CBSR-30-2-N-1	10.00
16-2-N	CBSR-16-2-N-1	8.00	30-3-N	CBSR-30-3-N-1	10.00
16-3-N	CBSR-16-3-N-1	8.00			

**Table 2.3-5B  
CA Starting Reamers**

STDN	Model Number	L (Ref. Fig. 2.3-5) (inch)
20	CASR-20-1	3.50
21	CASR-21-1	3.50
22	CASR-22-1	4.00
23	CASR-23-1	4.00
30	CASR-30-1	4.50
31	CASR-31-1	4.50
32	CASR-32-1	5.00
33	CASR-33-1	5.00
40	CASR-40-1	6.00
41	CASR-41-1	6.00
42	CASR-42-1	6.00
43	CASR-43-1	6.00
50	CASR-50-1	6.00
51	CASR-51-1	6.00
52	CASR-52-1	6.00
53	CASR-53-1	6.00
60	CASR-60-1	7.00
61	CASR-61-1	7.00
62	CASR-62-1	7.00
63	CASR-63-1	7.00
70	CASR-70-1	7.00
71	CASR-71-1	7.00
72	CASR-72-1	7.00
73	CASR-73-1	7.00
80	CASR-80-1	8.00
81	CASR-81-1	8.00
82	CASR-82-1	8.00
83	CASR-83-1	8.00
90	CASR-90-1	8.00
91	CASR-91-1	8.00
92	CASR-92-1	8.00
93	CASR-93-1	8.00
100	CASR-100-1	8.00
101	CASR-101-1	9.00
102	CASR-102-1	9.00
103	CASR-103-1	9.00
110	CASR-110-1	9.00
111	CASR-111-1	9.00

**Table 2.3-5C  
KB2 Starting Reamers**

STDN	Model Number	L* (Ref. Fig. 2.3-5) (inch)
40-****-0	KB2SR-40-****-0-1	4.00
41-****-0	KB2SR-41-****-0-1	4.00
42-****-0	KB2SR-42-****-0-1	4.00
43-****-0	KB2SR-43-****-0-1	4.50
60-****-0	KB2SR-60-****-0-1	4.50
61-****-0	KB2SR-61-****-0-1	5.00
62-****-0	KB2SR-62-****-0-1	5.00
63-****-0	KB2SR-63-****-0-1	6.00
80-****-0	KB2SR-80-****-0-1	6.00
81-****-0	KB2SR-81-****-0-1	6.00
82-****-0	KB2SR-82-****-0-1	6.00
83-****-0	KB2SR-83-****-0-1	6.00
100-****-0	KB2SR-100-****-0-1	6.00
101-****-0	KB2SR-101-****-0-1	6.00
102-****-0	KB2SR-102-****-0-1	6.00
103-****-0	KB2SR-103-****-0-1	7.00
120-****-0	KB2SR-120-****-0-1	7.00
121-****-0	KB2SR-123-****-0-1	7.00
122-****-0	KB2SR-122-****-0-1	7.00
123-****-0	KB2SR-123-****-0-1	7.00

\* Lengths may vary depending on tooling type.  
\*\*\*\* Refer to Cx2s Tooling for STDN information.

**Table 2.3-5D  
CR Starting Reamers**


STDN	Model Number	L (Ref. Fig. 2.3-5) (inch)
R30	CRSR-R30-1	4.50
R32	CRSR-R32-1	5.00
R40	CRSR-R40-1	6.00
R42	CRSR-R42-1	6.00
R50	CRSR-R50-1	6.00
R52	CRSR-R52-1	6.00
R60	CRSR-R60-1	7.00
R62	CRSR-R62-1	7.00

**2.3.5  
STARTING  
REAMERS**

*Detailed Tooling  
Page 47*

- UNCONTROLLED IF PRINTED -


## 2.3.6 RIGHT ANGLE STARTING REAMERS

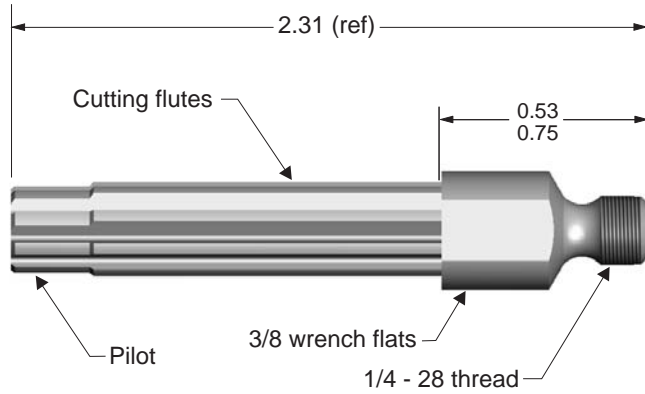

**Figure 2.3-6**  
**Right Angle Starting Reamer**

- Designed principally for sizing starting holes where only a moderate amount of stock removal is required (typically .010 inch to .015 inch).
- Used only in restricted front-side clearance applications.
- High-Speed steel reamers feature a pilot which is sized to the drilled pilot hole.
- High-Speed steel reamers are standard. Cobalt and carbide reamers are available for special applications.
- Identification is provided by an electroetched STDN and two lines ground or electroetched mark on wrench flat, indicating the second cutting tool operation.

### Model Number Key:

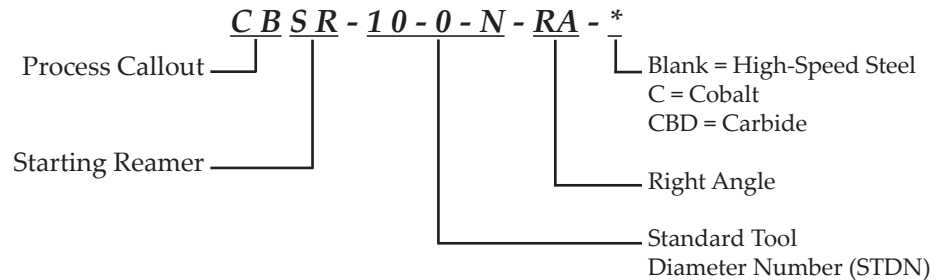

**Table 2.3-6A**  
**CB Starting Reamers**

STDN	Model Number
4-0-N	CBSR-4-0-N-RA
4-1-N	CBSR-4-1-N-RA
4-2-N	CBSR-4-2-N-RA
4-3-N	CBSR-4-3-N-RA
4-4-N	CBSR-4-4-N-RA
6-0-N	CBSR-6-0-N-RA
6-1-N	CBSR-6-1-N-RA
6-2-N	CBSR-6-2-N-RA
6-3-N	CBSR-6-3-N-RA
8-0-N	CBSR-8-0-N-RA
8-1-N	CBSR-8-1-N-RA
8-2-N	CBSR-8-2-N-RA
8-3-N	CBSR-8-3-N-RA
10-0-N	CBSR-10-0-N-RA
10-1-N	CBSR-10-1-N-RA
10-2-N	CBSR-10-2-N-RA
10-3-N	CBSR-10-3-N-RA
12-0-N	CBSR-12-0-N-RA
12-1-N	CBSR-12-1-N-RA
12-2-N	CBSR-12-2-N-RA
12-3-N	CBSR-12-3-N-RA

**Table 2.3-6B**  
**CA Starting Reamers**

STDN	Model Number
20	CASR-20-RA
21	CASR-21-RA
22	CASR-22-RA
23	CASR-23-RA
30	CASR-30-RA
31	CASR-31-RA
32	CASR-32-RA
33	CASR-33-RA
40	CASR-40-RA
41	CASR-41-RA
42	CASR-42-RA
43	CASR-43-RA
50	CASR-50-RA
51	CASR-51-RA
52	CASR-52-RA
53	CASR-53-RA
60	CASR-60-RA
61	CASR-61-RA
62	CASR-62-RA
63	CASR-63-RA
70	CASR-70-RA

**2.3.6**  
**RIGHT ANGLE**  
**STARTING**  
**REAMERS**

## 2.3.6 RIGHT ANGLE STARTING REAMERS

**Table 2.3-6C  
KB2 Starting Reamers**


STDN	Model Number
40-****-0	KB2SR-40-****-0-RA
41-****-0	KB2SR-41-****-0-RA
42-****-0	KB2SR-42-****-0-RA
43-****-0	KB2SR-43-****-0-RA
60-****-0	KB2SR-60-****-0-RA
61-****-0	KB2SR-61-****-0-RA
62-****-0	KB2SR-62-****-0-RA
63-****-0	KB2SR-63-****-0-RA
80-****-0	KB2SR-80-****-0-RA
81-****-0	KB2SR-81-****-0-RA
82-****-0	KB2SR-82-****-0-RA
83-****-0	KB2SR-83-****-0-RA
100-****-0	KB2SR-100-****-0-RA
101-****-0	KB2SR-101-****-0-RA
102-****-0	KB2SR-102-****-0-RA
103-****-0	KB2SR-103-****-0-RA
120-****-0	KB2SR-120-****-0-RA
121-****-0	KB2SR-121-****-0-RA
122-****-0	KB2SR-122-****-0-RA
123-****-0	KB2SR-123-****-0-RA

**Table 2.3-6D  
CR Starting Reamers**

STDN	Model Number
R30	CRSR-30-RA
R32	CRSR-32-RA
R40	CRSR-40-RA
R42	CRSR-42-RA
R50	CRSR-50-RA
R52	CRSR-52-RA
R60	CRSR-60-RA
R62	CRSR-62-RA


\*\*\* Refer to Cx2s Tooling for STDN information.

## 2.3.7 GAGE FINISH REAMERS

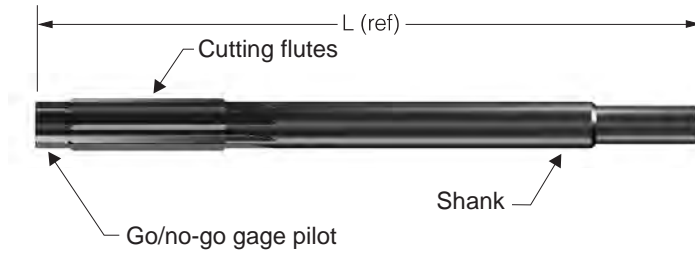

**Figure 2.3-7  
Gage Finish Reamer**

- Designed principally for hole sizing after cold expansion where only a moderate amount of stock removal is required (typically .010 inch to .015 inch).
- All gage finish reamers feature a non-cutting pilot that is sized to the cold expansion verification pin diameter, which verifies the hole has been cold expanded (see combination gage section). The pilot will not fit into a non-cold expanded hole.
- Identification provided by an electroetched model number and three electroetched lines.
- High-Speed steel reamers are standard. Cobalt and carbide reamers are available for special applications.
- When possible, final hole diameter should be a multiple of .0005 inch.
- Final reamers are sized to the minimum final hole diameter unless otherwise specified.
- For other sizes, please contact our Sales Staff.

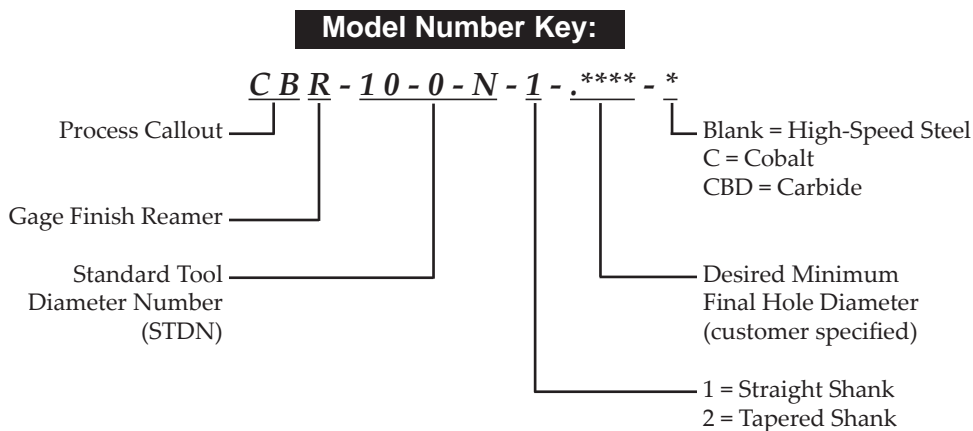

## 2.3.7 GAGE FINISH REAMERS

**Table 2.3-7A  
CB Finish Reamers**

STDN	Model Number	L* (Ref. Fig. 2.3-7) (inch)
4-0-N	CBR-4-0-N-1-.****	3.50
4-1-N	CBR-4-1-N-1-.****	3.50
4-2-N	CBR-4-2-N-1-.****	4.00
4-3-N	CBR-4-3-N-1-.****	4.50
4-4-N	CBR-4-4-N-1-.****	4.50
6-0-N	CBR-6-0-N-1-.****	4.50
6-1-N	CBR-6-1-N-1-.****	5.00
6-2-N	CBR-6-2-N-1-.****	5.00
6-3-N	CBR-6-3-N-1-.****	6.00
8-0-N	CBR-8-0-N-1-.****	6.00
8-1-N	CBR-8-1-N-1-.****	6.00
8-2-N	CBR-8-2-N-1-.****	6.00
8-3-N	CBR-8-3-N-1-.****	6.00
10-0-N	CBR-10-0-N-1-.****	6.00
10-1-N	CBR-10-1-N-1-.****	6.00
10-2-N	CBR-10-2-N-1-.****	6.00
10-3-N	CBR-10-3-N-1-.****	7.00
12-0-N	CBR-12-0-N-1-.****	7.00
12-1-N	CBR-12-1-N-1-.****	7.00
12-2-N	CBR-12-2-N-1-.****	7.00
12-3-N	CBR-12-3-N-1-.****	7.00
14-0-N	CBR-14-0-N-1-.****	7.00
14-1-N	CBR-14-1-N-1-.****	7.00
14-2-N	CBR-14-2-N-1-.****	7.00
14-3-N	CBR-14-3-N-1-.****	8.00
16-0-N	CBR-16-0-N-1-.****	8.00
16-1-N	CBR-16-1-N-1-.****	8.00
16-2-N	CBR-16-2-N-1-.****	8.00
16-3-N	CBR-16-3-N-1-.****	8.00

STDN	Model Number	L* (Ref. Fig. 2.3-7) (inch)
18-0-N	CBR-18-0-N-1-.****	8.00
18-1-N	CBR-18-1-N-1-.****	8.00
18-2-N	CBR-18-2-N-1-.****	8.00
18-3-N	CBR-18-3-N-1-.****	9.00
20-0-N	CBR-20-0-N-1-.****	9.00
20-1-N	CBR-20-1-N-1-.****	9.00
20-2-N	CBR-20-2-N-1-.****	9.00
20-3-N	CBR-20-3-N-1-.****	9.00
22-0-N	CBR-22-0-N-1-.****	9.00
22-1-N	CBR-22-1-N-1-.****	9.00
22-2-N	CBR-22-2-N-1-.****	9.00
22-3-N	CBR-22-3-N-1-.****	9.50
24-0-N	CBR-24-0-N-1-.****	9.50
24-1-N	CBR-24-1-N-1-.****	9.50
24-2-N	CBR-24-2-N-1-.****	9.50
24-3-N	CBR-24-3-N-1-.****	9.50
26-0-N	CBR-26-0-N-1-.****	9.50
26-1-N	CBR-26-1-N-1-.****	9.50
26-2-N	CBR-26-2-N-1-.****	9.50
26-3-N	CBR-26-3-N-1-.****	10.00
28-0-N	CBR-28-0-N-1-.****	10.00
28-1-N	CBR-28-1-N-1-.****	10.00
28-2-N	CBR-28-2-N-1-.****	10.00
28-3-N	CBR-28-3-N-1-.****	10.00
30-0-N	CBR-30-0-N-1-.****	10.00
30-1-N	CBR-30-1-N-1-.****	10.00
30-2-N	CBR-30-2-N-1-.****	10.00
30-3-N	CBR-30-3-N-1-.****	10.50

\*Actual length may vary depending on final hole size.  
\*\*\*\* Cutting diameter.

**Table 2.3-7B  
CA Finish Reamers**

STDN	Model Number	L* (Ref. Fig. 2.3-7) (inch)
20	CAR-20-1-.****	3.50
21	CAR-21-1-.****	3.50
22	CAR-22-1-.****	4.00
23	CAR-23-1-.****	4.00
30	CAR-30-1-.****	4.50
31	CAR-31-1-.****	4.50
32	CAR-32-1-.****	5.00
33	CAR-33-1-.****	6.00
40	CAR-40-1-.****	6.00
41	CAR-41-1-.****	6.00
42	CAR-42-1-.****	6.00
43	CAR-43-1-.****	6.00
50	CAR-50-1-.****	6.00
51	CAR-51-1-.****	6.00
52	CAR-52-1-.****	6.00
53	CAR-53-1-.****	6.00
60	CAR-60-1-.****	7.00
61	CAR-61-1-.****	7.00
62	CAR-62-1-.****	7.00
63	CAR-63-1-.****	7.00
70	CAR-70-1-.****	7.00
71	CAR-71-1-.****	7.00
72	CAR-72-1-.****	7.00
73	CAR-73-1-.****	7.00
80	CAR-80-1-.****	8.00
81	CAR-81-1-.****	8.00
82	CAR-82-1-.****	8.00
83	CAR-83-1-.****	8.00
90	CAR-90-1-.****	8.00
91	CAR-91-1-.****	8.00
92	CAR-92-1-.****	8.00
93	CAR-93-1-.****	8.00
100	CAR-100-1-.****	9.00
101	CAR-101-1-.****	9.00
102	CAR-102-.****	9.00
103	CAR-103-1-.****	9.00
110	CAR-110-1-.****	9.00
111	CAR-111-1-.****	9.00

**Table 2.3-7C  
CR Finish Reamers**

STDN	Model Number	L* (Ref. Fig. 2.3-7) (inch)
R30	CRR-R30-1-.****	4.50
R32	CRR-R32-1-.****	5.00
R40	CRR-R40-1-.****	6.00
R42	CRR-R42-1-.****	6.00
R50	CRR-R50-1-.****	6.00
R52	CRR-R52-1-.****	6.00
R60	CRR-R60-1-.****	6.00
R62	CRR-R62-1-.****	7.00

\*Actual length may vary depending on the final hole size.


## 2.3.7 GAGE FINISH REAMERS

\*Actual length may vary depending on the final hole size.

- UNCONTROLLED IF PRINTED -


Detailed Tooling  
Page 53

## 2.3.8 RIGHT ANGLE GAGE FINISH REAMERS

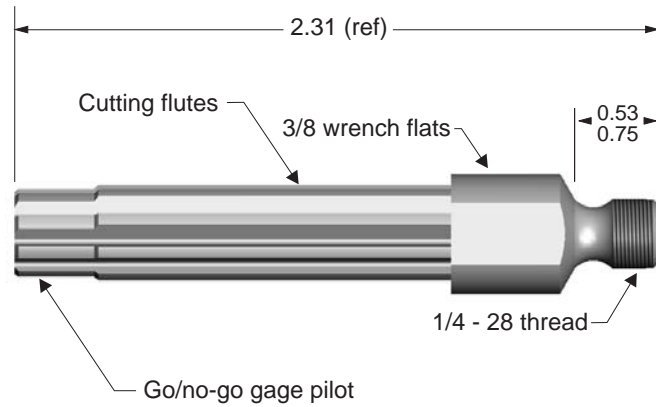

**Figure 2.3-8**  
**Right Angle Gage Finish Reamer**

- Designed principally for hole sizing after cold expansion where only a moderate amount of stock removal is required (typically .010 inch to .015 inch).
- Used in restricted front-side clearance applications.
- All gage finish reamers feature a non-cutting pilot sized to the cold expansion verification pin diameter to verify the hole has been cold expanded (see verification gage section). The pilot will not fit into a non-cold expanded hole.
- High-Speed steel reamers are standard. Cobalt and carbide reamers are available for special applications.
- When possible, final hole diameter should be a multiple of .0005 inch.
- Identification is provided by an electroetched STDN and three lines ground or electroetched mark on wrench flat.

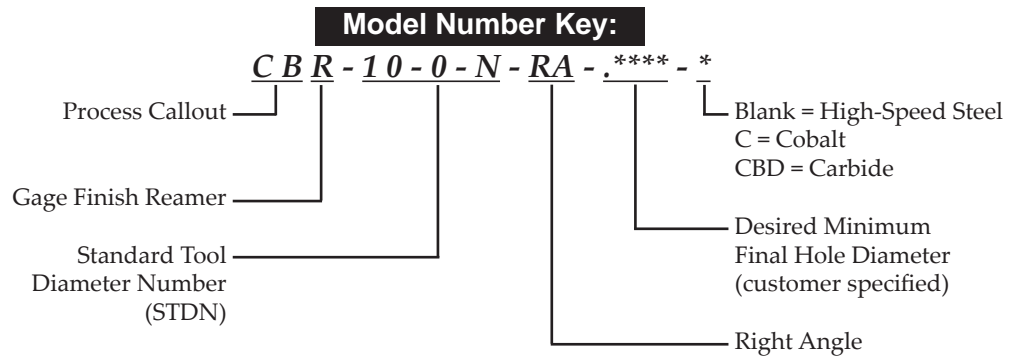

**Table 2.3-8A  
CB Finish Reamers**

STDN	Model Number
4-0-N	CBR-4-0-N-RA-.****
4-1-N	CBR-4-1-N-RA-.****
4-2-N	CBR-4-2-N-RA-.****
4-3-N	CBR-4-3-N-RA-.****
4-4-N	CBR-4-4-N-RA-.****
6-0-N	CBR-6-0-N-RA-.****
6-1-N	CBR-6-1-N-RA-.****
6-2-N	CBR-6-2-N-RA-.****
6-3-N	CBR-6-3-N-RA-.****
8-0-N	CBR-8-0-N-RA-.****
8-1-N	CBR-8-1-N-RA-.****
8-2-N	CBR-8-2-N-RA-.****
8-3-N	CBR-8-3-N-RA-.****
10-0-N	CBR-10-0-N-RA-.****
10-1-N	CBR-10-1-N-RA-.****
10-2-N	CBR-10-2-N-RA-.****
10-3-N	CBR-10-3-N-RA-.****
12-0-N	CBR-12-0-N-RA-.****
12-1-N	CBR-12-1-N-RA-.****
12-2-N	CBR-12-2-N-RA-.****
12-3-N	CBR-12-3-N-RA-.****

**Table 2.3-8B  
CA Finish Reamers**

STDN	Model Number
20	CAR-20-RA-.****
21	CAR-21-RA-.****
22	CAR-22-RA-.****
23	CAR-23-RA-.****
30	CAR-30-RA-.****
31	CAR-31-RA-.****
32	CAR-32-RA-.****
33	CAR-33-RA-.****
40	CAR-40-RA-.****
41	CAR-41-RA-.****
42	CAR-42-RA-.****
43	CAR-43-RA-.****
50	CAR-50-RA-.****
51	CAR-51-RA-.****
52	CAR-52-RA-.****
53	CAR-53-RA-.****
60	CAR-60-RA-.****
61	CAR-61-RA-.****
62	CAR-62-RA-.****
63	CAR-63-RA-.****
70	CAR-70-RA-.****


\*\*\*\* Cutting diameter.

**Table 2.3-8C  
CR Finish Reamers**

STDN	Model Number
R30	CRR-30-RA-.****
R32	CRR-32-RA-.****
R40	CRR-40-RA-.****
R42	CRR-42-RA-.****
R50	CRR-50-RA-.****
R52	CRR-52-RA-.****
R60	CRR-60-RA-.****
R62	CRR-62-RA-.****

**2.3.8  
RIGHT ANGLE  
GAGE FINISH  
REAMERS**

## 2.3.9 COMBINATION GAGES

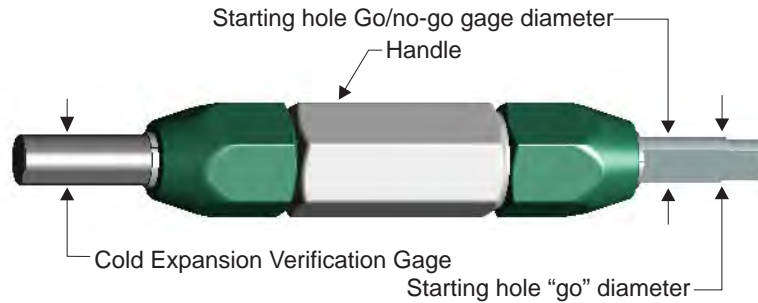


**Figure 2.3-9A  
Combination Gage**



**Figure 2.3-9B  
Right Angle Combination Gage**

- A stepped go/no-go configuration pin allows one end to ensure starting hole is within the specification tolerance prior to cold expansion.
- The cold expansion verification end confirms the hole has been cold expanded prior to final reaming.
- Starting hole diameter gage pin is a blade configuration to detect hole ovality.
- Cold expansion verification pin has flats to allow clearance past sleeve ridge.
- Identification is provided by a stamped model number on the handle and electroetched diameters on the pins.
- Made of long wearing, hardened steel pins with an aluminum handle.
- For other sizes, please contact our Sales Staff.

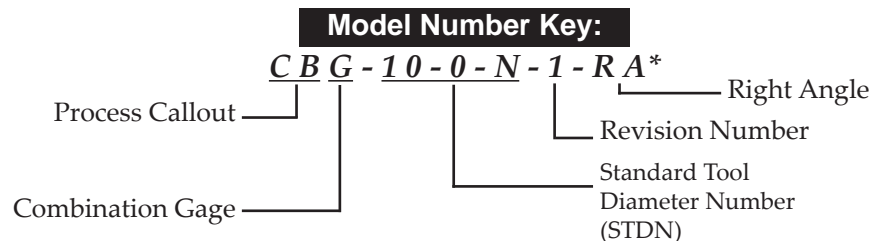

\* Some legacy Right Angle Combination Gages have a -RA1 at the end of the model number.

**Table 2.3-9A  
CB Combo Gages**

STDN	Model Number
4-0-N	CBG-4-0-N-1
4-1-N	CBG-4-1-N-1
4-2-N	CBG-4-2-N-1
4-3-N	CBG-4-3-N-1
4-4-N	CBG-4-4-N-1
6-0-N	CBG-6-0-N-1
6-1-N	CBG-6-1-N-1
6-2-N	CBG-6-2-N-1
6-3-N	CBG-6-3-N-1
8-0-N	CBG-8-0-N-1
8-1-N	CBG-8-1-N-1
8-2-N	CBG-8-2-N-1
8-3-N	CBG-8-3-N-1
10-0-N	CBG-10-0-N-1
10-1-N	CBG-10-1-N-1
10-2-N	CBG-10-2-N-1
10-3-N	CBG-10-3-N-1
12-0-N	CBG-12-0-N-1
12-1-N	CBG-12-1-N-1
12-2-N	CBG-12-2-N-1
12-3-N	CBG-12-3-N-1
14-0-N	CBG-14-0-N-1
14-1-N	CBG-14-1-N-1
14-2-N	CBG-14-2-N-1
14-3-N	CBG-14-3-N-1
16-0-N	CBG-16-0-N-1
16-1-N	CBG-16-1-N-1
16-2-N	CBG-16-2-N-1
16-3-N	CBG-16-3-N-1

**Table 2.3-9B  
CA Combo Gages**

STDN	Model Number
18-0-N	CBG-18-0-N-1
18-1-N	CBG-18-1-N-1
18-2-N	CBG-18-2-N-1
18-3-N	CBG-18-3-N-1
20-0-N	CBG-20-0-N-1
20-1-N	CBG-20-1-N-1
20-2-N	CBG-20-2-N-1
20-3-N	CBG-20-3-N-1
22-0-N	CBG-22-0-N-1
22-1-N	CBG-22-1-N-1
22-2-N	CBG-22-2-N-1
22-3-N	CBG-22-3-N-1
24-0-N	CBG-24-0-N-1
24-1-N	CBG-24-1-N-1
24-2-N	CBG-24-2-N-1
24-3-N	CBG-24-3-N-1
26-0-N	CBG-26-0-N-1
26-1-N	CBG-26-1-N-1
26-2-N	CBG-26-2-N-1
26-3-N	CBG-26-3-N-1
28-0-N	CBG-28-0-N-1
28-1-N	CBG-28-1-N-1
28-2-N	CBG-28-2-N-1
28-3-N	CBG-28-3-N-1
30-0-N	CBG-30-0-N-1
30-1-N	CBG-30-1-N-1
30-2-N	CBG-30-2-N-1
30-3-N	CBG-30-3-N-1
20	CAG-20
21	CAG-21
22	CAG-22
23	CAG-23
30	CAG-30
31	CAG-31
32	CAG-32
33	CAG-33
40	CAG-40
41	CAG-41
42	CAG-42
43	CAG-43
50	CAG-50
51	CAG-51
52	CAG-52
53	CAG-53
60	CAG-60
61	CAG-61
62	CAG-62
63	CAG-63
70	CAG-70
71	CAG-71
72	CAG-72
73	CAG-73
80	CAG-80
81	CAG-81
82	CAG-82
83	CAG-83
90	CAG-90
91	CAG-91
92	CAG-92
93	CAG-93
100	CAG-100
101	CAG-101
102	CAG-102
103	CAG-103
110	CAG-110
111	CAG-111

**2.3.9  
COMBINATION  
GAGES**

*Detailed Tooling  
Page 57*

- UNCONTROLLED IF PRINTED -

## 2.3.9 COMBINATION GAGES

**Table 2.3-9C  
KB2 Combo Gages**


STDN	Model Number
40-****-0	KB2G-40-****-0
41-****-0	KB2G-40-****-0
42-****-0	KB2G-40-****-0
43-****-0	KB2G-40-****-0
60-****-0	KB2G-60-****-0
61-****-0	KB2G-61-****-0
62-****-0	KB2G-62-****-0
63-****-0	KB2G-63-****-0
80-****-0	KB2G-80-****-0
81-****-0	KB2G-81-****-0
82-****-0	KB2G-82-****-0
83-****-0	KB2G-83-****-0
100-****-0	KB2G-100-****-0
101-****-0	KB2G-101-****-0
102-****-0	KB2G-102-****-0
103-****-0	KB2G-103-****-0
120-****-0	KB2G-120-****-0
121-****-0	KB2G-121-****-0
122-****-0	KB2G-122-****-0
123-****-0	KB2G-123-****-0

\*\*\*\* Refer to Cx2s Tooling for complete STDN information.

**Table 2.3-9D  
CR Combo Gages**


STDN	Model Number
R30	CRG-30
R32	CRG-32
R40	CRG-40
R42	CRG-42
R50	CRG-50
R52	CRG-52
R60	CRG-60
R62	CRG-62

## 2.3.10 MANDREL GAGES

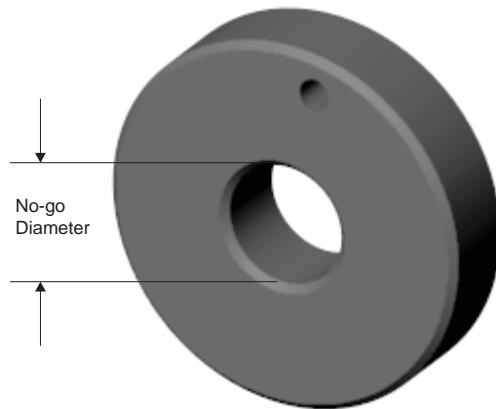

**Figure 2.3-10  
Mandrel Gage**

- No-go feature indicates that the mandrel is within the specification tolerance.
- Identification is provided by a machined model number on the front of the mandrel gage.
- Made from hardened steel.
- Sized to the minimum allowable major diameter of the mandrel.

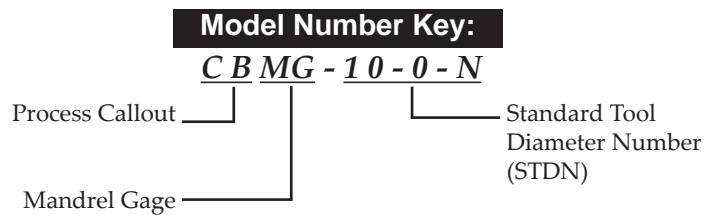

## 2.3.10 MANDREL GAGES

**Table 2.3-10A  
CB Mandrel Gages**

STDN	Model Number	STDN	Model Number
4-0-N	CBMG-4-0-N	18-0-N	CBMG-18-0-N
4-1-N	CBMG-4-1-N	18-1-N	CBMG-18-1-N
4-2-N	CBMG-4-2-N	18-2-N	CBMG-18-2-N
4-3-N	CBMG-4-3-N	18-3-N	CBMG-18-3-N
4-4-N	CBMG-4-4-N	20-0-N	CBMG-20-0-N
6-0-N	CBMG-6-0-N	20-1-N	CBMG-20-1-N
6-1-N	CBMG-6-1-N	20-2-N	CBMG-20-2-N
6-2-N	CBMG-6-2-N	20-3-N	CBMG-20-3-N
6-3-N	CBMG-6-3-N	22-0-N	CBMG-22-0-N
8-0-N	CBMG-8-0-N	22-1-N	CBMG-22-1-N
8-1-N	CBMG-8-1-N	22-2-N	CBMG-22-2-N
8-2-N	CBMG-8-2-N	22-3-N	CBMG-22-3-N
8-3-N	CBMG-8-3-N	24-0-N	CBMG-24-0-N
10-0-N	CBMG-10-0-N	24-1-N	CBMG-24-1-N
10-1-N	CBMG-10-1-N	24-2-N	CBMG-24-2-N
10-2-N	CBMG-10-2-N	24-3-N	CBMG-24-3-N
10-3-N	CBMG-10-3-N	26-0-N	CBMG-26-0-N
12-0-N	CBMG-12-0-N	26-1-N	CBMG-26-1-N
12-1-N	CBMG-12-1-N	26-2-N	CBMG-26-2-N
12-2-N	CBMG-12-2-N	26-3-N	CBMG-26-3-N
12-3-N	CBMG-12-3-N	28-0-N	CBMG-28-0-N
14-0-N	CBMG-14-0-N	28-1-N	CBMG-28-1-N
14-1-N	CBMG-14-1-N	28-2-N	CBMG-28-2-N
14-2-N	CBMG-14-2-N	28-3-N	CBMG-28-3-N
14-3-N	CBMG-14-3-N	30-0-N	CBMG-30-0-N
16-0-N	CBMG-16-0-N	30-1-N	CBMG-30-1-N
16-1-N	CBMG-16-1-N	30-2-N	CBMG-30-2-N
16-2-N	CBMG-16-2-N	30-3-N	CBMG-30-3-N
16-3-N	CBMG-16-3-N		

**Table 2.3-10B  
CA Mandrel Gages**

STDN	Model Number
20	CAMG-20
21	CAMG-21
22	CAMG-22
23	CAMG-23
30	CAMG-30
31	CAMG-31
32	CAMG-32
33	CAMG-33
40	CAMG-40
41	CAMG-41
42	CAMG-42
43	CAMG-43
50	CAMG-50
51	CAMG-51
52	CAMG-52
53	CAMG-53
60	CAMG-60
61	CAMG-61
62	CAMG-62
63	CAMG-63
70	CAMG-70
71	CAMG-71
72	CAMG-72
73	CAMG-73
80	CAMG-80
81	CAMG-81
82	CAMG-82
83	CAMG-83
90	CAMG-90
91	CAMG-91
92	CAMG-92
93	CAMG-93
100	CAMG-100
101	CAMG-101
102	CAMG-102
103	CAMG-103
110	CAMG-110
111	CAMG-111

Detailed Tooling  
Page 60

- UNCONTROLLED IF PRINTED -

**Table 2.3-10C  
KB2 Mandrel Gages**

STDN	Model Number
40-****-0	KB2MG-40-****-0
41-****-0	KB2MG-41-****-0
42-****-0	KB2MG-42-****-0
43-****-0	KB2MG-43-****-0
60-****-0	KB2MG-60-****-0
61-****-0	KB2MG-61-****-0
62-****-0	KB2MG-62-****-0
63-****-0	KB2MG-63-****-0
80-****-0	KB2MG-80-****-0
81-****-0	KB2MG-81-****-0
82-****-0	KB2MG-82-****-0
83-****-0	KB2MG-83-****-0
100-****-0	KB2MG-100-****-0
101-****-0	KB2MG-101-****-0
102-****-0	KB2MG-102-****-0
103-****-0	KB2MG-103-****-0
120-****-0	KB2MG-120-****-0
121-****-0	KB2MG-121-****-0
122-****-0	KB2MG-122-****-0
123-****-0	KB2MG-123-****-0


\*\*\*\* Refer to Cx2s Tooling for complete STDN information.

**Table 2.3-10D  
CR Mandrel Gages**

STDN	Model Number
R30	CRMG-R30
R32	CRMG-R32
R40	CRMG-R40
R42	CRMG-R42
R50	CRMG-R50
R52	CRMG-R52
R60	CRMG-R60
R62	CRMG-R62


**2.3.10  
MANDREL  
GAGES**

## 2.3.11 FINAL HOLE GAGES

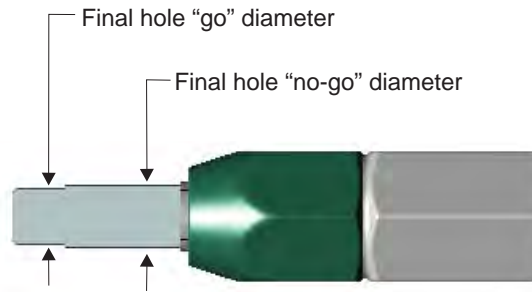

**Figure 2.3-11  
Final Hole Gage**

- Designed with a go/no-go feature to verify that the final hole has been properly reamed.
- Final hole gages are made from a hardened steel pin and an aluminum handle.
- Identification is provided by a stamped model number on the handle and electroetched final hole diameters on the pin.
- For other sizes and tool systems, contact our Sales Staff.

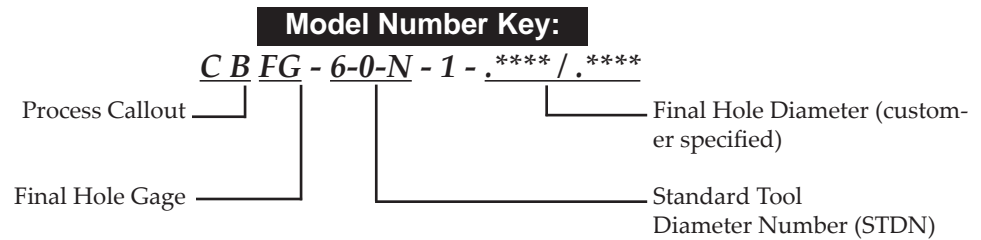


## 2.3.12 STAMP GAGES



**Figure 2.3-12  
Stamp Gage**

- Used to identify discrepant starting hole diameters, and to verify and mark holes that have been cold expanded.
- A stepped go/no-go configuration allows one end to ensure starting hole is within the specification tolerance prior to cold expansion, and stamps the part with "SHD" and an arrow to identify the hole if oversized.
- The opposite end verifies the hole has been properly cold expanded prior to final reaming and stamps the part CXD with an arrow pointing toward the cold expanded hole.
- The pin configuration is flat to detect hole ovality.
- Identification is provided by a stamped model number on the handle and electroetched diameters on the pins.
- Stamp gages are made of long wearing, hardened steel pins with an aluminum handle.
- Supplied with felt stamp pad, ink not included.
- For other sizes or series of tooling, please contact our Technical Sales staff.

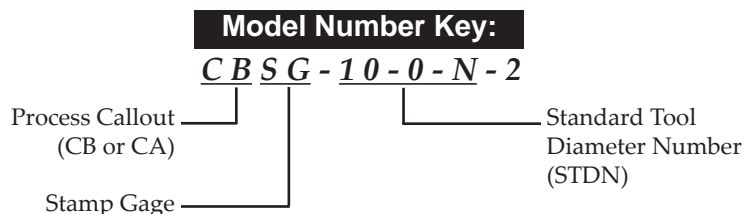

## 2.3.12 STAMP GAGES

**Table 2.3-12A  
CB Stamp Gages**


STDN	Model Number	STDN	Model Number
4-0-N	CBSG-4-0-N-2	18-0-N	CBSG-18-0-N-2
4-1-N	CBSG-4-1-N-2	18-1-N	CBSG-18-1-N-2
4-2-N	CBSG-4-2-N-2	18-2-N	CBSG-18-2-N-2
4-3-N	CBSG-4-3-N-2	18-3-N	CBSG-18-3-N-2
4-4-N	CBSG-4-4-N-2	20-0-N	CBSG-20-0-N-2
6-0-N	CBSG-6-0-N-2	20-1-N	CBSG-20-1-N-2
6-1-N	CBSG-6-1-N-2	20-2-N	CBSG-20-2-N-2
6-2-N	CBSG-6-2-N-2	20-3-N	CBSG-20-3-N-2
6-3-N	CBSG-6-3-N-2	22-0-N	CBSG-22-0-N-2
8-0-N	CBSG-8-0-N-2	22-1-N	CBSG-22-1-N-2
8-1-N	CBSG-8-1-N-2	22-2-N	CBSG-22-2-N-2
8-2-N	CBSG-8-2-N-2	22-3-N	CBSG-22-3-N-2
8-3-N	CBSG-8-3-N-2	24-0-N	CBSG-24-0-N-2
10-0-N	CBSG-10-0-N-2	24-1-N	CBSG-24-1-N-2
10-1-N	CBSG-10-1-N-2	24-2-N	CBSG-24-2-N-2
10-2-N	CBSG-10-2-N-2	24-3-N	CBSG-24-3-N-2
10-3-N	CBSG-10-3-N-2	26-0-N	CBSG-26-0-N-2
12-0-N	CBSG-12-0-N-2	26-1-N	CBSG-26-1-N-2
12-1-N	CBSG-12-1-N-2	26-2-N	CBSG-26-2-N-2
12-2-N	CBSG-12-2-N-2	26-3-N	CBSG-26-3-N-2
12-3-N	CBSG-12-3-N-2	28-0-N	CBSG-28-0-N-2
14-0-N	CBSG-14-0-N-2	28-1-N	CBSG-28-1-N-2
14-1-N	CBSG-14-1-N-2	28-2-N	CBSG-28-2-N-2
14-2-N	CBSG-14-2-N-2	28-3-N	CBSG-28-3-N-2
14-3-N	CBSG-14-3-N-2	30-0-N	CBSG-30-0-N-2
16-0-N	CBSG-16-0-N-2	30-1-N	CBSG-30-1-N-2
16-1-N	CBSG-16-1-N-2	30-2-N	CBSG-30-2-N-2
16-2-N	CBSG-16-2-N-2	30-3-N	CBSG-30-3-N-2
16-3-N	CBSG-16-3-N-2		

**Table 2.3-12B  
CA Stamp Gages**

STDN	Model Number
20	CASG-20-2
21	CASG-21-2
22	CASG-22-2
23	CASG-23-2
30	CASG-30-2
31	CASG-31-2
32	CASG-32-2
33	CASG-33-2
40	CASG-40-2
41	CASG-41-2
42	CASG-42-2
43	CASG-43-2
50	CASG-50-2
51	CASG-51-2
52	CASG-52-2
53	CASG-53-2
60	CASG-60-2
61	CASG-61-2
62	CASG-62-2
63	CASG-63-2
70	CASG-70-2
71	CASG-71-2
72	CASG-72-2
73	CASG-73-2
80	CASG-80-2
81	CASG-81-2
82	CASG-82-2
83	CASG-83-2
90	CASG-90-2
91	CASG-91-2
92	CASG-92-2
93	CASG-93-2
100	CASG-100-2
101	CASG-101-2
102	CASG-102-2
103	CASG-103-2
110	CASG-110-2
111	CASG-111-2

## 2.3.13 MANDRELS


- Used with a split sleeve to cold expand a hole.
- Identification is provided by an electroetched model number on the shank of the mandrel. (refer to B on Figure 2.3-13).
- Manufactured from high-strength, high-toughness alloy tool steel.
- Finished to a close diametrical tolerance of +/- .0002 inch or tighter.
- Typically endures 1,000 to 5,000 applications before the major diameter becomes worn beyond limits (depends on material being cold worked).
- -V2 denotes increased material strength for use with titanium or high strength steel applications.

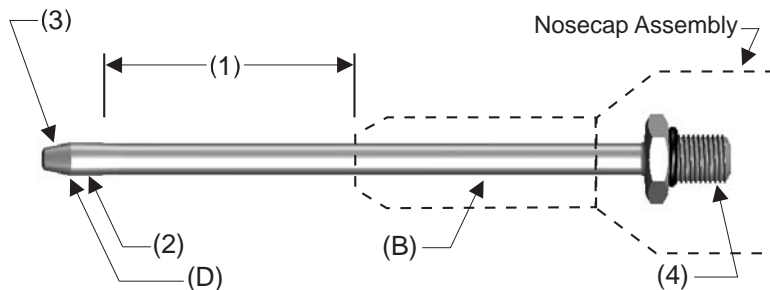

**Figure 2.3-13**  
**Parts of the Mandrel**

- The major diameter (D) in conjunction with the thickness of the split sleeve provides the radial expansion required by the Cold Expansion System. This dimension is specified by the appropriate process.
- The minor diameter (B) is sized so that when the appropriate sleeve is placed on the mandrel, it will fit into the correct starting hole.
- The stackup length (1) is the maximum material stackup that can be cold expanded with the mandrel.
- The back taper (2) is controlled to provide the optimal pull force.
- The front taper (3) aids in loading the sleeve onto the mandrel and facilitates insertion of the mandrel into the hole. A single witness mark ground in the front taper denotes the V2 configuration.
- The attachment (4) is the means by which the mandrel is attached to the puller unit. A hex nut is provided for finger tightening of the mandrel attachment, while the O-ring provides an air seal and friction to lock the mandrel in the puller unit.

## 2.3.14 LITTLE BRUTE MANDRELS

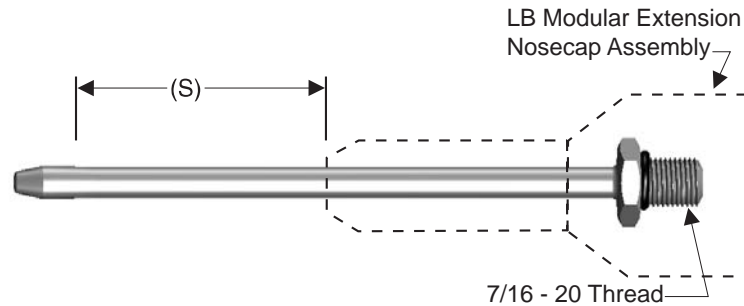


**Figure 2.3-14**  
**Little Brute Mandrel**

**Table 2.3-14A**  
**Stackup Callout**

With 2-inch Extension Nosecap S (Ref. Fig. 2.3-14) (inch)	With Flush Nosecap S (Ref. Fig. 2.3-14) (inch)	With CsCx Nosecap S (Ref. Fig. 2.3-14) (inch)	Mandrel Stackup Callout
----	0.5	----	5
----	1.0	----	10
----	1.5	----	15
----	2.0	----	20
0.5	2.5	----	25
<b>1.0</b>	3.0	1.3	<b>30</b>
1.5	3.5	1.8	35
<b>2.0</b>	----	2.3	<b>40</b>
2.5	----	2.8	45
3.0	----	3.3	50
3.5	----	----	55

Other lengths can be provided; please contact our Technical Sales Staff for more information.

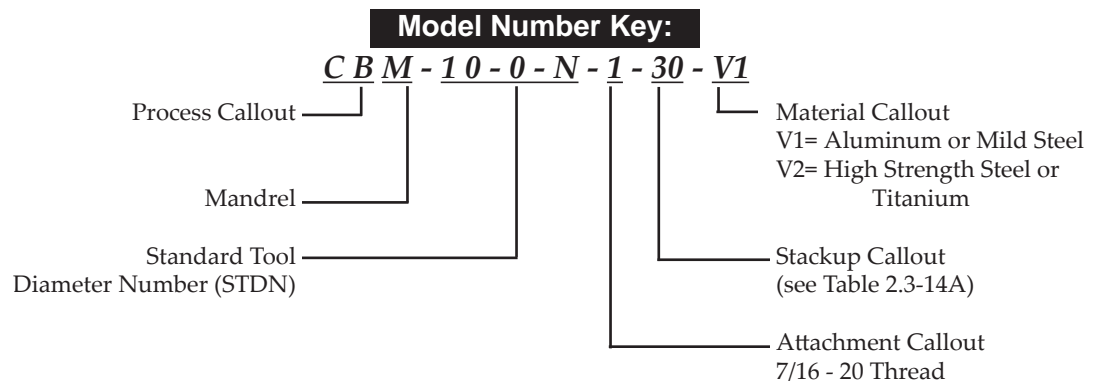

**Table 2.3-14B  
CR Mandrels**

STDN	Restricted Access Mandrel	Standard Mandrel
R30	CRM-R30-1-10-V1	KRM-R30-1-35-V1
R32	CRM-R32-1-10-V1	KRM-R32-1-35-V1
R40	CRM-R40-1-20-V1	KRM-R40-1-35-V1
R42	CRM-R42-1-20-V1	KRM-R42-1-35-V1
R50	CRM-R50-1-20-V1	KRM-R50-1-35-V1
R52	CRM-R52-1-20-V1	KRM-R52-1-35-V1
R60	CRM-R60-1-20-V1	KRM-R60-1-35-V1
R62	CRM-R62-1-20-V1	KRM-R62-1-35-V1


**Table 2.3-14C  
STDN Range**

Mandrel Prefix	Allowable STDN Range
CBM	4-0-N to 16-3-N
CAM	20 to 53
KBM	4-4-N to 12-3-N
KB2M	40-****-0 to 123-****-0
BLM	3 to 805
FTM	3-0-1 to 8-1-3

\*\*\*\* Refer to Cx2s Tooling for complete STDN information.

**2.3.14  
LITTLE BRUTE  
MANDRELS**

## 2.3.15 MEDIUM BRUTE MANDRELS

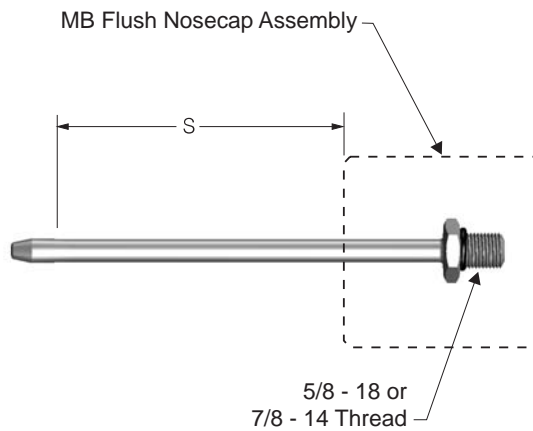

**Figure 2.3-15**  
**Medium Brute Mandrel**

**Table 2.3-15A**  
**Stackup Callout**


With Flush Nosecap (Ref. Fig. 2.3-15) (inch)	With 3-inch Extension Nosecap (inch)	Mandrel Stackup Callout
0.5	----	5
1.0	----	10
1.5	----	15
2.0	----	20
2.5	----	25
3.0	----	30
3.5	.05	35
4.0	1.0	40
4.5	1.5	45
5.0	2.0	50
5.5	2.5	55
<b>6.0</b>	<b>3.0</b>	<b>60</b>
6.5	3.5	65
7.0	4.0	70

Other lengths can be provided; please contact our Customer Service Department for more information.

**Table 2.3-15B**  
**Attachment Callout**

Mandrel Prefix	Allowable STDN Range	Thread Size	Attachment Callout
CBM	10-3-N to 24-2-N	5/8 - 18	2
CBM	22-3-N to 30-3-N	7/8 - 14	5
CAM	60 to 93	5/8 - 18	2
CAM	60 to 111	7/8 - 14	5
KBM	14-0-N to 20-3-N	5/8 - 18	2


\* The tooling adapters are provided with a MB-30.

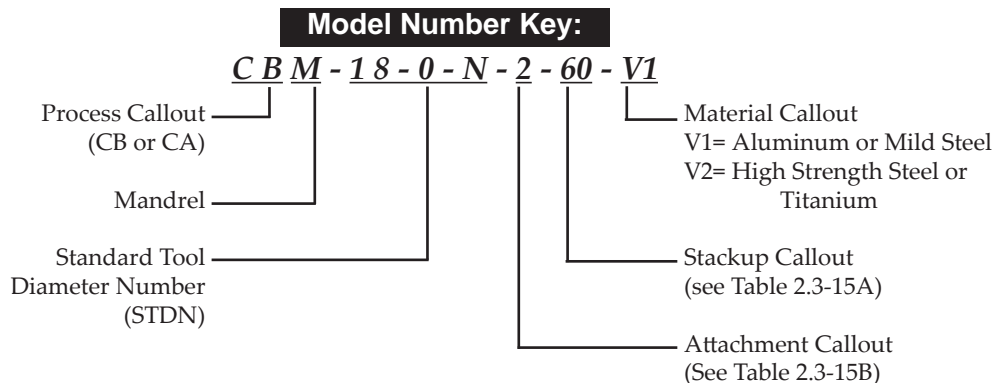

**Note:** The **bold** callouts are for use with the standard MB-30 Puller Unit and standard MB nose caps.

- UNCONTROLLED IF PRINTED -

## 2.3.16 BIG BRUTE MANDRELS

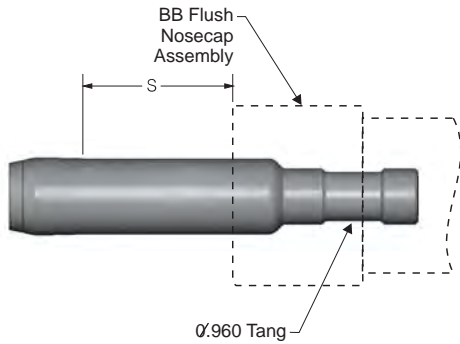

May be threaded.  
See Table 2.3-16B.

**Figure 2.3-16**  
**Big Brute Mandrel**

**Table 2.3-16A**  
**Stackup Callout**


With Flush Nosecap S (Ref. Fig. 2.3-16) (inch)	With 3-inch Extension Nosecap S (inch)	Mandrel Stackup Callouts
1.0	-----	10
1.5	-----	15
2.0	-----	20
2.5	-----	25
<b>3.0</b>	-----	<b>30</b>
3.5	.05	35
4.0	1.0	40
4.5	1.5	45
5.0	2.0	50
5.5	2.5	55
6.0	<b>3.0</b>	60
6.5	3.5	65
7.0	4.0	70

**Table 2.3-16B**  
**Attachment Callout**

Mandrel Prefix	Allowable STDN Range	Attachment Type	Attachment Callout
CB	32-0-N to 56-3-N	.960 inch tang	3
CB	32-0-N to 56-3-N	7/8 - 14 Thd 2 piece	4
CB	26-3-N to 56-3-N	1 - 14 Thd 1 piece	9
FM	-14 to -20 OS	.960	3

\* The 0.960 inch tang tooling adapter is provided with the BB-30.

\* The 7/8" and 1" threaded tooling adapter is provided with the BB-30A.

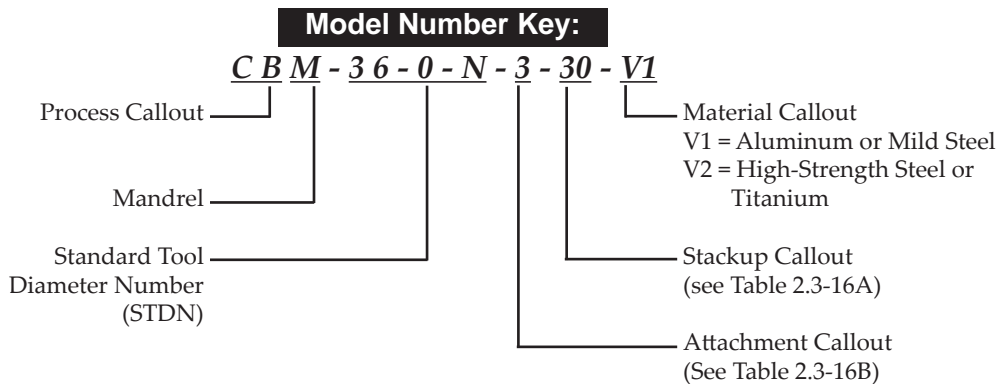

**Note:** The **bold** callouts are for use with the standard BB-30 Puller Unit and flush BB nose caps.

*Detailed Tooling*  
*Page 69*

- UNCONTROLLED IF PRINTED -

## 2.3.17 OFFSET MANDRELS



Midget Puller  
(FTMP) Mandrel



Hydraulic Offset Adapter  
(HOA) Mandrel



Little Brute Offset Adapter  
(LBOA) Mandrel




Medium Brute Offset Adapter  
(MBOA) Mandrel

**Figure 2.3-17**  
**Offset Mandrels**

- Used with a split sleeve to cold expand a restricted access hole.
- Identification is provided by an electroetched model number on the shank of the mandrel.
- Manufactured from high-strength, high-toughness alloy tool steel.
- Finished to a close diametrical tolerance of +/-0.0002 inch or tighter.
- Typically endures 1,000 to 5,000 applications before the major diameter becomes worn out (depends on material being cold worked).
- Short front taper (SFT) mandrels can be provided when backside clearance is limited.
- -V2 denotes increased material strength for use with titanium or high-strength steel applications.
- A barrel nut is provided on the LBOA mandrels, for sizes 14-0-N to 16-3-N, to ensure the mandrel is properly lined up with the puller unit and workpiece.

## 2.3.18 LITTLE BRUTE OFFSET ADAPTER MANDRELS

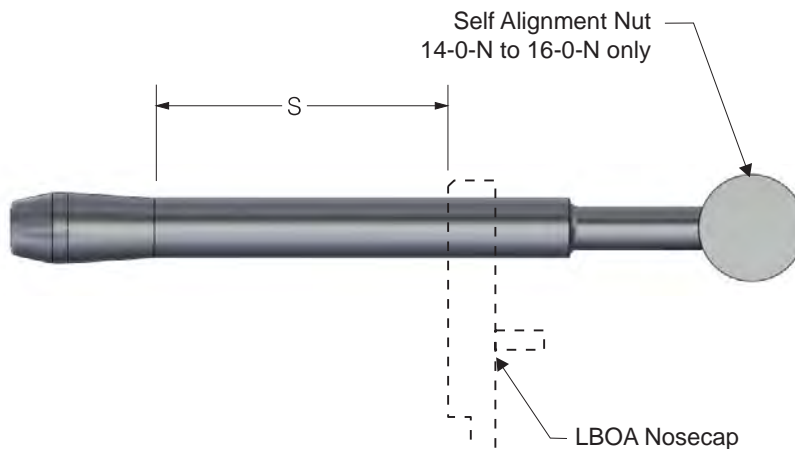

**Figure 2.3-18  
LBOA Mandrel**

**Table 2.3-18A  
Stackup Callout**


With 2-inch Extension Nosecap (inch)	Standard Flush Nosecap S (Ref. Fig. 2.3-18) (inch)	Stackup Callout
----	0.5	5
----	1.0	10
----	1.5	15
----	<b>2.0</b>	<b>20</b>
0.5	2.5	25
1.0	3.0	30
1.5	3.5	35
<b>2.0</b>	----	<b>40</b>
2.5	----	45
<b>3.0</b>	----	<b>50</b>
3.5	----	55

**Table 2.3-18B  
STDN Range**

Material Callout	Allowable STDN Range	Attachment Callout
Aluminum Mild Steel (-V1)	4-0-N to 12-3-N	1
Aluminum Mild Steel (-V1)	14-0-N to 16-3-N	10A
Titanium, High Strength Steel (-V2)	20 to 72	1

**Note:** The **bold** callouts are most common for use with the LBOA-20 Offset Adapter, LB-20 Puller Unit, and LBOA flush nosecaps.


**Model Number Key:**

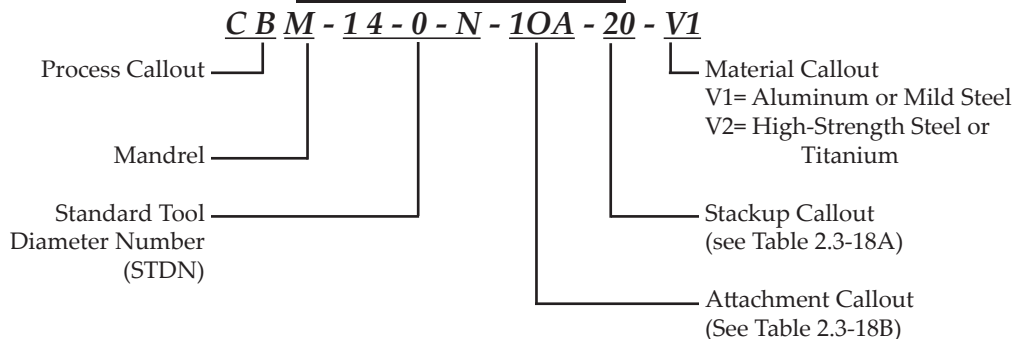

*Detailed Tooling  
Page 71*

- UNCONTROLLED IF PRINTED -

# 2.3.19 MEDIUM BRUTE OFFSET ADAPTER MANDRELS

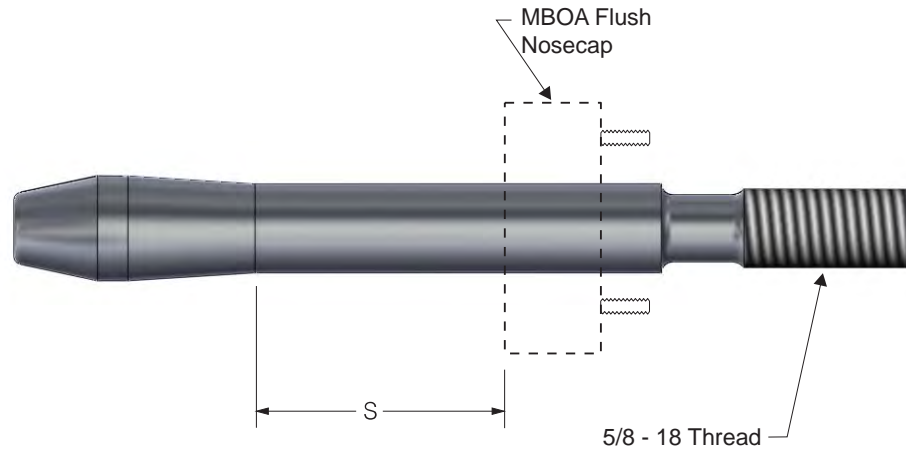

**Figure 2.3-19  
MBOA Mandrel**

**Table 2.3-19A  
Stackup Callout**


With Flush Nosecap S (Ref. Fig. 2.3-19) (inch)	With 3-inch Extension Nosecap S (Ref. Fig. 2.3-19) (inch)	Mandrel Stackup Callout
1.0	----	10
1.5	----	15
2.0	----	20
2.5	----	25
3.0	----	<b>30</b>
3.5	0.5	35
4.0	1.0	40
4.5	1.5	45
5.0	2.0	50
<b>5.5</b>	2.5	55
6.0	3.0	60
6.5	3.5	65
7.0	4.0	70

**Table 2.3-19B  
STDN Range**


Material Callout	Allowable STDN Range
Aluminum, Mild Steel (-V1)	12-0-N to 24-2-N
Titanium, High Strength Steel (-V2)	60 to 111

**Note:** The **bold** callouts are most common for use with the MBOA-30A Offset Adapter, MB-30 Puller Unit, and MBOA flush nosecaps.

**Model Number Key:**

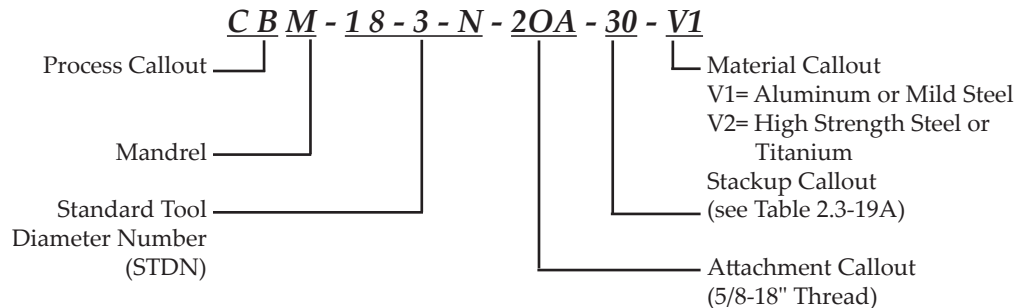

## 2.3.20 MIDGET PULLER MANDRELS

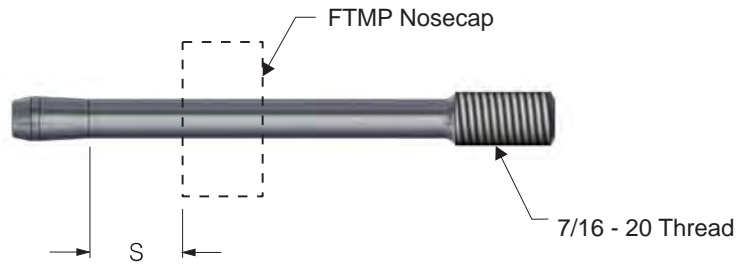

**Figure 2.3-20**  
**Midget Puller Mandrel**


**Table 2.3-20A**  
**Stackup Callout for**  
**FTMP-7 and FTMP-12**

With 1-inch Extension Nosecap S (inch)	With Flush Nosecap S (Ref. Fig. 2.3-20) (inch)	Mandrel Stackup Callout
-----	0.75	7
0.75	-----	17

**Table 2.3-20B**  
**STDN Range**

Material Callout	Allowable STDN Range
Aluminum, Mild Steel (-V1)	4-0-N to 12-0-N
Titanium, High Strength Steel (-V2)	20 to 33


**Note:** Use Midget Puller Units and Little Brute flush nose cap or extension nose cap jaws. The FTMP-8 requires special mandrel lengths. The FTMP-12 can use Little Brute mandrels, but one inch is lost to the puller.

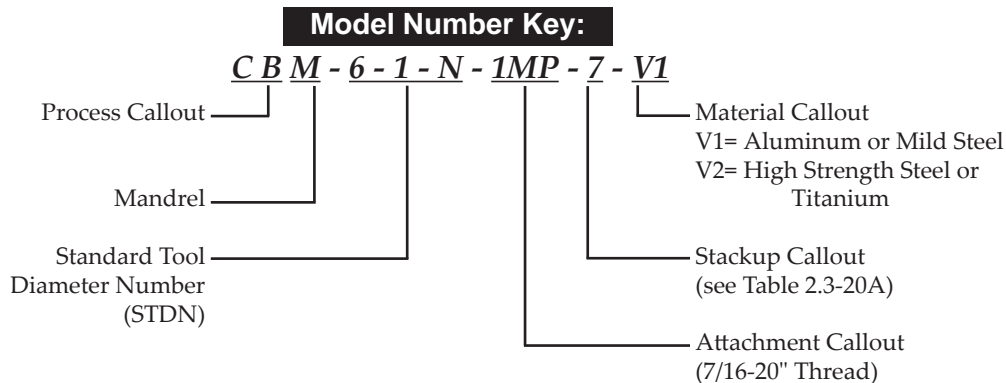

*Detailed Tooling*  
*Page 73*

- UNCONTROLLED IF PRINTED -

## 2.3.21 HYDRAULIC OFFSET ADAPTER MANDRELS

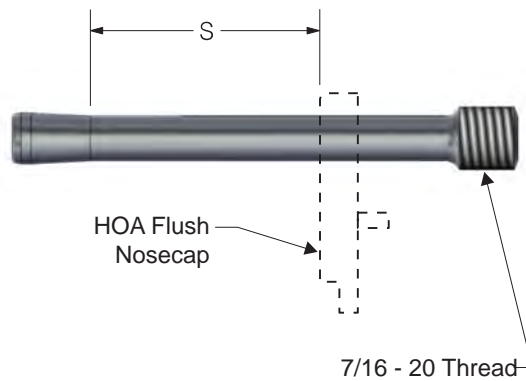

**Figure 2.3-21  
HOA Mandrel**

**Table 2.3-21A  
Stackup Callout**


With 2-inch Extension Nosecap S (Ref. Fig. 2.3-21) (inch)	With Flush Nosecap S (Ref. Fig. 2.3-21) (inch)	Mandrel Stackup Callout
-----	0.5	5
-----	1.0	10
-----	1.5	15
-----	<b>2.0</b>	<b>20</b>
0.5	2.5	25
1.0	-----	30
1.5	-----	35
2.0	-----	40
2.5	-----	45

**Table 2.3-21B  
STDN Range**


Material Callout	Allowable STDN Range
Aluminum, Mild Steel (-V1)	4-0-N to 14-3-N
Titanium, High Strength Steel (-V2)	CA-20 to CA-50

**Note:** The **bold** callouts are most common for use with the Hydraulic Offset Adapter and LBOA/HOA flush nose caps.

**Model Number Key:**

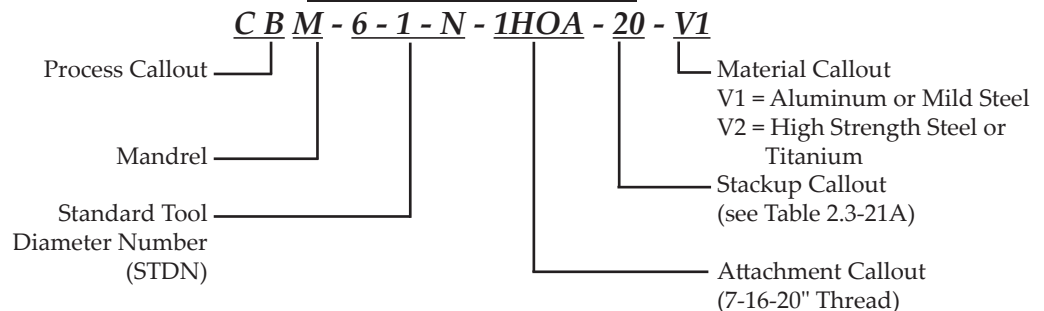

## 2.3.22 RIGHT ANGLE PULLER MANDREL

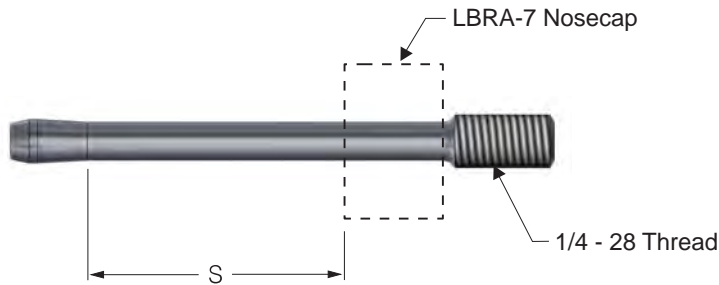


**Figure 2.3-22**  
**Right-Angle Puller Mandrel**

**Table 2.3-22**  
**Right-Angle Puller Mandrel Selection**

Model Number	STDN	Maximum Mandrel Length	Maximum Sleeve Length	Maximum Material Stackup S (Ref. Fig. 2.3-22) (inch)
LBRA-7	4-0-N	CBM-4-0-N-7-8-V1	CBS-4-0-N-12F	0.750
	4-1-N	CBM-4-1-N-7-8-V1	CBS-4-1-N-12F	0.750
	4-2-N	CBM-4-2-N-7-7.5-V1	CBS-4-2-N-12F	0.750
	4-3-N	CBM-4-3-N-7-7.5-V1	CBS-4-3-N-12F	0.750
	4-4-N	CBM-4-4-N-7-7.5-V1	CBS-4-4-N-12F	0.750
	6-0-N	CBM-6-0-N-7-7.5-V1	CBS-6-0-N-12F	0.750
	6-1-N	CBM-6-1-N-7-7.5-V1	CBS-6-1-N-12F	0.750
	6-2-N	CBM-6-2-N-7-7-V1	CBS-6-2-N-10F	0.625
	6-3-N	CBM-6-3-N-7-7-V1	CBS-6-3-N-10F	0.625
	8-0-N	CBM-8-0-N-7-7-V1	CBS-8-0-N-10F	0.625
	8-1-N	CBM-8-1-N-7-7-V1	CBS-8-1-N-10F	0.625
	8-2-N	CBM-8-2-N-7-6.5-V1	CBS-8-2-N-10F	0.625
	8-3-N	CBM-8-3-N-7-6.5-V1	CBS-8-3-N-10F	0.625
	10-0-N	CBM-10-0-N-7-6.5-V1	CBS-10-0-N-10F	0.625
	10-1-N	CBM-10-1-N-7-6.5-V1	CBS-10-1-N-10F	0.625
	10-2-N	CBM-10-2-N-7-6.5-V1	CBS-10-2-N-10F	0.625
	10-3-N	CBM-10-3-N-7-6.5-V1	CBS-10-3-N-10F	0.625
	12-0-N	CBM-12-0-N-7-6-V1	CBS-12-0-N-8F	0.500
	12-1-N	CBM-12-1-N-7-6-V1	CBS-12-1-N-8F	0.500
	12-2-N	CBM-12-2-N-7-6-V1	CBS-12-2-N-8F	0.500
12-3-N	CBM-12-3-N-7-6-V1	CBS-12-3-N-8F	0.500	


**Model Number Key:**

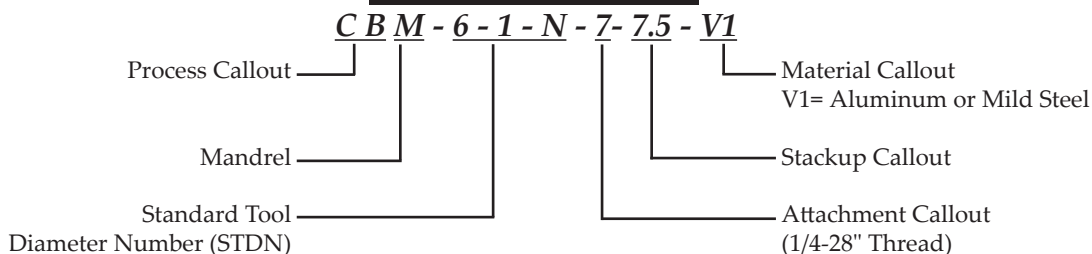

*Detailed Tooling*  
*Page 75*

- UNCONTROLLED IF PRINTED -

## 2.3.23 MODULAR EXTENSION NOSECAP ASSEMBLY

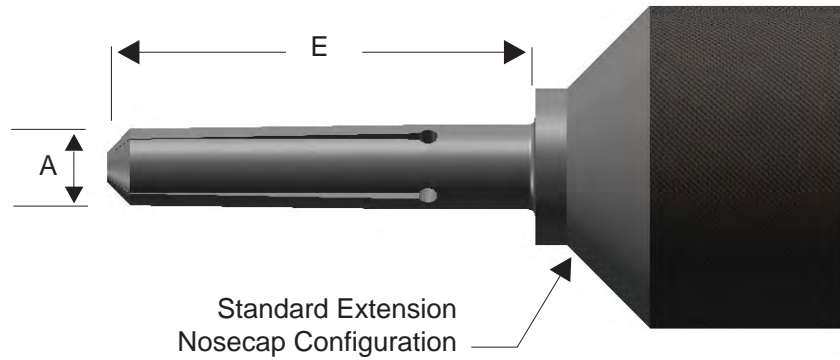

**Figure 2.3-23**  
**Modular Extension Nosecap**

- This product is designed as an improvement to standard CBCE nose caps. It is the preferred extension nose cap assembly, with interchangeable jaws.
- Single jaw and cap can be used together with tube and mandrel extension tooling to create a variety of lengths (see following pages).
- Can be extended in length for use when cold expanding holes through a drill fixture/ drill bushing, or when an obstruction is adjacent to the hole.
- Identification is provided by an electroetched model number on each piece.
- See table 2.3-24A for assembly model numbers.

### Jaw

#### Model Number Key:

MJ - A 4 - XXXXF

Modular Jaw

Jaw Size

Thread:

Length

A = 5/8 inch

(Ref. E, Fig. 2.3-23)

B = 7/8 inch

4 = 2 inches

C = 1-1/8 inches

6 = 3 inches

D = 1-3/8 inches

### Cap

#### Model Number Key:

MC - 1 A

Modular Cap

Thread

A = 5/8 inch

Puller Callout

B = 7/8 inch

1 = LB

C = 1-1/8 inches

2 = MB

D = 1-3/8 inches

4 = LBOA/HOA

5 = MBOA

9 = MBHO

**Table 2.3-24A**  
**Little Brute and Medium Brute**  
**Modular Extension Nosecaps Assemblies**

CB Tooling STDN Range	CA Tooling STDN Range	CR Tooling STDN Range	KB2 Tooling STDN Range	Little Brute Assembly Model No.	Medium Brute Assembly Model No.	Max. Jaw Dia. A Ref. Fig.2.3-23
4-0-N to 4-1-N	20 to 21	----	40-****-0 to 41-****-0	MEN-14A-0401F	----	0.358
4-2-N to 4-3-N	22 to 23	R30	42-****-0 to 43-****-0	MEN-14A-0423F	----	0.400
4-4-n to 6-1-N	30 to 31	----	60-****-0 to 61-****-0	MEN-14A-0601F	----	0.425
6-2-N to 6-3-N	32 to 33	R32	62-****-0 to 63-****-0	MEN-14A-0623F	----	0.458
8-0-N to 8-1-N	40 to 41	R40	80-****-0 to 81-****-0	MEN-14A-0801F	----	0.481
8-2-N to 8-3-N	42 to 43	R42	82-****-0 to 83-****-0	MEN-14A-0823F	----	0.514
10-0-N to 10-1-N	50 to 51	R50	100-****-0 to 101-****-0	MEN-14A-1001F	----	0.565
10-2-N to 10-3-N	52 to 53	R52	102-****-0 to 103-****-0	MEN-14A-1023F	MEN-26B-1023F	0.593
12-0-N to 12-1-N	60 to 61	R60	120-****-0 to 121-****-0	MEN-14A-1201F	MEN-26B-1201F	0.625
12-2-N to 12-3-N	62 to 63	R62	122-****-0 to 123-****-0	MEN-14A-1223F	MEN-26B-1223F	0.657
14-0-N to 14-1-N	70 to 71	----	----	MEN-14B-1401F	MEN-26B-1401F	0.689
14-2-N to 14-3-N	72 to 73	----	----	MEN-14B-1423F	MEN-26B-1423F	0.718
16-0-N to 16-1-N	80 to 81	----	----	MEN-14B-1601F	MEN-26B-1601F	0.760
16-2-N to 16-3-N	82 to 83	----	----	MEN-14B-1623F	MEN-26B-1623F	0.792
18-0-N to 18-1-N	90 to 91	----	----	----	MEN-26B-1801F	0.825
18-2-N to 18-3-N	92 to 93	----	----	----	MEN-26B-1823F	0.856
20-0-N to 20-1-N	100 to 101	----	----	----	MEN-26B-2001F	0.882
20-2-N to 20-3-N	102 to 103	----	----	----	MEN-26C-2023F	0.916
22-0-N to 22-1-N	110 to 111	----	----	----	MEN-26C-2201F	.945
22-2-N to 22-3-N	----	----	----	----	MEN-26C-2223F	.998
24-0-N to 24-1-N	----	----	----	----	MEN-26C-2401F	1.027
24-2-N to 24-3-N	----	----	----	----	MEN-26C-2423F	1.053
26-0-N to 26-1-N	----	----	----	----	MEN-26C-2601F	1.087
26-2-N to 26-3-N	----	----	----	----	MEN-26C-2623F	1.116
28-0-N to 28-1-N	----	----	----	----	MEN-26C-2801F	1.147
28-2-N to 28-3-N	----	----	----	----	MEN-26C-2823F	1.186
30-0N to 30-1-N	----	----	----	----	MEN-26C-3001F	1.210
30-2-N to 30-3-N	----	----	----	----	MEN-26D-3023F	1.241

**2.3.24**  
**MODULAR**  
**EXTENSION**  
**NOSECAP**  
**(MEN)**

**Assembly\***


**Model Number Key:**

MEN - 1 4 A - XXXXF

Modular Nosecap Assembly ———  
 Puller ———  
     1 = LB  
     2 = MB  
     4 = LBOA/HOA  
     5 = MBOA  
     9 = MBHO  
 Extension Length  
 in 1/2-inch increments ———

Tool Code ———  
 \* Assemblies are not marked with assembly model number. Each component is marked with its own model number.  
 Thread on Cap and Jaw ———  
 A = 5/8 inch  
 B = 7/8 inch  
 C = 1-1/8 inches  
 D = 1-1/4 inches

## 2.3.24 MODULAR EXTENSION NOSECAP (OPTION 1)

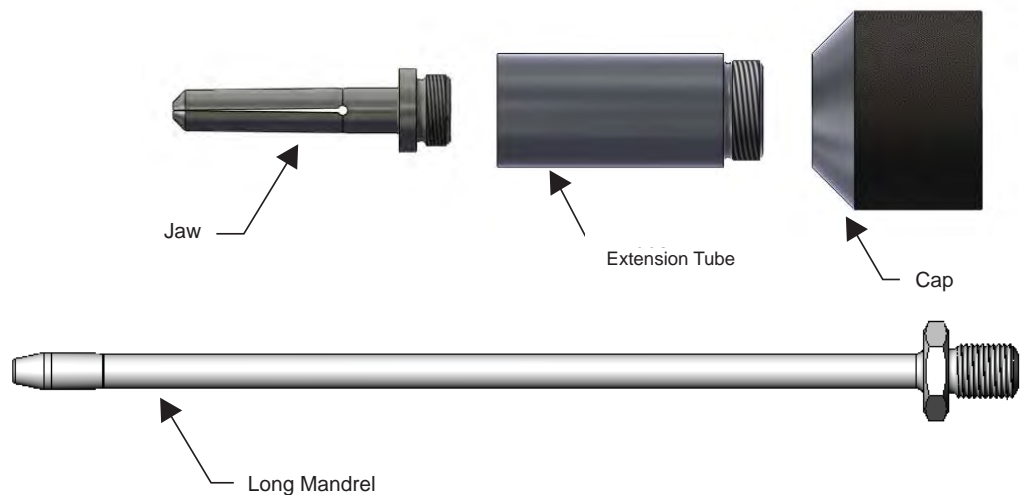

**Figure 2.3-24A**  
**Modular Extension Nosecap**  
**Option 1**


- Mandrel lengths will vary according to overall length of nosecap. The main feature of this product is the **Extension Tube** (in diagram above), which is used to increase the overall length of nosecap. The original CBCE system requires purchase of an entire new nosecap when different nosecap lengths are necessary. For additional information please contact our Customer Service Department.
- See Table 2.3-24B

### Tube

#### Model Number Key:


	<u>MT</u> - <u>A</u> - <u>XX</u>	
Modular Tube	└──┬──┘	└──┬──┘
Thread	└──┬──┘	└──┬──┘
A = 5/8 inch		Tube Length
B = 7/8 inch		Length = 2 x inch
C = 1-1/8 inches		4 = 2 inches
D = 1-3/8 inches		20 = 10 inches

## 2.3.24 MODULAR EXTENSION NOSECAP (OPTION 2)

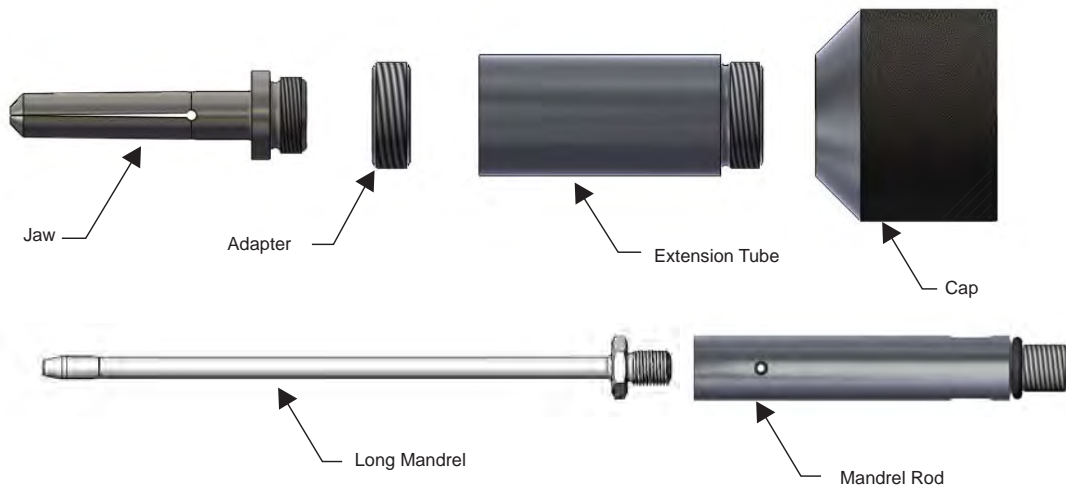

**Figure 2.3-24B**  
**Modular Extension Nosecap**  
**Option 2**

- This configuration utilizes a larger diameter extension tube, mandrel rod, and an adapter. This option allows the use of shorter length mandrels when using the MEN assembly. For example, the same mandrel can be used for both the 2-inch and 4-inch extension nosecaps when the correct mandrel rod is used.
- The adapter is required whenever a mandrel rod and extension tube are used.
- Uses interchangeable jaw, cap, and tube.
- See Table 2.3-24C

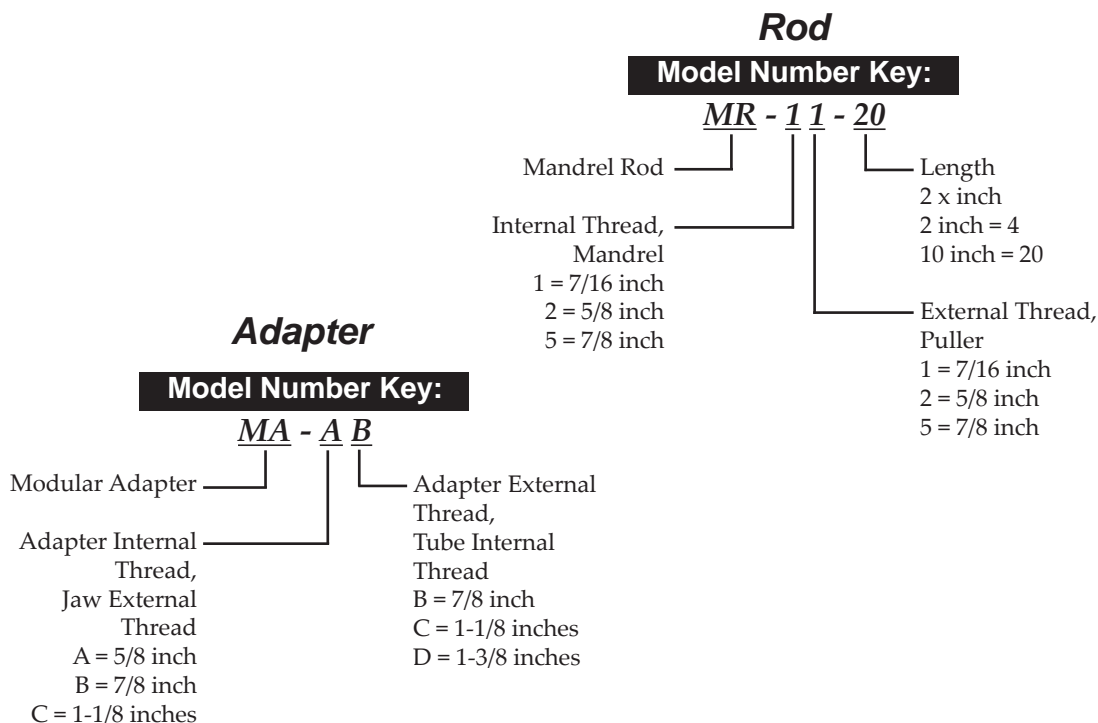

*Detailed Tooling*  
*Page 79*

- UNCONTROLLED IF PRINTED -

## 2.3.24 MODULAR EXTENSION NOSECAP


**Table 2.3-24B**  
**Modular Nosecaps for Use with Extension Tube**  
**Little Brute and Medium Brute Pullers (Option 1)**

CB STDN Range	CA STDN Range	CR STDN Range	KB2 STDN Range	Puller	Cap	Jaw Thread Callout	Extension Tube Fig. 2.3-24A	Applicable Mandrels
4-0-N thru 12-3-N	20 thru 63	R30 thru R-62	40-****-0 to 123-****-0	LB	MC-1A	A	MT-A-XX (dia. = .73)	CBM-X-X-N-1-XX-VX
14-0-N thru 16-3-N	70 thru 83	-----	-----	LB	MC-1B	B	MT-B-XX (dia. = 1.10)	CBM-X-X-N-1-XX-VX
10-0-N thru 20-1-N	50 thru 101	-----	-----	MB	MC-2B	B	MT-B-XX (dia. = 1.10)	CBM-X-X-N-2-XX-VX
20-2-N thru 24-2-N	102 thru 111	-----	-----	MB	MC-2C	C	MT-C-XX (dia. = 1.29)	CBM-X-X-N-2-XX-VX
22-3-N thru 30-1-N	-----	-----	-----	MB	MC-2C	C	MT-C-XX (dia. = 1.29)	CBM-X-X-N-5-XX-VX
30-2-N thru 30-3-N	-----	-----	-----	MB	MC-2D	D	MT-D-XX (dia. = 1.57)	CBM-X-X-N-5-XX-VX

**Table 2.3-24C**  
**Modular Nosecaps for Use with Mandrel Rod for**  
**Little Brute and Medium Brute Pullers (Option 2)**

CB STDN Range	CA STDN Range	CR STDN Range	KB2 STDN Range	Puller	Cap	Jaw Thread Callout	Extension Tube	Modular Tube Adapter	Mandrel Rod Fig. 2.3-24B	Applicable Mandrels
4-0-N thru 12-3-N	20 thru 63	R30 thru R-62	40-****-0 to 123-****-0	LB	MC-1B	A	MT-B-XX (dia. = 1.10)	MA-AB	MR-11-XX	CBM-X-X-N-1-XX-VX
10-0-N thru 16-3-N	50 thru 83	-----	-----	LB	MC-1B	B	MT-B-XX (dia. = 1.10)	N/A	MR-11-XX	CBM-X-X-N-1-XX-VX
10-0-N thru 20-1-N	50 thru 101	-----	-----	MB	MC-2C	B	MT-C-XX (dia. = 1.29)	MA-BC	MR-22-XX	CBM-X-X-N-2-XX-VX
20-2-N thru 24-2-N	102 thru 111	-----	-----	MB	MC-2C	C	MT-C-XX (dia. = 1.29)	N/A	MR-22-XX	CBM-X-X-N-2-XX-VX
22-3-N thru 30-1-N	-----	-----	-----	MB	MC-2D	C	MT-D-XX (dia. = 1.57)	MA-CD	MR-55-XX	CBM-X-X-N-5-XX-VX
30-2-N thru 30-3-N	-----	-----	-----	MB	MC-2D	D	MT-D-XX (dia. = 1.57)	N/A	MR-55-XX	CBM-X-X-N-5-XX-VX

## 2.3.25 MEN FOR LITTLE BRUTE OFFSET ADAPTER

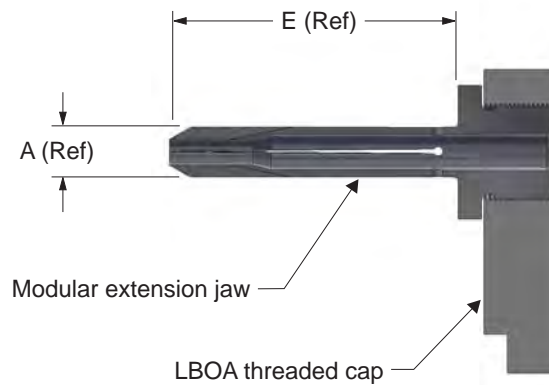


**Figure 2.3-25**  
**Little Brute Offset Adapter (LBOA)**  
**Modular Extension Nosecap**

- Jaw is a standard modular extension configuration and can be used with other puller caps with same jaw thread.
- Designed to hold flared split sleeve in the hole during puller operation and to transfer the reactive forces from the puller to the workpiece .
- Assembly consists of a threaded cap with a one-piece modular extension jaw that extends a minimum of two inches from the front of the cap.
- Modular extension jaws and threaded caps can be ordered separately.
- Identification is provided by an electroetched model number on each component.
- Other lengths available (E Ref. Figure 2.3-25). Please contact our Sales Staff.


### Cap

#### Model Number Key:

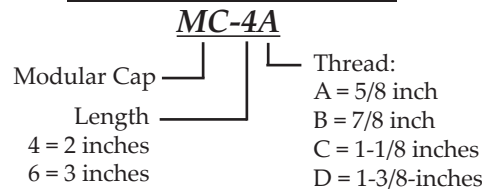


### Jaw

#### Model Number Key:

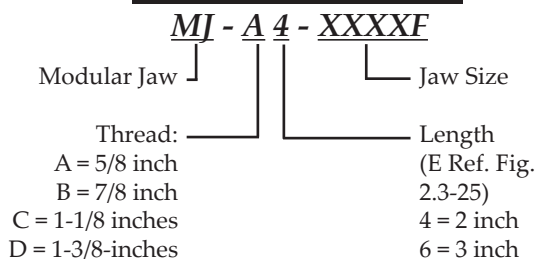

### Nosecap Assembly\*

#### Model Number Key:

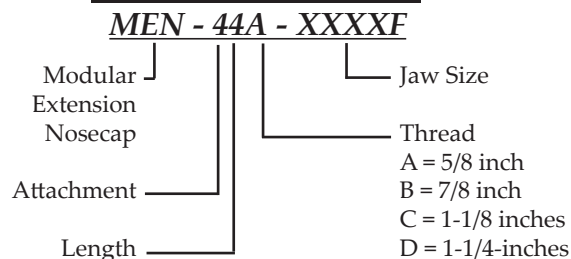

\*Parts are not marked with assembly number. Each component is marked with its own model number.

*Detailed Tooling*  
*Page 81*

- UNCONTROLLED IF PRINTED -

**2.3.25  
MEN FOR  
LITTLE BRUTE  
OFFSET  
ADAPTER**

**Table 2.3-25A  
STDN Range**

CB Tooling	KB2 Tooling	CR Tool STDN	CA Tooling	A Max. (Ref. Fig. 2.3-25) (inch)	Jaw Model Number	Modular Cap/Jaw Attachment Plate	Modular Assembly
4-0-N to 4-1-N	40-****-0 to 41-****-0	-----	20 to 21	0.358	MJ-A4-0401F	MC-4A	MEN-44A-0401F
4-2-N to 4-3-N	42-****-0 to 43-****-0	-----	22 to 23	0.400	MJ-A4-0423F	MC-4A	MEN-44A-0423F
4-4-n to 6-1-N	60-****-0 to 61-****-0	R30	30 to 31	0.425	MJ-A4-0601F	MC-4A	MEN-44A-0601F
6-2-N to 6-3-N	62-****-0 to 63-****-0	R32	32 to 33	0.458	MJ-A4-0623F	MC-4A	MEN-44A-0623F
8-0-N to 8-1-N	80-****-0 to 81-****-0	R40	40 to 41	0.481	MJ-A4-0801F	MC-4A	MEN-44A-0801F
8-2-N to 8-3-N	82-****-0 to 83-****-0	R42	42 to 43	0.514	MJ-A4-0823F	MC-4A	MEN-44A-0823F
10-0-N to 10-1-N	100-****-0 to 101-****-0	R50	50 to 51	0.565	MJ-A4-1001F	MC-4A	MEN-44A-1001F
10-2-N to 10-3-N	102-****-0 to 103-****-0	R52	52 to 53	0.593	MJ-A4-1023F	MC-4A	MEN-44A-1023F
12-0-N to 12-1-N	120-****-0 to 121-****-0	R60	-----	0.625	MJ-A4-1201F	MC-4A	MEN-44A-1201F
12-2-N to 12-3-N	122-****-0 to 123-****-0	R62	-----	0.657	MJ-A4-1223F	MC-4A	MEN-44A-1223F
14-0-N to 14-1-N	-----	-----	-----	0.689	MJ-B4-1401F	MC-4B	MEN-44B-1401F
14-2-N to 14-3-N	-----	-----	-----	0.718	MJ-B4-1423F	MC-4B	MEN-44B-1423F
16-0-N to 16-1-N	-----	-----	-----	0.760	MJ-B4-1601F	MC-4B	MEN-44B-1601F
16-2-N to 16-3-N	-----	-----	-----	0.762	MJ-B4-1623F	MC-4B	MEN-44B-1623F
18-0-N to 18-1-N	-----	-----	-----	0.825	MJ-B6-1801F*	MC-4B	MEN-46B-1801F
18-2-N to 18-3-N	-----	-----	-----	0.856	MJ-B6-1823F*	MC-4B	MEN-46B-1823F

\*18-0-N through 18-3-N jaws are 3-inch minimum extension lengths.


\*\*\*\* Refer to Cx2s Tooling for complete STDN information

**Table 2.3-25B  
Extension Callouts**

Extension Callouts	E (Ref. Fig. 2.3-25) (inches)
4*	2.0
6	3.0

\*Only available up to 16-3-N.

## 2.3.26 MEN FOR MEDIUM BRUTE OFFSET ADAPTER

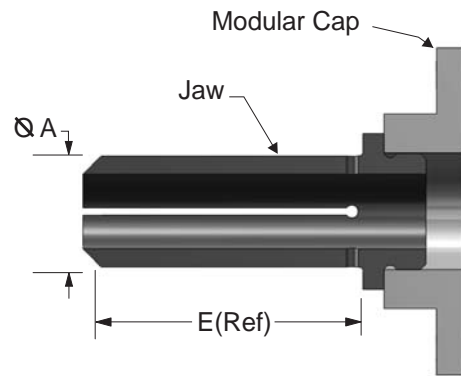

**Figure 2.3-26**  
**MBOA Modular Extension Nosecap**

- Designed to hold the split sleeve in the hole during puller operation and to transfer the reactive forces from the puller to the workpiece.
- For cold expanding holes in aluminum up to 15/16-inch diameter and up to 1/2-inch diameter in steel and titanium in restricted access areas.
- Assembly consists of a one-piece jaw with a modular cap.
- Jaws and modular caps can be ordered separately (see Table 2.3-26B).
- Identification is provided by an electroetched model number.
- Other sizes are available. Please contact our Sales Staff for more information.


**Table 2.3-26A**  
**Extension Callouts**

Extension Callouts	E (Ref. Fig. 2.3-26) (inches)
4*	2.0
6	3.0

\*Only available up to 16-3-N.


### Cap

**Model Number Key:**

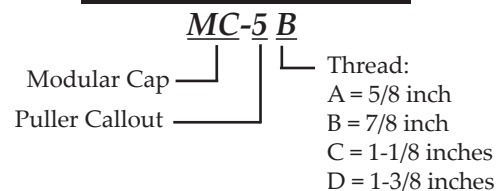

### Nosecap Assembly\*

**Model Number Key:**

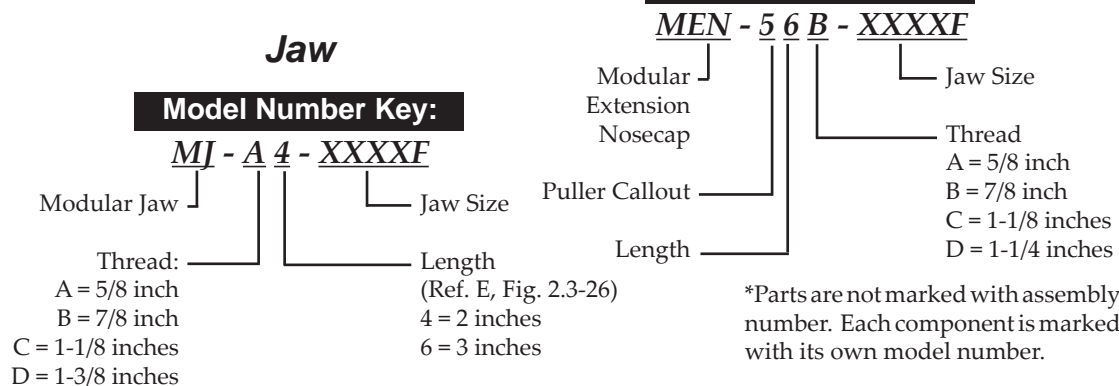

*Detailed Tooling*  
*Page 83*

- UNCONTROLLED IF PRINTED -

**2.3.26**  
**MEN FOR**  
**MEDIUM BRUTE**  
**OFFSET**  
**ADAPTER**


**Table 2.3-26B**  
**MBOA Modular Extension Nosecap Specifications**

CB Tooling	CA Tooling	A Diameter (Ref. Fig. 2.3-26) (inch)	Jaw Model Number	Jaw Attachment Plate (cap)	Modular Assembly
10-0-N	50	0.565	MJ-B6-1001F	MC-5B	MEN-56B-1001F
10-1-N	51	0.565	MJ-B6-1001F	MC-5B	MEN-56B-1001F
10-2-N	52	0.593	MJ-B6-1023F	MC-5B	MEN-56B-1023F
10-3-N	53	0.593	MJ-B6-1023F	MC-5B	MEN-56B-1023F
12-0-N	60	0.625	MJ-B6-1201F	MC-5B	MEN-56B-1201F
12-1-N	61	0.625	MJ-B6-1201F	MC-5B	MEN-56B-1201F
12-2-N	62	0.657	MJ-B6-1223F	MC-5B	MEN-56B-1223F
12-3-N	63	0.657	MJ-B6-1223F	MC-5B	MEN-56B-1223F
14-0-N	70	0.689	MJ-B6-1401F	MC-5B	MEN-56B-1401F
14-1-N	71	0.689	MJ-B6-1401F	MC-5B	MEN-56B-1401F
14-2-N	72	0.718	MJ-B6-1423F	MC-5B	MEN-56B-1423F
14-3-N	73	0.718	MJ-B6-1423F	MC-5B	MEN-56B-1423F
16-0-N	80	0.760	MJ-B6-1601F	MC-5B	MEN-56B-1601F
16-1-N	81	0.760	MJ-B6-1601F	MC-5B	MEN-56B-1601F
16-2-N	82	0.792	MJ-B6-1623F	MC-5B	MEN-56B-1623F
16-3-N	83	0.792	MJ-B6-1623F	MC-5B	MEN-56B-1623F
18-0-N	90	0.825	MJ-B6-1801F	MC-5B	MEN-56B-1801F
18-1-N	91	0.825	MJ-B6-1801F	MC-5B	MEN-56B-1801F
18-2-N	92	0.856	MJ-B6-1823F	MC-5B	MEN-56B-1823F
18-3-N	93	0.856	MJ-B6-1823F	MC-5B	MEN-56B-1823F
20-0-N	100	0.882	MJ-B6-2001F	MC-5B	MEN-56B-2001F
20-1-N	101	0.882	MJ-B6-2001F	MC-5B	MEN-56B-2001F
20-2-N	102	0.916	MJ-C6-2023F	MC-5C	MEN-56C-2023F
20-3-N	103	0.916	MJ-C6-2023F	MC-5C	MEN-56C-2023F
22-0-N	110	0.946	MJ-C6-2201F	MC-5C	MEN-56C-2201F
22-1-N	111	0.946	MJ-C6-2201F	MC-5C	MEN-56C-2201F
22-2-N	----	0.998	MJ-C6-2223F	MC-5C	MEN-56C-2223F
22-3-N	----	0.998	MJ-C6-2223F	MC-5C	MEN-56C-2223F
24-0-N	----	1.027	MJ-C6-2401F	MC-5C	MEN-56C-2401F
24-1-N	----	1.027	MJ-C6-2401F	MC-5C	MEN-56C-2401F
24-2-N	----	1.053	MJ-C6-2423F	MC-5C	MEN-56C-2423F
24-3-N	----	1.053	MJ-C6-2423F	MC-5C	MEN-56C-2423F
26-0-N	----	1.087	MJ-C6-2601F	MC-5C	MEN-56C-2601F
26-1-N	----	1.087	MJ-C6-2601F	MC-5C	MEN-56C-2601F
26-2-N	----	1.116	MJ-C6-2623F	MC-5C	MEN-56C-2623F
26-3-N	----	1.116	MJ-C6-2623F	MC-5C	MEN-56C-2623F
28-0-N	----	1.147	MJ-C6-2801F	MC-5C	MEN-56C-2801F
28-1-N	----	1.147	MJ-C6-2801F	MC-5C	MEN-56C-2801F
28-2-N	----	1.186	MJ-C6-2823F	MC-5C	MEN-56C-2823F
28-3-N	----	1.186	MJ-C6-2823F	MC-5C	MEN-56C-2823F
30-0-N	----	1.210	MJ-C6-3001F	MC-5C	MEN-56C-3001F
30-1-N	----	1.210	MJ-C6-3001F	MC-5C	MEN-56C-3001F
30-2-N	----	1.241	MJ-C6-3023F	MC-5D	MEN-56D-3023F
30-3-N	----	1.241	MJ-C6-3023F	MC-5D	MEN-56D-3023F

- UNCONTROLLED IF PRINTED -

Detailed Tooling  
Page 84

## 2.3.27 MEN FOR MEDIUM BRUTE HYDRAULIC OFFSET

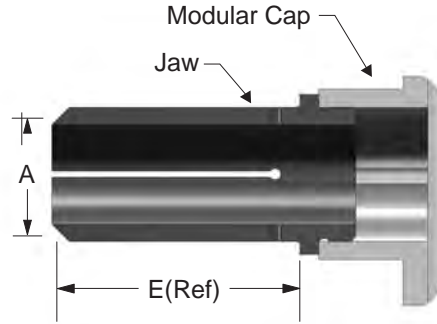

**Figure 2.3-27**  
**MBHO Modular Extension Nosecap**

- Jaw is the same as standard MEN, thus they are interchangeable.
- Designed to hold the split sleeve in the hole during puller operation and to transfer the reactive forces from the puller to the workpiece.
- For cold expanding holes in aluminum up to 15/16-inch diameter and up to 1/2-inch diameter in steel and titanium in restricted access areas.
- Assembly consists of a one-piece jaw with a modular cap.
- Jaws and modular cap can be ordered separately (see Table 2.3-27B).
- Identification is provided by an electroetched model number.
- Other sizes are available. Please contact our Sales Staff for more information.


**Table 2.3-27A**  
**Extension Callouts**

Extension Callouts	E (Ref. Fig. 2.3-27) (inches)
4*	2.0
6	3.0

\*Only available up to 16-3-N.


### Cap

**Model Number Key:**

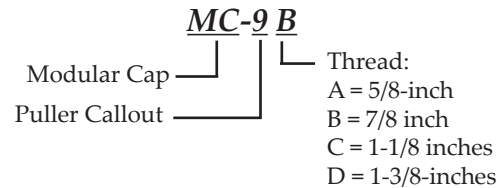


### Jaw

**Model Number Key:**

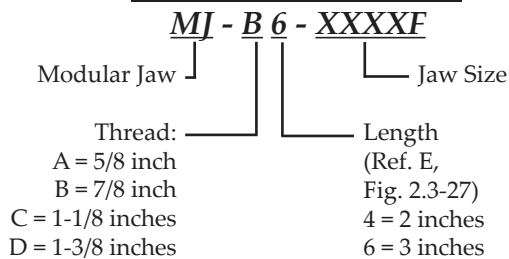

### Nosecap Assembly\*

**Model Number Key:**

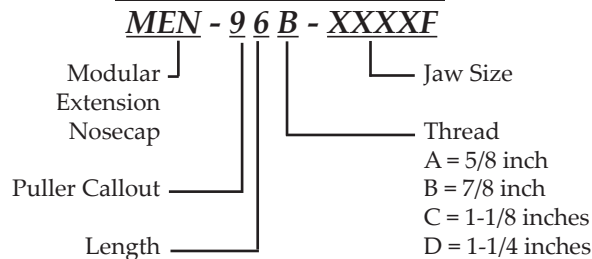

\* Parts are not marked with assembly number. Each component is marked with it's own model number.

- UNCONTROLLED IF PRINTED -

*Detailed Tooling*  
*Page 85*

**2.3.27**  
**MEN FOR**  
**MEDIUM BRUTE**  
**HYDRAULIC**  
**OFFSET**


**Table 2.3-27B**  
**MBHO Modular Extension Nosecap Specifications**

CB Tooling	CA Tooling	A Diameter (Ref. Fig. 2.3-27) (inch)	Jaw Model Number	Jaw Attachment Plate (cap)	Modular Assembly
10-0-N	50	0.565	MJ-B6-1001F	MC-9B	MEN-96B-1001F
10-1-N	51	0.565	MJ-B6-1001F	MC-9B	MEN-96B-1001F
10-2-N	52	0.593	MJ-B6-1023F	MC-9B	MEN-96B-1023F
10-3-N	53	0.593	MJ-B6-1023F	MC-9B	MEN-96B-1023F
12-0-N	60	0.625	MJ-B6-1201F	MC-9B	MEN-96B-1201F
12-1-N	61	0.625	MJ-B6-1201F	MC-9B	MEN-96B-1201F
12-2-N	62	0.657	MJ-B6-1223F	MC-9B	MEN-96B-1223F
12-3-N	63	0.657	MJ-B6-1223F	MC-9B	MEN-96B-1223F
14-0-N	70	0.689	MJ-B6-1401F	MC-9B	MEN-96B-1401F
14-1-N	71	0.689	MJ-B6-1401F	MC-9B	MEN-96B-1401F
14-2-N	72	0.718	MJ-B6-1423F	MC-9B	MEN-96B-1423F
14-3-N	73	0.718	MJ-B6-1423F	MC-9B	MEN-96B-1423F
16-0-N	80	0.760	MJ-B6-1601F	MC-9B	MEN-96B-1601F
16-1-N	81	0.760	MJ-B6-1601F	MC-9B	MEN-96B-1601F
16-2-N	82	0.792	MJ-B6-1623F	MC-9B	MEN-96B-1623F
16-3-N	83	0.792	MJ-B6-1623F	MC-9B	MEN-96B-1623F
18-0-N	90	0.825	MJ-B6-1801F	MC-9B	MEN-96B-1801F
18-1-N	91	0.825	MJ-B6-1801F	MC-9B	MEN-96B-1801F
18-2-N	92	0.856	MJ-B6-1823F	MC-9B	MEN-96B-1823F
18-3-N	93	0.856	MJ-B6-1823F	MC-9B	MEN-96B-1823F
20-0-N	100	0.892	MJ-B6-2001F	MC-9B	MEN-96B-2001F
20-1-N	101	0.892	MJ-B6-2001F	MC-9B	MEN-96B-2001F
20-2-N	102	0.916	MJ-C6-2023F	MC-9C	MEN-96B-2023F
20-3-N	103	0.916	MJ-C6-2023F	MC-9C	MEN-96B-2023F
22-0-N	110	0.946	MJ-C6-2201F	MC-9C	MEN-96B-2201F
22-1-N	111	0.946	MJ-C6-2201F	MC-9C	MEN-96B-2201F
22-2-N	----	0.998	MJ-C6-2223F	MC-9C	MEN-96C-2223F
22-3-N	----	0.998	MJ-C6-2223F	MC-9C	MEN-96C-2223F
24-0-N	----	1.027	MJ-C6-2401F	MC-9C	MEN-96C-2401F
24-1-N	----	1.027	MJ-C6-2401F	MC-9C	MEN-96C-2401F
24-2-N	----	1.053	MJ-C6-2423F	MC-9C	MEN-96C-2423F
24-3-N	----	1.053	MJ-C6-2423F	MC-9C	MEN-96C-2423F
26-0-N	----	1.087	MJ-C6-2601F	MC-9C	MEN-96C-2601F
26-1-N	----	1.087	MJ-C6-2601F	MC-9C	MEN-96C-2601F
26-2-N	----	1.116	MJ-C6-2623F	MC-9C	MEN-96C-2623F
26-3-N	----	1.116	MJ-C6-2623F	MC-9C	MEN-96C-2623F
28-0-N	----	1.147	MJ-C6-2801F	MC-9C	MEN-96C-2801F
28-1-N	----	1.147	MJ-C6-2801F	MC-9C	MEN-96C-2801F
28-2-N	----	1.186	MJ-C6-2823F	MC-9C	MEN-96C-2823F
28-3-N	----	1.186	MJ-C6-2823F	MC-9C	MEN-96C-2823F
30-0-N	----	1.210	MJ-C6-3001F	MC-9C	MEN-96C-3001F
30-1-N	----	1.210	MJ-C6-3001F	MC-9C	MEN-96C-3001F
30-2-N	----	1.241	MJ-D6-3023F	MC-9D	MEN-96D-3023F
30-3-N	----	1.241	MJ-D6-3023F	MC-9D	MEN-96D-3023F

- UNCONTROLLED IF PRINTED -

Detailed Tooling  
Page 86

## 2.3.28 LITTLE BRUTE NOSECAP ASSEMBLIES

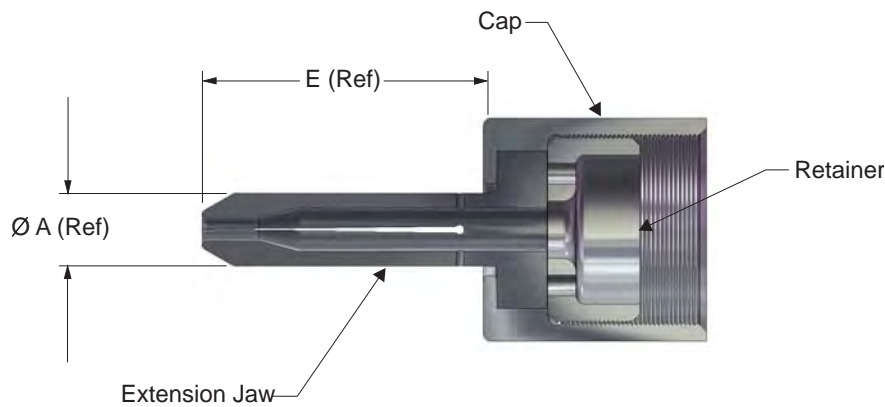

**Figure 2.3-28**  
**Little Brute Nosecap Assembly**

- Designed to hold the split sleeve in the hole during puller operation and to transfer the reactive forces from the puller to the workpiece.
- Can also be used when cold expanding holes through a drill fixture/drill bushing, or when an obstruction reduces access to the hole.
- Nosecap consists of a three-piece assembly including a cap, a one-piece extension jaw set that protrudes two inches from the front of the cap, and a retainer.
- Replacement extension jaws can be ordered separately.
- Identification is provided by an electroetched model number.
- Special extension jaw lengths of other than two inches are available, please refer to Table 2.3-28A.

**Table 2.3-28A**  
**Extension Callouts**

Extension Callouts	E (Ref. Fig. 2.3-28) (inches)
4	2.0
5	2.5
6	3.0

SUPERSEDED BY  
 MODULAR EXTENSION NOSECAP  
 See Table 2.3-28E-F

*Detailed Tooling*  
*Page 87*

- UNCONTROLLED IF PRINTED -

# 2.3.28 LITTLE BRUTE NOSECAP ASSEMBLIES

SUPERSEDED BY  
MODULAR EXTENSION NOSECAP  
See Table 2.3-28E-F

**Table 2.3-28B  
CB and KB2 Tooling**

CB Tooling STDN Range	KB2 Tooling STDN Range	A Diameter (Ref. Fig. 2.3-28) (inch)	Assembly Model Number
4-0-N to 4-1-N	40-****-0 to 41-****-0	0.490	CBCE-14A-0401F
4-2-N to 4-3-N	42-****-0 to 43-****-0	0.490	CBCE-14A-0423F
6-2-N to 6-1-N	60-****-0 to 61-****-0	0.490	CBCE-14A-0601F
6-2-N to 6-3-N	62-****-0 to 63-****-0	0.490	CBCE-14A-0623F
8-0-N to 8-1-N	80-****-0 to 81-****-0	0.490	CBCE-14A-0801F
8-2-N to 8-3-N	82-****-0 to 83-****-0	0.490	CBCE-14A-0823F
10-0-N to 10-1-N	100-****-0 to 101-****-0	0.615	CBCE-14B-1001F
10-2-N to 10-3-N	102-****-0 to 103-****-0	0.615	CBCE-14B-1023F
12-0-N to 12-1-N	120-****-0 to 121-****-0	0.615	CBCE-14B-1201F
12-2-N to 12-3-N	122-****-0 to 123-****-0	0.615	CBCE-14B-1223F
14-0-N to 14-1-N	----	0.741	CBCE-14C-1401F
14-2-N to 14-3-N	----	0.741	CBCE-14C-1423F
16-0-N to 16-1-N	----	0.741	CBCE-14C-1601F
16-2-N to 16-3-N	----	0.741	CBCE-14C-1623F

\*\*\* Refer to Cx2s Tooling for complete STDN information.

**Table 2.3-28C  
CA Tooling**

STDN Range	A Diameter (Ref. Fig. 2.3-28) (inch)	Assembly Model Number
20 to 21	0.490	CBCE-14A-0401F
22 to 23	0.490	CBCE-14A-0423F
30 to 31	0.490	CBCE-14A-0601F
32 to 33	0.490	CBCE-14A-0623F
40 to 41	0.615	CBCE-14B-0801F
42 to 43	0.615	CBCE-14B-0823F
50 to 51	0.615	CBCE-14B-1001F
52 to 53	0.615	CBCE-14B-1023F


**Note:** When ordering replacement jaws, add -JO to the assembly model number.

**Table 2.3-28D  
CR Tooling**

STDN Range	A Diameter (Ref. Fig. 2.3-28) (inch)	Assembly Model Number
R30	0.490	CRCE-R30-1
R32	0.490	CRCE-R32-1
R40	0.490	CRCE-R40-1
R42	0.490	CRCE-R42-1
R50	0.615	CRCE-R50-1
R52	0.615	CRCE-R52-1
R60	0.615	CRCE-R60-1
R62	0.615	CRCE-R62-1

**Note:** CR nose caps have a 2-inch extension callout.

**Model Number Key:**

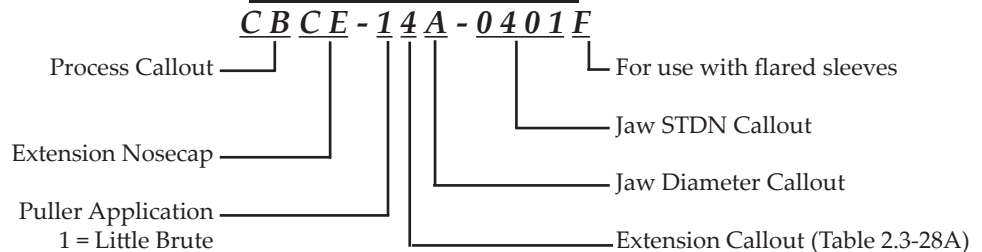

Detailed Tooling  
Page 88

- UNCONTROLLED IF PRINTED -

**Table 2.3-28E**  
**Little Brute CB Tooling &**  
**CA Nosecaps**

Extension Nosecap	Modular Extension Nosecap
CBCE-14A-0401F	MEN-14A-0401F
CBCE-14A-0423F	MEN-14A-0423F
CBCE-14A-0601F	MEN-14A-0601F
CBCE-14A-0623F	MEN-14A-0623F
CBCE-14A-0801F	MEN-14A-0801F
CBCE-14A-0823F	MEN-14A-0823F
CBCE-14B-1001F	MEN-14A-1001F
CBCE-14B-1023F	MEN-14A-1023F
CBCE-14B-1201F	MEN-14A-1201F
CBCE-14B-1223F	MEN-14A-1223F
CBCE-14C-1401F	MEN-14B-1401F
CBCE-14C-1423F	MEN-14B-1423F
CBCE-14C-1601F	MEN-14B-1601F
CBCE-14C-1623F	MEN-14B-1623F


**Table 2.3-28F**  
**Little Brute CA Nosecaps**

Extension Nosecap	Modular Extension Nosecap
CACE-14A-201F	MEN-14A-0401F
CACE-14A-223F	MEN-14A-0423F
CACE-14A-301F	MEN-14A-0601F
CACE-14A-323F	MEN-14A-0623F
CACE-14B-401F	MEN-14A-0801F
CACE-14B-423F	MEN-14A-0823F
CACE-14B-501F	MEN-14A-1001F
CACE-14B-523F	MEN-14A-1023F

**2.3.28**  
**LB EXTENSION**  
**TO MODULAR**  
**NOSECAP**  
**CONVERSIONS**

## 2.3.29 MEDIUM BRUTE EXTENSION NOSECAPS


SUPERSEDED BY  
 MODULAR EXTENSION NOSECAP  
 See Table 2.3-29C

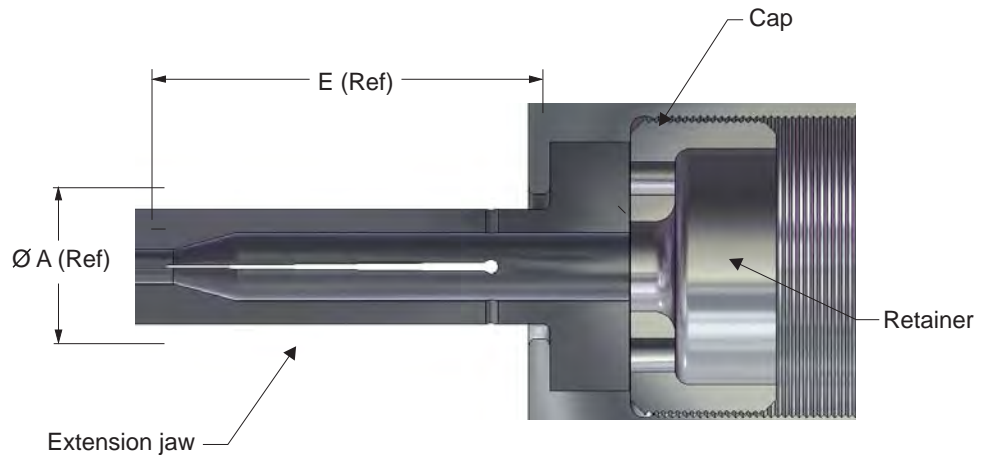

**Figure 2.3-29**  
**Medium Brute Extension Nosecap**

- Designed to hold the split sleeve in the hole during puller operation and to transfer the reactive forces from the puller to the workpiece.
- Can also be used when cold expanding holes through a drill fixture/drill bushing or when an obstruction is adjacent to the hole.
- Consists of a three-piece assembly including a cap, a one-piece extension jaw set that protrudes from the front of the cap, and a retainer.
- Identification is provided by an electroetched model number.
- Replacement jaws can be ordered separately.
- For other sizes and extension lengths, please contact our Sales Staff.

**Model Number Key:**

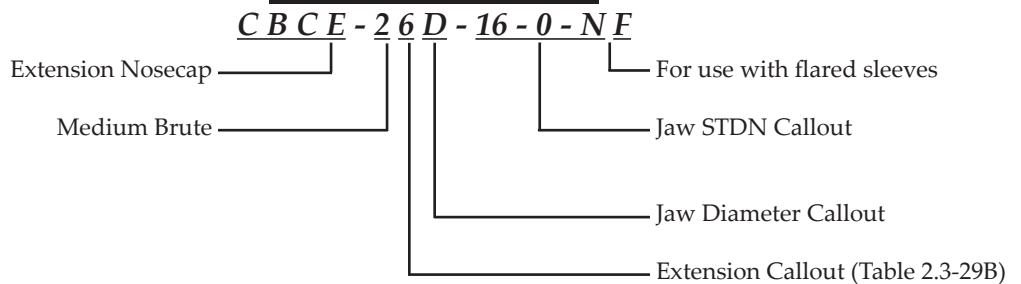

Detailed Tooling  
Page 90

- UNCONTROLLED IF PRINTED -

**Table 2.3-29A**  
**Medium Brute Extension Nosecap**

CB Tooling	CA Tooling	A Diameter (Ref. Fig. 2.3-29) (inches)	Assembly Model Number
10-3-N	60	0.865	CBCE-26D-10-3-NF
12-0-N	61	0.865	CBCE-26D-12-0-NF
12-1-N	62	0.865	CBCE-26D-12-1-NF
12-2-N	63	0.865	CBCE-26D-12-2-NF
12-3-N	70	0.865	CBCE-26D-12-3-NF
14-0-N	71	0.865	CBCE-26D-14-0-NF
14-1-N	72	0.865	CBCE-26D-14-1-NF
14-2-N	73	0.865	CBCE-26D-14-2-NF
14-3-N	80	0.865	CBCE-26D-14-3-NF
16-0-N	81	0.865	CBCE-26D-16-0-NF
16-1-N	82	0.865	CBCE-26D-16-1-NF
16-2-N	83	0.865	CBCE-26D-16-2-NF
16-3-N	90	0.865	CBCE-26D-16-3-NF
18-0-N	91	0.865	CBCE-26D-18-0-NF
18-1-N	92	0.865	CBCE-26D-18-1-NF
18-2-N	93	0.865	CBCE-26D-18-2-NF
18-3-N	100	0.865	CBCE-26D-18-3-NF
20-0-N	101	0.865	CBCE-26D-20-0-NF
20-1-N	102	0.865	CBCE-26D-20-1-NF
20-2-N	103	1.105	CBCE-26E-20-2-NF
20-3-N	110	1.105	CBCE-26E-20-3-NF
22-0-N	111	1.105	CBCE-26E-22-0-NF
22-1-N	-----	1.105	CBCE-26E-22-1-NF
22-2-N	-----	1.105	CBCE-26E-22-2-NF
22-3-N	-----	1.105	CBCE-26E-22-3-NF
24-0-N	-----	1.105	CBCE-26E-24-0-NF
24-1-N	-----	1.105	CBCE-26E-24-1-NF
24-2-N	-----	1.105	CBCE-26E-24-2-NF
24-3-N	-----	1.105	CBCE-26E-24-3-NF
26-0-N	-----	1.105	CBCE-26E-26-0-NF
26-1-N	-----	1.105	CBCE-26E-26-1-NF
26-2-N	-----	1.105	CBCE-26E-26-2-NF
26-3-N	-----	1.105	CBCE-26E-26-3-NF
28-0-N	-----	1.235	CBCE-26F-28-0-NF
28-1-N	-----	1.235	CBCE-26F-28-1-NF
28-2-N	-----	1.235	CBCE-26F-28-2-NF
28-3-N	-----	1.235	CBCE-26F-28-3-NF
30-0-N	-----	1.235	CBCE-26F-30-0-NF
30-1-N	-----	1.235	CBCE-26F-30-1-NF
30-2-N	-----	1.235	CBCE-26F-30-2-NF
30-3-N	-----	1.235	CBCE-26F-30-3-NF

**Table 2.3-29B**  
**Extension Callouts**

Extension Callouts	E (Ref. Fig. 2.3-29) (inches)
4*	2.0
6	3.0

\* STDNs 20-2-N through 30-3-N are not available with an extension callout of "4."

Note: When ordering replacement jaws, add -JO to the assembly model number.

**2.3.29**  
**MEDIUM BRUTE**  
**EXTENSION**  
**NOSECAPS**

**See Table 2.3-29C**  
**MODULAR EXTENSION NOSECAP**  
**SUPERSEDED BY**

*Detailed Tooling*  
*Page 91*

- UNCONTROLLED IF PRINTED -

**2.3.29**  
**MB EXTENSION**  
**TO MODULAR**  
**NOSECAP**  
**CONVERSIONS**

**Table 2.3-29C**  
**Medium Brute CB**  
**Tooling Nosecaps**

Extension Nosecap	Modular Extension Nosecap
CBCE-26D-10-3-NF	MEN-26B-1023F
CBCE-26D-12-0-NF	MEN-26B-1201F
CBCE-26D-12-1-NF	MEN-26B-1201F
CBCE-26D-12-2-NF	MEN-26B-1223F
CBCE-26D-12-3-NF	MEN-26B-1223F
CBCE-26D-14-0-NF	MEN-26B-1401F
CBCE-26D-14-1-NF	MEN-26B-1401F
CBCE-26D-14-2-NF	MEN-26B-1423F
CBCE-26D-14-3-NF	MEN-26B-1423F
CBCE-26D-16-0-NF	MEN-26B-1601F
CBCE-26D-16-1-NF	MEN-26B-1601F
CBCE-26D-16-2-NF	MEN-26B-1623F
CBCE-26D-16-3-NF	MEN-26B-1623F
CBCE-26D-18-0-NF	MEN-26B-1801F
CBCE-26D-18-1-NF	MEN-26B-1801F
CBCE-26D-18-2-NF	MEN-26B-1823F
CBCE-26D-18-3-NF	MEN-26B-1823F
CBCE-26D-20-0-NF	MEN-26B-2001F
CBCE-26D-20-1-NF	MEN-26B-2001F
CBCE-26E-20-2-NF	MEN-26C-2023F
CBCE-26E-20-3-NF	MEN-26C-2023F
CBCE-26E-22-0-NF	MEN-26C-2201F
CBCE-26E-22-1-NF	MEN-26C-2201F
CBCE-26E-22-2-NF	MEN-26C-2223F
CBCE-26E-22-3-NF	MEN-26C-2223F
CBCE-26E-24-0-NF	MEN-26C-2401F
CBCE-26E-24-1-NF	MEN-26C-2401F
CBCE-26E-24-2-NF	MEN-26C-2423F
CBCE-26E-24-3-NF	MEN-26C-2423F
CBCE-26E-26-0-NF	MEN-26C-2601F
CBCE-26E-26-1-NF	MEN-26C-2601F
CBCE-26E-26-2-NF	MEN-26C-2623F
CBCE-26E-26-3-NF	MEN-26C-2623F
CBCE-26F-28-0-NF	MEN-26C-2801F
CBCE-26F-28-1-NF	MEN-26C-2801F
CBCE-26F-28-2-NF	MEN-26C-2823F
CBCE-26F-28-3-NF	MEN-26C-2823F
CBCE-26F-30-0-NF	MEN-26C-3001F
CBCE-26F-30-1-NF	MEN-26C-3001F
CBCE-26F-30-2-NF	MEN-26D-3023F
CBCE-26F-30-3-NF	MEN-26D-3023F

*Detailed Tooling*  
*Page 92*

- UNCONTROLLED IF PRINTED -



**2.3.30**  
**BIG BRUTE**  
**EXTENSION**  
**NOSECAPS**


**Table 2.3-30**  
**Big Brute Extension Nosecap**

CB Tooling STDN Range	A Diameter (Ref. Fig. 2.3-30) (inch)	Assembly Model Number
28-0-N to 28-1-N	1.205	CBCE-2801F-3-6
28-2-N to 28-3-N	1.216	CBCE-2823F-3-6
30-0-N to 30-1-N	1.275	CBCE-3001F-3-6
30-2-N to 30-3-N	1.302	CBCE-3023F-3-6
32-0-N to 32-1-N	1.336	CBCE-3201F-3-6
32-2-N to 32-3-N	1.369	CBCE-3223F-3-6
34-0-N to 34-1-N	1.395	CBCE-3401F-3-6
34-2-N to 34-3-N	1.423	CBCE-3423F-3-6
36-0-N to 36-1-N	1.451	CBCE-3601F-3-6
36-2-N to 36-3-N	1.483	CBCE-3623F-3-6
38-0-N to 38-1-N	1.505	CBCE-3801F-3-6
38-2-N to 38-3-N	1.546	CBCE-3823F-3-6
40-0-N to 40-1-N	1.581	CBCE-4001F-3-6
40-2-N to 40-3-N	1.611	CBCE-4023F-3-6
42-0-N to 42-1-N	1.640	CBCE-4201F-3-6
42-2-N to 42-3-N	1.669	CBCE-4223F-3-6
44-0-N to 44-1-N	1.700	CBCE-4401F-3-6
44-2-N to 44-3-N	1.732	CBCE-4423F-3-6
46-0-N to 46-1-N	1.757	CBCE-4601F-3-6
46-2-N to 46-3-N	1.785	CBCE-4623F-3-6
48-0-N to 48-1-N	1.814	CBCE-4801F-3-6
48-2-N to 48-3-N	1.846	CBCE-4823F-3-6
50-0-N to 50-1-N	1.885	CBCE-5001F-3-6
50-2-N to 50-3-N	1.912	CBCE-5023F-3-6
52-0-N to 52-1-N	1.955	CBCE-5201F-3-6
52-2-N to 52-3-N	1.978	CBCE-5223F-3-6
54-0-N to 54-1-N	2.014	CBCE-5401F-3-6
54-2-N to 54-3-N	2.045	CBCE-5423F-3-6
56-0-N to 56-1-N	2.076	CBCE-5601F-3-6
56-2-N to 56-3-N	2.108	CBCE-5623F-3-6

*Detailed Tooling*  
*Page 94*

- UNCONTROLLED IF PRINTED -

## 2.3.31 LITTLE BRUTE FLUSH NOSECAP ASSEMBLIES

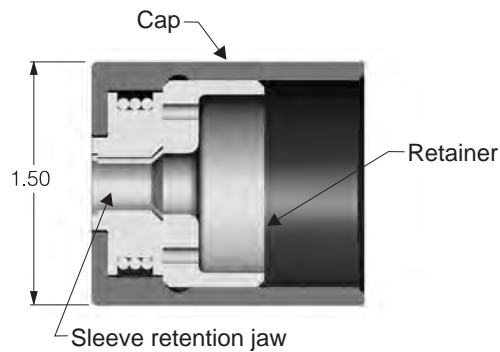


**Figure 2.3-31**  
**Flush Nosecap Assembly**

- Designed to hold the split sleeve in the hole during puller operation and to transfer the reactive forces from the puller to the workpiece.
- Consists of a three-part assembly including a cap, sleeve retention jaw set, and a retainer.
- Used where access restricts length of puller/nosecap assembly.
- Configurations are available for use with either flared or straight sleeves.
- Each nosecap or jaw size covers the nominal hole diameter and its associated over-sizes.
- Replacement jaw sets can be ordered separately.
- Identification is provided by an electroetched model number.

**Table 2.3-31**  
**Little Brute Flush Nosecap Assemblies**  
**CB, KB2, and CA Tooling**

CB Tooling STDN Range	KB2 Tooling STDN Range	CA Tooling STDN Range	Assembly Model Number	Replacement Jaw Model Number
4-0-N to 4-4-N	40-****-0 to 43-****-0	20 to 30	CBC-11-04F	CBC-10-04F
4-4-N to 6-3-N	43-****-0 to 63-****-0	30 to 40	CBC-11-06F	CBC-10-06F
6-3-N to 8-3-N	63-****-0 to 83-****-0	40 to 50	CBC-11-08F	CBC-10-08F
8-3-N to 10-3-N	83-****-0 to 103-****-0	50 to 53	CBC-11-10F	CBC-10-10F
10-3-N to 12-3-N	103-****-0 to 123-****-0	-----	CBC-12-12F	CBC-10-12F
12-3-N to 14-3-N	123-****-0	-----	CBC-12-14F	CBC-10-14F
14-3-N to 16-3-N	-----	-----	CBC-13-16F	CBC-10-16F

**Model Number Key:**

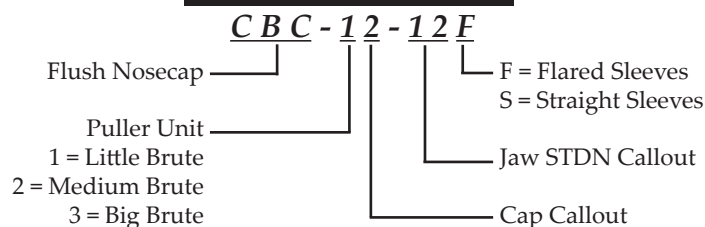

*Detailed Tooling*  
*Page 95*

- UNCONTROLLED IF PRINTED -

**2.3.32**  
**MEDIUM AND**  
**BIG BRUTE**  
**FLUSH**  
**NOSECAP**  
**ASSEMBLIES**

**Table 2.3-32A**  
**Medium Brute Flush Nosecap Assemblies**  
**CB and CA Tooling**

CB Tooling STDN Range	CA Tooling STDN Range	Assembly Model Number	Replacement Jaw Model Number
10-3-N to 12-3-N	60 to 70	*CBC-22-12F	CBC-20-12F
14-0-N to 14-3-N	70 to 80	*CBC-22-14F	CBC-20-14F
16-0-N to 16-3-N	80 to 90	*CBC-23-16F	CBC-20-16F
18-0-N to 18-3-N	90 to 100	*CBC-23-18F	CBC-20-18F
20-0-N to 20-3-N	100 to 103	*CBC-23-20F	CBC-20-20F
22-0-N to 22-3-N	103 to 111	*CBC-24-22F	CBC-20-22F
24-0-N to 24-3-N	-----	*CBC-24-24F	CBC-20-24F
26-0-N to 26-3-N	-----	*CBC-24-26F	CBC-20-26F
28-0-N to 28-3-N	-----	*CBC-25-28F	CBC-20-28F
30-0-N to 30-3-N	-----	*CBC-25-30F	CBC-20-30F

\* These nose caps can cover one oversize smaller, e.g., STDN 20-3-N can be used with CBC-24-22F




**Figure 2.3-32**  
**Medium/Big Brute**  
**Flush Nosecap**

**Table 2.3-32B**  
**Big Brute Flush Nosecap**  
**Assemblies CB Tooling**

CB Tooling STDN Range	Assembly Model Number	Replacement Jaw Model Number
30-0-N to 30-3-N	CBC-31-30F	CBC-30-30F
32-0-N to 32-3-N	CBC-31-32F	CBC-30-32F
34-0-N to 34-3-N	CBC-31-34F	CBC-30-34F
36-0-N to 36-3-N	CBC-31-36F	CBC-30-36F
38-0-N to 38-3-N	*CBC-31-38F	CBC-30-38F
40-0-N to 40-3-N	*CBC-31-40F	CBC-30-40F
42-0-N to 42-3-N	*CBC-32-42F	CBC-30-42F
44-0-N to 44-3-N	*CBC-32-44F	CBC-30-44F
46-0-N to 46-3-N	*CBC-32-46F	CBC-30-46F
48-0-N to 48-3-N	*CBC-32-48F	CBC-30-48F
50-0-N to 50-3-N	*CBC-33-50F	CBC-30-50F
52-0-N to 52-3-N	*CBC-33-52F	CBC-30-52F
54-0-N to 54-3-N	*CBC-33-54F	CBC-30-54F
56-0-N to 56-3-N	*CBC-33-56F	CBC-30-56F
58-0-N to 58-3-N	*CBC-34-58F	CBC-30-58F
60-0-N to 60-3-N	*CBC-34-60F	CBC-30-60F
62-0-N to 62-3-N	*CBC-34-62F	CBC-30-62F
64-0-N to 64-3-N	*CBC-35-64F	CBC-30-64F
66-0-N to 66-3-N	*CBC-35-66F	CBC-30-66F
68-0-N to 68-3-N	*CBC-35-68F	CBC-30-68F
70-0-N to 70-3-N	*CBC-35-70F	CBC-30-70F

\* These nose caps can cover one oversize smaller, e.g., STDN 36-3-N can be used with CBC-31-38F.

## 2.3.33 LITTLE BRUTE COUNTERSINK NOSECAP ASSEMBLIES

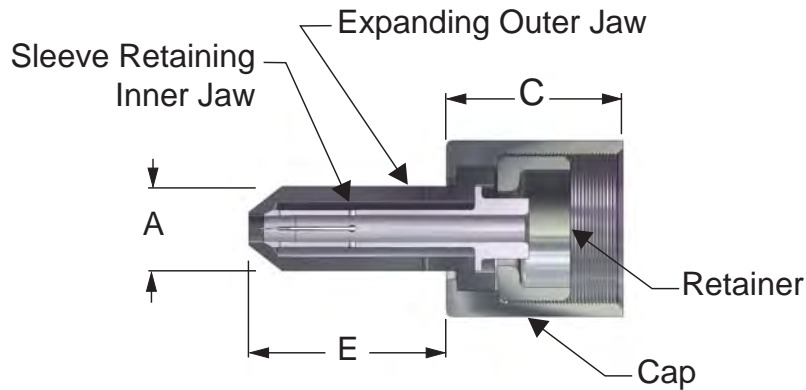

**Figure 2.3-33**  
**Little Brute Countersink (CsCx) Nosecap Assembly**

- The FTI patented countersink nose cap assemblies permit the simultaneous cold expansion of the straight and countersunk portions of pre-countersunk holes.
- Designed to hold the split sleeve in the hole during puller operation and to concurrently transfer the reactive forces from the puller into the countersink portion of the workpiece.
- Used for cold expansion of 3/16 through 27/64 inch 100-degree countersunk holes in aluminum alloys, using Little Brute Puller (Tables 2.3-35A and 2.3-35B).
- Multi-material stackups may be cold expanded using the CsCx nose cap assembly provided the countersink portion of the hole is in the aluminum part of the stackup.
- Consists of a four-part assembly including cap, retainer, sleeve retaining (inner) jaw, and expanding (outer) jaw which extends approximately 1-5/8 inches from the face of the cap for the Little Brute Puller (Figure 2.3-33).
- Replacement inner and outer jaws are available. Please contact our Sales department for more information.

**Table 2.3-33**  
**Little Brute Countersink (CsCx) Nosecap Assembly**

Puller Unit	Ref. A Jaw Diameter	Ref. C Cap Length	Ref. E Jaw Length
Little Brute	0.78	1.50	1.69

**Model Number Key:**

***K B C - 0 6 3 - 1A***

CsCx Nosecap  
Assembly


Size Code

1A = Little Brute  
100° Countersink Callout

*Detailed Tooling*  
*Page 97*

- UNCONTROLLED IF PRINTED -

## 2.3.34 MEDIUM BRUTE COUNTERSINK NOSECAP ASSEMBLIES

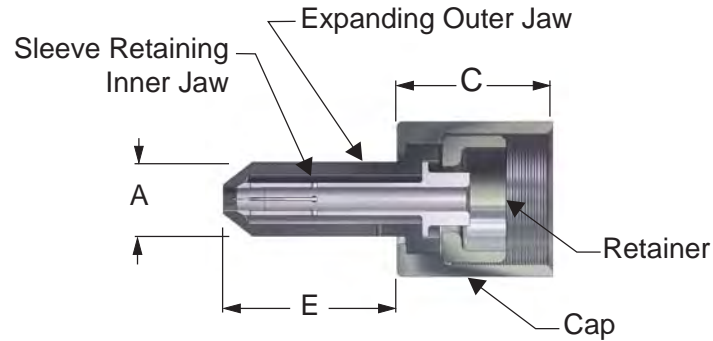

**Figure 2.3-34**  
**Medium Brute CsCx Nosecap Assembly**

- The FTI patented countersink nose cap assemblies permit the simultaneous cold expansion of the straight and countersunk portions of pre-countersunk holes.
- Designed to hold the split sleeve in the hole during puller operation and to concurrently transfer the reactive forces from the puller into the countersink portion of the workpiece.
- Used for cold expansion of 3/16 through 27/64-inch 100-degree countersunk holes in aluminum alloys, using Medium Brute Puller (Table 2.3-35C).
- Multi-material stackups may be cold expanded using the CsCx nose cap assembly provided the countersink portion of the hole is in the aluminum part of the stackup.
- Consists of a four-part assembly including cap, retainer, sleeve retaining (inner) jaw, and expanding (outer) jaw that extends 1-5/8 inches from the face of the cap for the Medium Brute Puller (Figure 2.3-34).
- Replacement inner and outer jaws are available. Please contact our Customer Service Department for more information.

**Table 2.3-34**  
**Medium Brute CsCx Nosecap Assembly**

Puller Unit	Ref. A Jaw Diameter	Ref. C Cap Length	Ref. E Jaw Length
Medium Brute	1.23	2.37	1.89

**Model Number Key:**

***K B C - 1 4 0 - 2A***

CsCx Nosecap  
Assembly

Size Code

2A = Medium Brute  
100° Countersink Callout

*Detailed Tooling*  
*Page 98*

\*\*\*\* Refer to Cx2s Tooling for complete STDN information.

- UNCONTROLLED IF PRINTED -

**Table 2.3-35A**  
**Countersink Nosecap**  
**Assembly KB and KB2 Tooling**  
**For Use with Little Brute**

KB Tooling	KB2 Tooling	Assembly Model Number
4-0-N	-----	KBC-040-1A
4-1-N	-----	KBC-041-1A
4-2-N	-----	KBC-042-1A
4-3-N	-----	KBC-043-1A
4-4-N	-----	KBC-044-1A
6-0-N	60-****-0	KBC-060-1A
6-1-N	61-****-0	KBC-061-1A
6-2-N	62-****-0	KBC-062-1A
6-3-N	63-****-0	KBC-063-1A
8-0-N	80-****-0	KBC-080-1A
8-1-N	81-****-0	KBC-081-1A
8-2-N	82-****-0	KBC-082-1A
8-3-N	83-****-0	KBC-083-1A
10-0-N	100-****-0	KBC-100-1A
10-1-N	101-****-0	KBC-101-1A
10-2-N	102-****-0	KBC-102-1A
10-3-N	103-****-0	KBC-103-1A
12-0-N	120-****-0	KBC-120-1A
12-1-N	121-****-0	KBC-121-1A
12-2-N	122-****-0	KBC-122-1A
12-3-N	123-****-0	KBC-123-1A

\*\*\*\* Refer to Cx2s tooling for complete STDN information.

**Table 2.3-35B**  
**LB CsCx Nosecap**  
**Assemblies for**  
**CR Tooling**

CR Tooling	Assembly Model Number
R30	KRC-R30-1A
R32	KRC-R32-1A
R40	KRC-R40-1A
R42	KRC-R42-1A
R50	KRC-R50-1A
R52	KRC-R52-1A
R60	KRC-R60-1A
R62	KRC-R62-1A


**Table 2.3-35C**  
**MB CsCx Nosecap**  
**Assemblies for**  
**CB Tooling**

CR Tooling	Assembly Model Number
14-0-N	KBC-140-2A
14-1-N	KBC-141-2A
14-2-N	KBC-142-2A
14-3-N	KBC-143-2A
16-0-N	KBC-160-2A
16-1-N	KBC-161-2A
16-2-N	KBC-162-2A
16-3-N	KBC-163-2A
18-0-N	KBC-180-2A
18-1-N	KBC-181-2A
18-2-N	KBC-182-2A
18-3-N	KBC-183-2A
20-0-N	KBC-200-2A
20-1-N	KBC-201-2A
20-2-N	KBC-202-2A
20-3-N	KBC-203-2A


## 2.3.35 COUNTERSINK NOSECAP ASSEMBLIES

**2.3.36  
OFFSET  
ADAPTER  
FLUSH  
NOSECAPS**


**Figure 2.3-36A  
LBOA and HOA  
Flush Nosecaps**

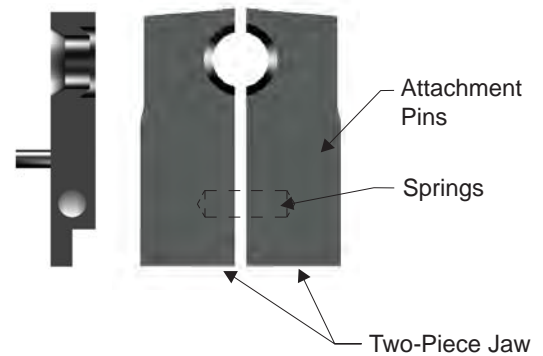

**Figure 2.3-36B  
MBOA Flush Nosecaps**

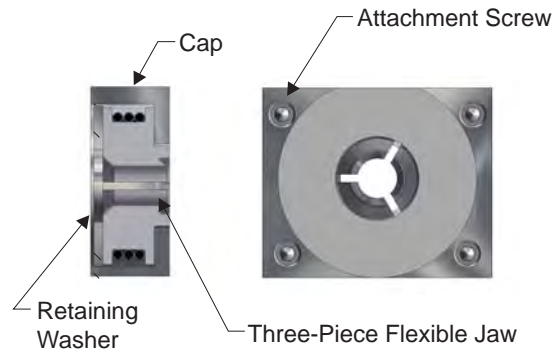

**Figure 2.3-36C  
MBHO Flush Nosecaps**

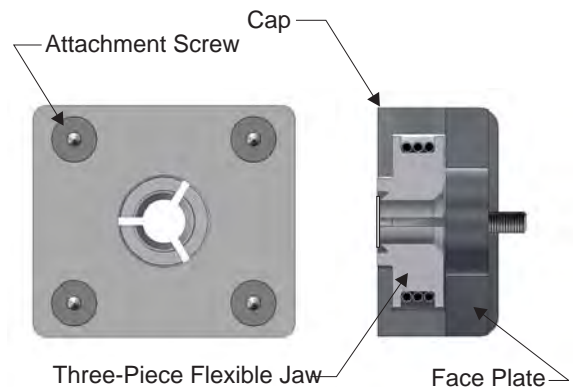

- Designed to hold the split sleeve in the hole during puller operation and to transfer the reactive forces from the puller to the workpiece in restricted access areas.
- The LBOA and the HOA nose caps consist of a two-part set which is spring loaded against the minor diameter of the mandrel.
- The LBOA and HOA jaws use flared sleeves.
- The MBOA and MBHO nose caps use both flared and straight sleeves. See Table 2.3-36C.
- Identification is provided by an electroetched model number.
- For other sizes, please contact our Sales Staff.

**Table 2.3-36A**  
**LBOA and HOA Flush Nosecaps**

CB Tooling	KB2 Tooling	CA Tooling	Jaw Model Number
4-0-N to 4-1-N	41-****-0 to 42-****-0	20 to 21	CBC-40-0401F
4-2-N to 4-3-N	43-****-0 to 61-****-0	22 to 23	CBC-40-0423F
4-4-N to 6-1-N	62-****-0 to 63-****-0	30 to 32	CBC-40-0601F
6-2-N to 6-3-N	80-****-0 to 81-****-0	33 to 40	CBC-40-0623F
8-0-N to 8-1-N	82-****-0 to 83-****-0	41 to 42	CBC-40-0801F
8-2-N to 8-3-N	100-****-0 to 101-****-0	<b>43 to 50</b>	CBC-40-0823F
10-0-N to 10-1-N	102-****-0 to 103-****-0	51 to 52	CBC-40-1001F
10-2-N to 10-3-N	120-****-0 to 121-****-0	53 to 60	CBC-40-1023F
12-0-N to 12-1-N	122-****-0 to 123-****-0	61 to 62	CBC-40-1201F
<b>12-2-N to 12-3-N</b>	-----	63 to 70	CBC-40-1223F
14-0-N to 14-1-N	-----	71 to 72	CBC-40-1401F
14-2-N to 14-3-N	-----	73 to 80	CBC-40-1423F
16-0-N to 16-1-N	-----	81 to 82	CBC-40-1601F
16-2-N to 16-3-N	-----	83 to 90	CBC-40-1623F

\*\*\*\* Refer to Cx2s Tooling for complete STDN information.  
Note: Bold STDN notes highest allowable HOA Standard Tool Diameter Number.

**Table 2.3-36B**  
**CR Tooling-LBOA Flush Nosecaps**

STDN	Nosecap Model Number	STDN	Nosecap Model Number
R30	CRC-R30-1	R50	CRC-R50-1
R32	CRC-R32-1	R52	CRC-R52-1
R40	CRC-R40-1	R60	CRC-R60-1
R42	CRC-R42-1	R62	CRC-R62-1

**Table 2.3-36C**  
**MBOA and MBHO Flush Nosecaps**

CB Tooling	CA Tooling	*MBOA Flush Nosecap Model Number	*MBHO Flush Nosecap Model Number	*Replacement Jaw Model Number
12-0-N to 12-3-N	60 to 70	CBC-52-12F	CBC-92-12F	CBC-20-12F
14-0-N to 14-3-N	70 to 80	CBC-52-14F	CBC-92-14F	CBC-20-14F
16-0-N to 16-3-N	80 to 90	CBC-53-16F	CBC-93-16F	CBC-20-16F
18-0-N to 18-3-N	90 to 100	CBC-53-18F	CBC-93-18F	CBC-20-18F
20-0-N to 20-3-N	100 to 103	CBC-53-20F	CBC-93-20F	CBC-20-20F
22-0-N to 22-3-N	103 to 111	CBC-54-22F	CBC-94-22F	CBC-20-22F
24-0-N to 24-3-N	-----	CBC-54-24F	CBC-94-24F	CBC-20-24F
26-0-N to 26-3-N	-----	CBC-54-26F	CBC-94-26F	CBC-20-26F
28-0-N to 28-3-N	-----	CBC-55-28F	CBC-95-28F	CBC-20-28F
30-0-N to 30-3-N	-----	CBC-55-30F	CBC-95-30F	CBC-20-30F
32-0-N to 32-3-N	-----	CBC-55-32F	CBC-95-32F	CBC-20-32F
34-0-N to 34-3-N	-----	CBC-55-34F	CBC-95-34F	CBC-20-34F
36-0-N to 36-3-N	-----	CBC-55-36F	CBC-95-36F	CBC-20-36F

\* Will work with either flared or straight sleeves.


- UNCONTROLLED IF PRINTED -

**2.3.36**  
**OFFSET**  
**ADAPTER**  
**FLUSH**  
**NOSECAPS**

*Detailed Tooling*  
*Page 101*


**2.3.37**  
**LITTLE BRUTE**  
**OFFSET**  
**ADAPTER**  
**EXTENSION**  
**NOSECAPS**

SUPERSEDED BY  
 MODULAR EXTENSION NOSECAP  
 See Table 2.3-37C

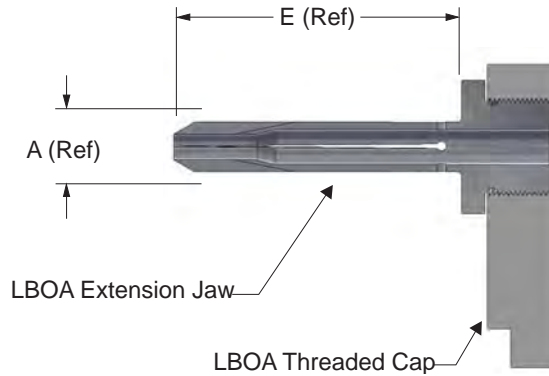

**Figure 2.3-37**  
**Little Brute Offset Adapter (LBOA) Extension Nosecap**

- Designed to hold the split sleeve in the hole during puller operation and to transfer the reactive forces from the puller to the workpiece.
- Consists of a two-piece assembly including a cap and a one-piece jaw set that extends two inches from the jaw flange.
- Replacement modular jaws can be ordered separately. See page 76.
- Other characteristics are similar to standard extension nosecaps.
- Flared sleeves are required.
- Identification is provided by an electroetched model number.
- Other lengths are available (E ref. Figure 2.3-37). Please contact our Customer Service Department.

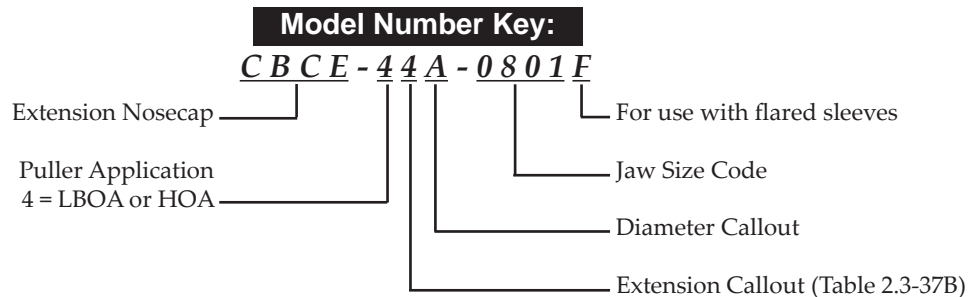

*Detailed Tooling*  
*Page 102*

- UNCONTROLLED IF PRINTED -

**Table 2.3-37A  
STDN Range**

CB Tooling	KB2 Tooling	CA Tooling	A (Ref. Fig. 2.3-37) (inch)	Jaw Model Number
4-0-N to 4-1-N	40-****-0 to 41-****-0	20 to 21	0.49	CBCE-44A-0401F
4-2-N to 4-3-N	42-****-0 to 43-****-0	22 to 23	0.49	CBCE-44A-0423F
4-4-N to 6-1-N	60-****-0 to 61-****-0	30 to 32	0.49	CBCE-44A-0601F
6-2-N to 6-3-N	62-****-0 to 63-****-0	32 to 33	0.49	CBCE-44A-0623F
8-0-N to 8-1-N	80-****-0 to 81-****-0	40 to 41	0.49	CBCE-44A-0801F
8-2-N to 8-3-N	82-****-0 to 83-****-0	42 to 43	0.49	CBCE-44A-0823F
10-0-N to 10-1-N	100-****-0 to 101-****-0	50 to 51	0.61	CBCE-44B-1001F
10-2-N to 10-3-N	102-****-0 to 103-****-0	52 to 53	0.61	CBCE-44B-1023F
12-0-N to 12-1-N	120-****-0 to 121-****-0	-----	0.61	CBCE-44B-1201F
12-2-N to 12-3-N	122-****-0 to 123-****-0	-----	0.61	CBCE-44B-1223F
14-0-N to 14-1-N	-----	-----	0.74	CBCE-44C-1401F
14-2-N to 14-3-N	-----	-----	0.74	CBCE-44C-1423F
16-0-N to 16-1-N	-----	-----	0.74	CBCE-44C-1601F
16-2-N to 16-3-N	-----	-----	0.74	CBCE-44C-1623F

**Table 2.3-37B  
Extension Callouts**

Extension Callouts	E (Ref. Fig. 2.3-40) (inch)
4	2.0
5	2.5
6	3.0

**2.3.37  
LITTLE BRUTE  
OFFSET  
ADAPTER  
EXTENSION  
NOSECAPS**

**SUPERSEDED BY  
MODULAR EXTENSION NOSECAP**

See Table 2.3-37C


*Detailed Tooling  
Page 103*

- UNCONTROLLED IF PRINTED -

**2.3.37**  
**LBOA**  
**EXTENSION**  
**TO MODULAR**  
**NOSECAP**  
**CONVERSIONS**

**Table 2.3-37C**  
**LBOA Nosecaps**

<b>Extension Nosecap</b>	<b>Modular Extension Nosecap</b>
CBCE-44A-0401F	MEN-44A-0401F
CBCE-44A-0423F	MEN-44A-0423F
CBCE-44A-0601F	MEN-44A-0601F
CBCE-44A-0623F	MEN-44A-0623F
CBCE-44A-0801F	MEN-44A-0801F
CBCE-44A-0823F	MEN-44A-0823F
CBCE-44B-1001F	MEN-44A-1001F
CBCE-44B-1023F	MEN-44A-1023F
CBCE-44B-1201F	MEN-44A-1201F
CBCE-44B-1223F	MEN-44A-1223F
CBCE-44C-1401F	MEN-44B-1401F
CBCE-44C-1423F	MEN-44B-1423F
CBCE-44C-1601F	MEN-44B-1601F
CBCE-44C-1623F	MEN-44B-1623F

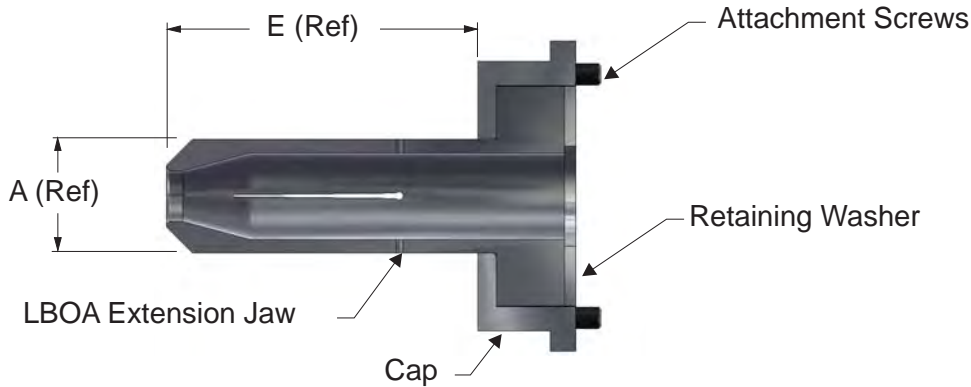

**Figure 2.3-38**  
**Medium Brute Offset Adapter (MBOA)**  
**Extension Nosecap**


- Designed to hold the split sleeve in the hole during puller operation and to transfer the reactive forces from the puller to the workpiece.
- For cold expanding holes in aluminum up to 15/16-inch diameter and up to 1/2-inch diameter in steel and titanium in restricted access areas.
- Consist of a three-piece assembly including a cap, a one-piece jaw set that extends from the front of the cap, and a retaining washer to hold the jaw in place.
- Replacement jaws can be ordered separately (see Table 2.3-38B).
- Identification is provided by an electroetched model number.
- Other sizes are available. Please contact our Sales Staff for information.

**Table 2.3-38A**  
**Extension Callout**

Extension Callouts	E (Ref. Fig. 2.3-38) (inch)
4	2.0
6	3.0
9	4.5

\* STDNs 20-2-N through 30-3-N are not available with a callout of "4."

**Model Number Key:**

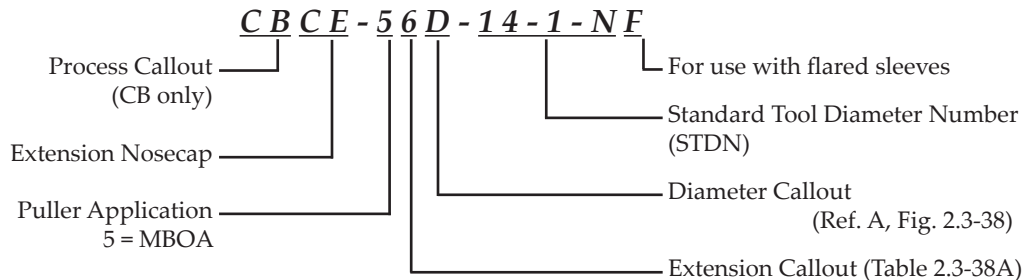

**2.3.38**  
**MEDIUM BRUTE**  
**OFFSET**  
**ADAPTER**  
**EXTENSION**  
**NOSECAPS**

SUPERSEDED BY  
 MODULAR EXTENSION NOSECAP  
 See Table 2.3-38C

*Detailed Tooling*  
 Page 105

- UNCONTROLLED IF PRINTED -

**2.3.38**  
**MEDIUM BRUTE**  
**OFFSET**  
**ADAPTER**  
**EXTENSION**  
**NOSECAPS**

SUPERSEDED BY  
 MODULAR EXTENSION NOSECAP  
 See Table 2.3-38C

**Table 2.3-38B**  
**MBOA Extension Nosecap Specifications**

CB Tooling	CA Tooling	A Diameter (Ref. Fig. 2.3-38) (inch)	Assembly Model Number	Replacement Jaw Model Number
10-3-N	60	0.86	CBCE-56D-10-3-NF	CBCE-26D-10-3-NF-JO
12-0-N	61	0.86	CBCE-56D-12-0-NF	CBCE-26D-12-0-NF-JO
12-1-N	62	0.86	CBCE-56D-12-1-NF	CBCE-26D-12-1-NF-JO
12-2-N	63	0.86	CBCE-56D-12-2-NF	CBCE-26D-12-2-NF-JO
12-3-N	70	0.86	CBCE-56D-12-3-NF	CBCE-26D-12-3-NF-JO
14-0-N	71	0.86	CBCE-56D-14-0-NF	CBCE-26D-14-0-NF-JO
14-1-N	72	0.86	CBCE-56D-14-1-NF	CBCE-26D-14-1-NF-JO
14-2-N	73	0.86	CBCE-56D-14-2-NF	CBCE-26D-14-2-NF-JO
14-3-N	80	0.86	CBCE-56D-14-3-NF	CBCE-26D-14-3-NF-JO
16-0-N	81	0.86	CBCE-56D-16-0-NF	CBCE-26D-16-0-NF-JO
16-1-N	82	0.86	CBCE-56D-16-1-NF	CBCE-26D-16-1-NF-JO
16-2-N	83	0.86	CBCE-56D-16-2-NF	CBCE-26D-16-2-NF-JO
16-3-N	90	0.86	CBCE-56D-16-3-NF	CBCE-26D-16-3-NF-JO
18-0-N	91	0.86	CBCE-56D-18-0-NF	CBCE-26D-18-0-NF-JO
18-1-N	92	0.86	CBCE-56D-18-1-NF	CBCE-26D-18-1-NF-JO
18-2-N	93	0.86	CBCE-56D-18-2-NF	CBCE-26D-18-2-NF-JO
18-3-N	100	0.86	CBCE-56D-18-3-NF	CBCE-26D-18-3-NF-JO
20-0-N	101	0.86	CBCE-56D-20-0-NF	CBCE-26D-20-0-NF-JO
20-1-N	102	0.86	CBCE-56D-20-1-NF	CBCE-26D-20-1-NF-JO
20-2-N	103	1.10	CBCE-56E-20-2-NF	CBCE-26E-20-2-NF-JO
20-3-N	110	1.10	CBCE-56E-20-3-NF	CBCE-26E-20-3-NF-JO
22-0-N	111	1.10	CBCE-56E-22-0-NF	CBCE-26E-22-0-NF-JO
22-1-N	-----	1.10	CBCE-56E-22-1-NF	CBCE-26E-22-1-NF-JO
22-2-N	-----	1.10	CBCE-56E-22-2-NF	CBCE-26E-22-2-NF-JO
22-3-N	-----	1.10	CBCE-56E-22-3-NF	CBCE-26E-22-3-NF-JO
24-0-N	-----	1.10	CBCE-56E-24-0-NF	CBCE-26E-24-0-NF-JO
24-1-N	-----	1.10	CBCE-56E-24-1-NF	CBCE-26E-24-1-NF-JO
24-2-N	-----	1.10	CBCE-56E-24-2-NF	CBCE-26E-24-2-NF-JO
24-3-N	-----	1.10	CBCE-56E-24-3-NF	CBCE-26E-24-3-NF-JO
26-0-N	-----	1.10	CBCE-56E-26-0-NF	CBCE-26E-26-0-NF-JO
26-1-N	-----	1.10	CBCE-56E-26-1-NF	CBCE-26E-26-1-NF-JO
26-2-N	-----	1.10	CBCE-56E-26-2-NF	CBCE-26E-26-2-NF-JO
26-3-N	-----	1.10	CBCE-56E-26-3-NF	CBCE-26E-26-3-NF-JO
28-0-N	-----	1.10	CBCE-56E-28-0-NF	CBCE-26E-28-0-NF-JO
28-1-N	-----	1.23	CBCE-56F-28-1-NF	CBCE-26F-28-1-NF-JO
28-2-N	-----	1.23	CBCE-56F-28-2-NF	CBCE-26F-28-2-NF-JO
28-3-N	-----	1.23	CBCE-56F-28-3-NF	CBCE-26F-28-3-NF-JO
30-0-N	-----	1.23	CBCE-56F-30-0-NF	CBCE-26F-30-0-NF-JO
30-1-N	-----	1.23	CBCE-56F-30-1-NF	CBCE-26F-30-1-NF-JO
30-2-N	-----	1.23	CBCE-56F-30-2-NF	CBCE-26F-30-2-NF-JO
30-3-N	-----	1.23	CBCE-56F-30-3-NF	CBCE-26F-30-3-NF-JO

- UNCONTROLLED IF PRINTED -

Detailed Tooling  
 Page 106

**Table 2.3-38C**  
**MBOA Extension Nosecaps**

Extension Nosecap	Modular Extension Nosecap
CBCE-56D-10-3-NF	MEN-56B-1023F
CBCE-56D-12-0-NF	MEN-56B-1201F
CBCE-56D-12-1-NF	MEN-56B-1201F
CBCE-56D-12-2-NF	MEN-56B-1223F
CBCE-56D-12-3-NF	MEN-56B-1223F
CBCE-56D-14-0-NF	MEN-56B-1401F
CBCE-56D-14-1-NF	MEN-56B-1401F
CBCE-56D-14-2-NF	MEN-56B-1423F
CBCE-56D-14-3-NF	MEN-56B-1423F
CBCE-56D-16-0-NF	MEN-56B-1601F
CBCE-56D-16-1-NF	MEN-56B-1601F
CBCE-56D-16-2-NF	MEN-56B-1623F
CBCE-56D-16-3-NF	MEN-56B-1623F
CBCE-56D-18-0-NF	MEN-56B-1801F
CBCE-56D-18-1-NF	MEN-56B-1801F
CBCE-56D-18-2-NF	MEN-56B-1823F
CBCE-56D-18-3-NF	MEN-56B-1823F
CBCE-56D-20-0-NF	MEN-56B-2001F
CBCE-56D-20-1-NF	MEN-56B-2001F
CBCE-56E-20-2-NF	MEN-56C-2023F
CBCE-56E-20-3-NF	MEN-56C-2023F
CBCE-56E-22-0-NF	MEN-56C-2201F
CBCE-56E-22-1-NF	MEN-56C-2201F
CBCE-56E-22-2-NF	MEN-56C-2223F
CBCE-56E-22-3-NF	MEN-56C-2223F
CBCE-56E-24-0-NF	MEN-56C-2401F
CBCE-56E-24-1-NF	MEN-56C-2401F
CBCE-56E-24-2-NF	MEN-56C-2423F
CBCE-56E-24-3-NF	MEN-56C-2423F
CBCE-56E-26-0-NF	MEN-56C-2601F
CBCE-56E-26-1-NF	MEN-56C-2601F
CBCE-56E-26-2-NF	MEN-56C-2623F
CBCE-56E-26-3-NF	MEN-56C-2623F
CBCE-56E-28-0-NF	MEN-56C-2801F
CBCE-56F-28-1-NF	MEN-56C-2801F
CBCE-56F-28-2-NF	MEN-56C-2823F
CBCE-56F-28-3-NF	MEN-56C-2823F
CBCE-56F-30-0-NF	MEN-56C-3001F
CBCE-56F-30-1-NF	MEN-56C-3001F
CBCE-56F-30-2-NF	MEN-56D-3023F
CBCE-56F-30-3-NF	MEN-56D-3023F


**2.3.38**  
**MBOA**  
**EXTENSION**  
**TO MODULAR**  
**NOSECAP**  
**CONVERSIONS**

*Detailed Tooling*  
*Page 107*

- UNCONTROLLED IF PRINTED -

**2.3.39**  
**MEDIUM BRUTE**  
**HYDRAULIC**  
**OFFSET**  
**EXTENSION**  
**NOSECAPS**

SUPERSEDED BY  
 MODULAR EXTENSION NOSECAP  
 See Table 2.3-39C

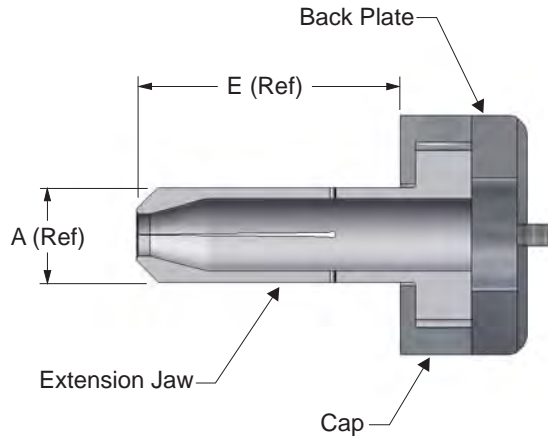

**Figure 2.3-39**  
**MBHO Extension Nosecap**


- Designed to hold the split sleeve in the hole during puller operation and to transfer the reactive forces from the puller to the workpiece.
- Capable of cold expanding holes in aluminum and mild steel up to 15/16-inch diameter and up to 1/2-inch diameter in steel and titanium in restricted access areas.
- Consists of a three-piece assembly including a cap, a one-piece jaw that extends from the front of the cap, and a back plate that holds the jaw to the puller unit.
- Replacement extension jaws can be ordered separately (see Table 2.3-39B).
- Identification is provided by an electroetched model number.
- Other sizes are available. Please contact our Sales Staff for information.

**Table 2.3-39A**  
**Extension Callout**

Extension Callouts	E (Ref. Fig. 2.3-39) (inch)
*4	2.0
6	3.0
9	4.5

\* STDNs 20-2-N through 30-3-N are not available with a callout of "4."

**Model Number Key:**

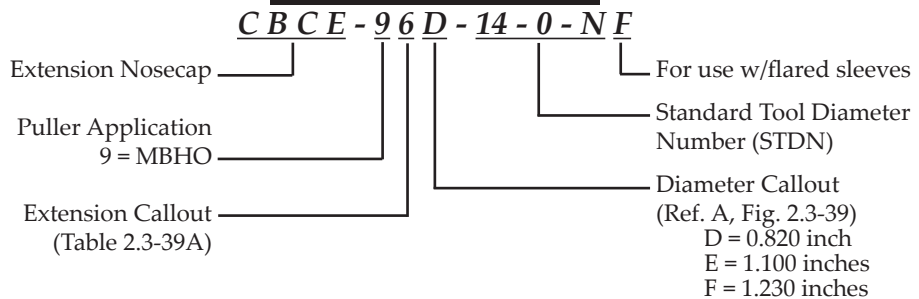

Detailed Tooling  
 Page 108

- UNCONTROLLED IF PRINTED -

**Table 2.3-39B  
STDN Range**

CB Tooling	CA Tooling	A Diameter (Ref. Fig. 2.3-39) (inch)	Assembly Model Number	Replacement Jaw Model Number
10-3-N	60	0.86	CBCE-96D-10-3-NF	CBCE-26D-10-3-NF-JO
12-0-N	61	0.86	CBCE-96D-12-0-NF	CBCE-26D-12-0-NF-JO
12-1-N	62	0.86	CBCE-96D-12-1-NF	CBCE-26D-12-1-NF-JO
12-2-N	63	0.86	CBCE-96D-12-2-NF	CBCE-26D-12-2-NF-JO
12-3-N	70	0.86	CBCE-96D-12-3-NF	CBCE-26D-12-3-NF-JO
14-0-N	71	0.86	CBCE-96D-14-0-NF	CBCE-26D-14-0-NF-JO
14-1-N	72	0.86	CBCE-96D-14-1-NF	CBCE-26D-14-1-NF-JO
14-2-N	73	0.86	CBCE-96D-14-2-NF	CBCE-26D-14-2-NF-JO
14-3-N	80	0.86	CBCE-96D-14-3-NF	CBCE-26D-14-3-NF-JO
16-0-N	81	0.86	CBCE-96D-16-0-NF	CBCE-26D-16-0-NF-JO
16-1-N	82	0.86	CBCE-96D-16-1-NF	CBCE-26D-16-1-NF-JO
16-2-N	83	0.86	CBCE-96D-16-2-NF	CBCE-26D-16-2-NF-JO
16-3-N	90	0.86	CBCE-96D-16-3-NF	CBCE-26D-16-3-NF-JO
18-0-N	91	0.86	CBCE-96D-18-0-NF	CBCE-26D-18-0-NF-JO
18-1-N	92	0.86	CBCE-96D-18-1-NF	CBCE-26D-18-1-NF-JO
18-2-N	93	0.86	CBCE-96D-18-2-NF	CBCE-26D-18-2-NF-JO
18-3-N	100	0.86	CBCE-96D-18-3-NF	CBCE-26D-18-3-NF-JO
20-0-N	101	0.86	CBCE-96D-20-0-NF	CBCE-26D-20-0-NF-JO
20-1-N	102	0.86	CBCE-96D-20-1-NF	CBCE-26D-20-1-NF-JO
20-2-N	103	1.10	CBCE-96E-20-2-NF	CBCE-26E-20-2-NF-JO
20-3-N	110	1.10	CBCE-96E-20-3-NF	CBCE-26E-20-3-NF-JO
22-0-N	111	1.10	CBCE-96E-22-0-NF	CBCE-26E-22-0-NF-JO
22-1-N	-----	1.10	CBCE-96E-22-1-NF	CBCE-26E-22-1-NF-JO
22-2-N	-----	1.10	CBCE-96E-22-2-NF	CBCE-26E-22-2-NF-JO
22-3-N	-----	1.10	CBCE-96E-22-3-NF	CBCE-26E-22-3-NF-JO
24-0-N	-----	1.10	CBCE-96E-24-0-NF	CBCE-26E-24-0-NF-JO
24-1-N	-----	1.10	CBCE-96E-24-1-NF	CBCE-26E-24-1-NF-JO
24-2-N	-----	1.10	CBCE-96E-24-2-NF	CBCE-26E-24-2-NF-JO
24-3-N	-----	1.10	CBCE-96E-24-3-NF	CBCE-26E-24-3-NF-JO
26-0-N	-----	1.10	CBCE-96E-26-0-NF	CBCE-26E-26-0-NF-JO
26-1-N	-----	1.10	CBCE-96E-26-1-NF	CBCE-26E-26-1-NF-JO
26-2-N	-----	1.10	CBCE-96E-26-2-NF	CBCE-26E-26-2-NF-JO
26-3-N	-----	1.10	CBCE-96E-26-3-NF	CBCE-26E-26-3-NF-JO
28-0-N	-----	1.10	CBCE-96E-28-0-NF	CBCE-26E-28-0-NF-JO
28-1-N	-----	1.23	CBCE-96F-28-1-NF	CBCE-26F-28-1-NF-JO
28-2-N	-----	1.23	CBCE-96F-28-2-NF	CBCE-26F-28-2-NF-JO
28-3-N	-----	1.23	CBCE-96F-28-3-NF	CBCE-26F-28-3-NF-JO
30-0-N	-----	1.23	CBCE-96F-30-0-NF	CBCE-26F-30-0-NF-JO
30-1-N	-----	1.23	CBCE-96F-30-1-NF	CBCE-26F-30-1-NF-JO
30-2-N	-----	1.23	CBCE-96F-30-2-NF	CBCE-26F-30-2-NF-JO
30-3-N	-----	1.23	CBCE-96F-30-3-NF	CBCE-26F-30-3-NF-JO

**2.3.39  
MEDIUM BRUTE  
HYDRAULIC  
OFFSET  
EXTENSION  
NOSECAPS**

**See Table 2.3-39C**  
**SUPERSEDED BY**  
**MODULAR EXTENSION NOSECAP**

*Detailed Tooling  
Page 109*

- UNCONTROLLED IF PRINTED -


**2.3.39  
MHBO  
EXTENSION  
TO MODULAR  
NOSECAP  
CONVERSIONS**

**Table 2.3-39C  
MBHO Modular Nosecaps**

Extension Nosecap	Modular Extension Nosecap
CBCE-96D-10-3-NF	MEN-96B-1023F
CBCE-96D-12-0-NF	MEN-96B-1201F
CBCE-96D-12-1-NF	MEN-96B-1201F
CBCE-96D-12-2-NF	MEN-96B-1223F
CBCE-96D-12-3-NF	MEN-96B-1223F
CBCE-96D-14-0-NF	MEN-96B-1401F
CBCE-96D-14-1-NF	MEN-96B-1401F
CBCE-96D-14-2-NF	MEN-96B-1423F
CBCE-96D-14-3-NF	MEN-96B-1423F
CBCE-96D-16-0-NF	MEN-96B-1601F
CBCE-96D-16-1-NF	MEN-96B-1601F
CBCE-96D-16-2-NF	MEN-96B-1623F
CBCE-96D-16-3-NF	MEN-96B-1623F
CBCE-96D-18-0-NF	MEN-96B-1801F
CBCE-96D-18-1-NF	MEN-96B-1801F
CBCE-96D-18-2-NF	MEN-96B-1823F
CBCE-96D-18-3-NF	MEN-96B-1823F
CBCE-96D-20-0-NF	MEN-96B-2001F
CBCE-96D-20-1-NF	MEN-96B-2001F
CBCE-96E-20-2-NF	MEN-96C-2023F
CBCE-96E-20-3-NF	MEN-96C-2023F
CBCE-96E-22-0-NF	MEN-96C-2201F
CBCE-96E-22-1-NF	MEN-96C-2201F
CBCE-96E-22-2-NF	MEN-96C-2223F
CBCE-96E-22-3-NF	MEN-96C-2223F
CBCE-96E-24-0-NF	MEN-96C-2401F
CBCE-96E-24-1-NF	MEN-96C-2401F
CBCE-96E-24-2-NF	MEN-96C-2423F
CBCE-96E-24-3-NF	MEN-96C-2423F
CBCE-96E-26-0-NF	MEN-96C-2601F
CBCE-96E-26-1-NF	MEN-96C-2601F
CBCE-96E-26-2-NF	MEN-96C-2623F
CBCE-96E-26-3-NF	MEN-96C-2623F
CBCE-96E-28-0-NF	MEN-96C-2801F
CBCE-96F-28-1-NF	MEN-96C-2801F
CBCE-96F-28-2-NF	MEN-96C-2823F
CBCE-96F-28-3-NF	MEN-96C-2823F
CBCE-96F-30-0-NF	MEN-96C-3001F
CBCE-96F-30-1-NF	MEN-96C-3001F
CBCE-96F-30-2-NF	MEN-96D-3023F
CBCE-96F-30-3-NF	MEN-96D-3023F

*Detailed Tooling  
Page 110*

- UNCONTROLLED IF PRINTED -

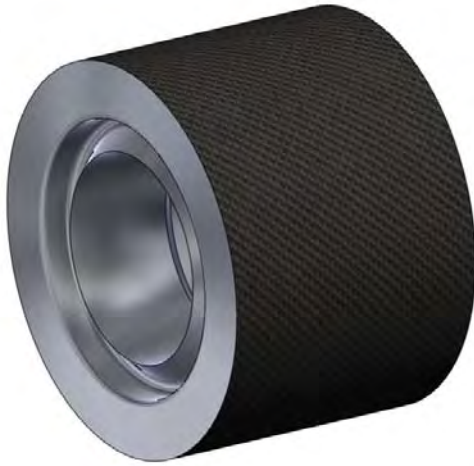

**Figure 2.3-40**  
**Right-Angle Puller Nosecap**

- For cold expansion of holes with access restrictions such as drain holes, holes in pockets, and other areas with limited front-side access.
- Capable of cold expanding up to 3/8-inch diameter holes in aluminum and 1/4-inch diameter holes in steel or titanium. Stackup capability of up to 0.8 inch, depending on material.
- Can be used for all FTI processes.

**Table 2.3-40**  
**Right Angle Puller**  
**Nosecap Selection**

STDN	Nosecap Model Number
4-0-N	CBC-70-040F
4-1-N	CBC-70-041F
4-2-N	CBC-70-042F
4-3-N	CBC-70-043F
4-4-N	CBC-70-044F
6-0-N	CBC-70-060F
6-1-N	CBC-70-061F
6-2-N	CBC-70-062F
6-3-N	CBC-70-063F
8-0-N	CBC-70-080F
8-1-N	CBC-70-081F
8-2-N	CBC-70-082F
8-3-N	CBC-70-083F
10-0-N	CBC-70-100F
10-1-N	CBC-70-101F
10-2-N	CBC-70-102F
10-3-N	CBC-70-103F
12-0-N	CBC-70-120F
12-1-N	CBC-70-121F
12-2-N	CBC-70-122F
12-3-N	CBC-70-123F


## 2.3.40

### RIGHT ANGLE


### PULLER

### NOSECAP

**Model Number Key:**


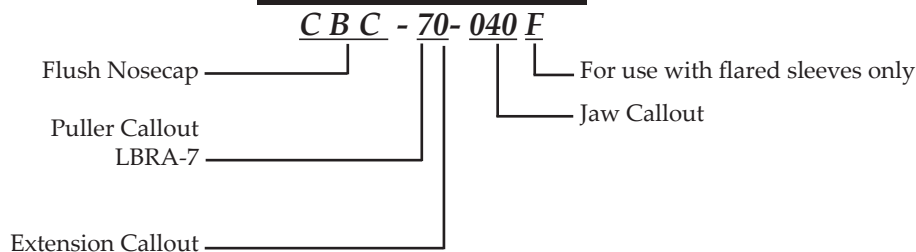


**2.4**  
**EXPENDABLE**  
**TOOLING**

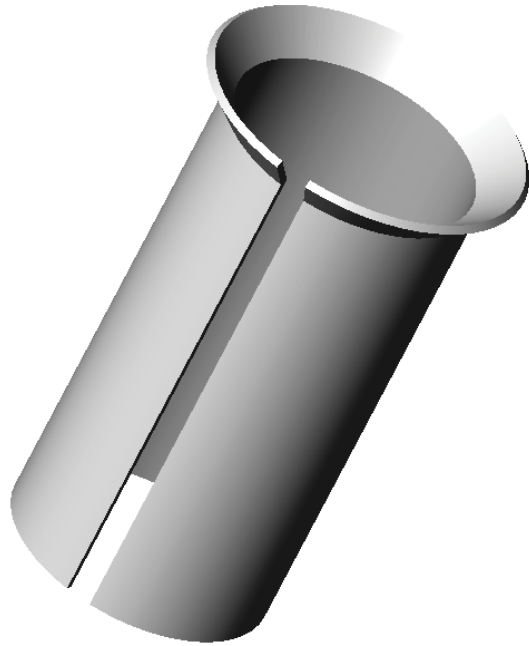

***Flared Sleeves***

***Straight Sleeves***

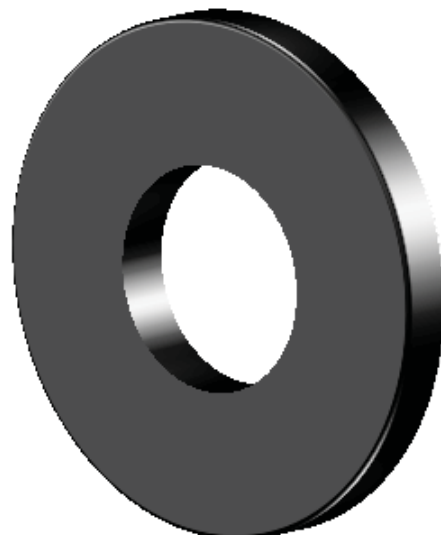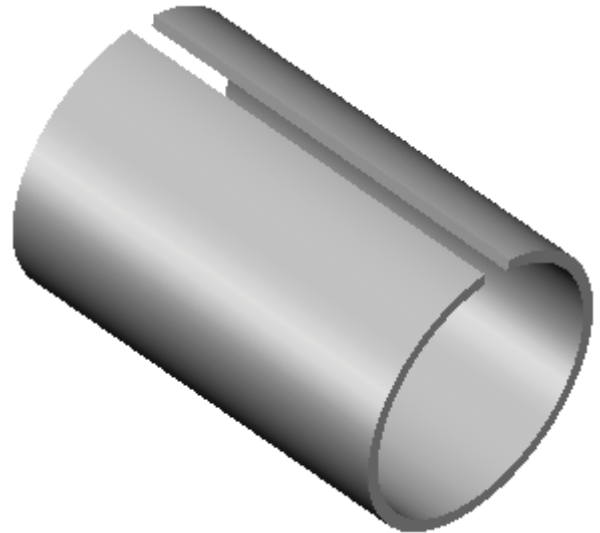


***Backup Blocks***


*Detailed Tooling*  
*Page 112*

- UNCONTROLLED IF PRINTED -

## 2.4.1 SPLIT SLEEVES




**Figure 2.4-1A  
Flared Sleeve**

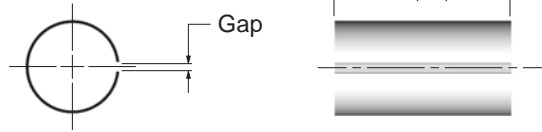

**Figure 2.4-1B  
Straight Sleeve**

- Sleeves are used in conjunction with a mandrel to allow a one-sided operation, provide lubrication, ensure that the hole is expanded in a radial direction, and protect the hole from damage.
- A flared sleeve configuration is generally recommended (except when stacking or when using the countersink nose cap).
- Each sleeve may only be used once.
- Manufactured from stainless steel.
- Each sleeve is internally pre-lubricated with a proprietary dry-film lubricant.
- Maximum length is identified in Table 2.4-1B, but shorter sleeves may be stacked to provide increased length.
- A flared or straight configuration can be provided.
- Sleeve must be at least 1/32 inch longer than the material stackup with a standard nose cap, 5/32 inch longer with a countersink nose cap.
- Identification is provided by an electroetched model number on each sleeve (model number may only be STDN).
- Special order sleeve lengths are available.
- For larger sizes, please contact our Sales Staff.

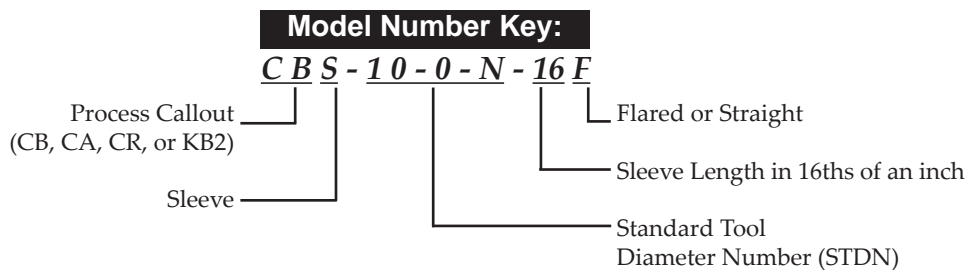

*Detailed Tooling  
Page 113*

- UNCONTROLLED IF PRINTED -

## 2.4.1 SPLIT SLEEVES

**Table 2.4-1A  
Available Sleeve Lengths**

<i>Flared Sleeves</i>		<i>Straight Sleeves</i>	
Length Callout	Effective Length (inch)*	Length Callout	Effective Length (inch)*
-8F	0.50	-8S	0.50
-12F	0.75	-12S	0.75
-16F	1.00	-16S	1.00
-20F	1.25	-20S	1.25
-23F	1.44	-24S	1.50
-32F	2.00	-33S	2.06
-36F	2.25	-37S	2.31
-40F	2.50	-41S	2.56
-48F	3.00	-49S	3.06
-56F	3.50	-57S	3.56
-64F	4.00	-65S	4.06
-72F	4.50	-73S	4.56

\* For flared sleeves, the effective length is from the bottom of the flare to the end of the sleeve (refer to Figure 2.4-1A).

**Table 2.4-1B  
Maximum Sleeve Lengths**

STDN Range	Maximum Length in 1/16-inch
4-0-N through 4-4-N	-36F/-37S
6-0-N through 8-3-N	-36F/-37S
10-0-N through 10-2-N	-40F/-41S
10-3-N through 16-1-N	-48F/-49S
16-2-N through 18-2-N	-56F/-57S
18-3-N through 22-3-N	-64F/-65S
24-0-N and larger	-72F/-73S

## 2.4.1 SPLIT SLEEVES

**Table 2.4-1C  
CB Sleeves**

1	
STDN	Model Number
4-0-N	CBS-4-0-N-16F
4-1-N	CBS-4-1-N-16F
4-2-N	CBS-4-2-N-16F
4-3-N	CBS-4-3-N-16F
4-4-N	CBS-4-4-N-16F
6-0-N	CBS-6-0-N-16F
6-1-N	CBS-6-1-N-16F
6-2-N	CBS-6-2-N-16F
6-3-N	CBS-6-3-N-16F
8-0-N	CBS-8-0-N-16F
8-1-N	CBS-8-1-N-16F
8-2-N	CBS-8-2-N-16F
8-3-N	CBS-8-3-N-16F
10-0-N	CBS-10-0-N-16F
10-1-N	CBS-10-1-N-16F
10-2-N	CBS-10-2-N-16F
10-3-N	CBS-10-3-N-16F

2	
STDN	Model Number
12-0-N	CBS-12-0-N-16F
12-1-N	CBS-12-1-N-16F
12-2-N	CBS-12-2-N-16F
12-3-N	CBS-12-3-N-16F
14-0-N	CBS-14-0-N-16F
14-1-N	CBS-14-1-N-16F
14-2-N	CBS-14-2-N-16F
14-3-N	CBS-14-3-N-16F
16-0-N	CBS-16-0-N-16F
16-1-N	CBS-16-1-N-16F
16-2-N	CBS-16-2-N-16F
16-3-N	CBS-16-3-N-16F
18-0-N	CBS-18-0-N-16F
18-1-N	CBS-18-1-N-16F
18-2-N	CBS-18-2-N-16F
18-3-N	CBS-18-3-N-16F
20-0-N	CBS-20-0-N-16F
20-1-N	CBS-20-1-N-16F
20-2-N	CBS-20-2-N-16F
20-3-N	CBS-20-3-N-16F

3	
STDN	Model Number
22-0-N	CBS-22-0-N-16F
22-1-N	CBS-22-1-N-16F
22-2-N	CBS-22-2-N-16F
22-3-N	CBS-22-3-N-16F
24-0-N	CBS-24-0-N-16F
24-1-N	CBS-24-1-N-16F
24-2-N	CBS-24-2-N-16F
24-3-N	CBS-24-3-N-16F
26-0-N	CBS-26-0-N-16F
26-1-N	CBS-26-1-N-16F
26-2-N	CBS-26-2-N-16F
26-3-N	CBS-26-3-N-16F
28-0-N	CBS-28-0-N-16F
28-1-N	CBS-28-1-N-16F
28-2-N	CBS-28-2-N-16F
28-3-N	CBS-28-3-N-16F
30-0-N	CBS-30-0-N-16F
30-1-N	CBS-30-1-N-16F
30-2-N	CBS-30-2-N-16F
30-3-N	CBS-30-3-N-16F

**Table 2.4-1D  
CA Sleeves**

1	
STDN	Model Number
20	CAS-20-16F
21	CAS-21-16F
22	CAS-22-16F
23	CAS-23-16F
30	CAS-30-16F
31	CAS-31-16F
32	CAS-32-16F
33	CAS-33-16F
40	CAS-40-16F
41	CAS-41-16F
42	CAS-42-16F
43	CAS-43-16F

2	
STDN	Model Number
50	CAS-50-16F
51	CAS-51-16F
52	CAS-52-16F
53	CAS-53-16F
60	CAS-60-16F
61	CAS-61-16F
62	CAS-62-16F
63	CAS-63-16F
70	CAS-70-16F
71	CAS-71-16F
72	CAS-72-16F
73	CAS-73-16F

3	
STDN	Model Number
80	CAS-80-16F
81	CAS-81-16F
82	CAS-82-16F
83	CAS-83-16F
90	CAS-90-16F
91	CAS-91-16F
92	CAS-92-16F
93	CAS-93-16F
100	CAS-100-16F
101	CAS-101-16F
102	CAS-102-16F
103	CAS-103-16F
110	CAS-110-16F
111	CAS-111-16F

Detailed Tooling  
Page 115

- UNCONTROLLED IF PRINTED -

## 2.4.1 SPLIT SLEEVES

**Table 2.4-1E  
KB2 Sleeves**


STDN	Model Number
40-****-0	KB2S-40-****-16F
41-****-0	KB2S-41-****-16F
42-****-0	KB2S-42-****-16F
43-****-0	KB2S-43-****-16F
60-****-0	KB2S-60-****-16F
61-****-0	KB2S-61-****-16F
62-****-0	KB2S-62-****-16F
63-****-0	KB2S-63-****-16F
80-****-0	KB2S-80-****-16F
81-****-0	KB2S-81-****-16F
82-****-0	KB2S-82-****-16F
83-****-0	KB2S-83-****-16F
100-****-0	KB2S-100-****-16F
101-****-0	KB2S-101-****-16F
102-****-0	KB2S-102-****-16F
103-****-0	KB2S-103-****-16F
120-****-0	KB2S-120-****-16F
121-****-0	KB2S-121-****-16F
122-****-0	KB2S-122-****-16F
123-****-0	KB2S-123-****-16F

**Table 2.4-1F  
CR Sleeves**

STDN	Model Number
R30	CRS-R30-16F
R32	CRS-R32-16F
R40	CRS-R40-16F
R42	CRS-R42-16F
R50	CRS-R50-16F
R52	CRS-R52-16F
R60	CRS-R60-16F
R62	CRS-R62-16F


\*\*\*\* Refer to Cx2s Tooling for complete STDN information.

## 2.4.2 BACKUP BLOCKS

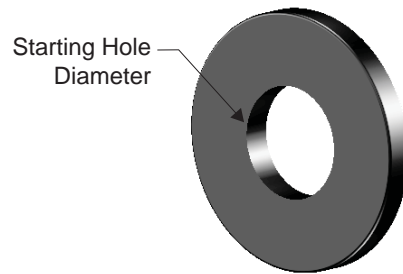

**Figure 2.4-2**  
**Backup Block**

- Used in the cold expansion process to provide either a higher pull force for countersink cold expansion or in-plane stability to thin structure.
- The inside diameter is manufactured to the same starting hole dimensional requirements as the fastener hole that is being cold expanded.
- The backup block combined with the thickness of the straight portion of the hole must be greater than or equal to the finish hole diameter.
- The outside diameter of the backup block should be at least five times greater than the diameter of the hole.
- Backup blocks can only be used once.

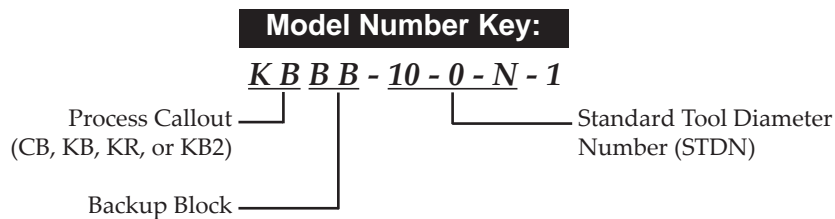

## 2.4.2 BACKUP BLOCKS

**Table 2.4-2A  
KB Blocks**

STDN	Model Number
4-0-N	KBBB-4-0-N-1
4-1-N	KBBB-4-1-N-1
4-2-N	KBBB-4-2-N-1
4-3-N	KBBB-4-3-N-1
4-4-N	KBBB-4-4-N-1
6-0-N	KBBB-6-0-N-1
6-1-N	KBBB-6-1-N-1
6-2-N	KBBB-6-2-N-1
6-3-N	KBBB-6-3-N-1
8-0-N	KBBB-8-0-N-1
8-1-N	KBBB-8-1-N-1
8-2-N	KBBB-8-2-N-1
8-3-N	KBBB-8-3-N-1
10-0-N	KBBB-10-0-N-1
10-1-N	KBBB-10-1-N-1
10-2-N	KBBB-10-2-N-1
10-3-N	KBBB-10-3-N-1

Sizes available up to STDN 20-3-N.  
See Model Number Key.

**Table 2.4-2B  
KR Blocks**

STDN	Assembly Model Number
R30	KRBB-R30-1
R32	KRBB-R32-1
R40	KRBB-R40-1
R42	KRBB-R42-1
R50	KRBB-R50-1
R52	KRBB-R52-1
R60	KRBB-R60-1
R62	KRBB-R62-1

**Table 2.4-2C  
KB2 Blocks**

STDN	Model Number
40-****-0	KB2BB-40-****-0
41-****-0	KB2BB-41-****-0
42-****-0	KB2BB-42-****-0
43-****-0	KB2BB-43-****-0
60-****-0	KB2BB-60-****-0
61-****-0	KB2BB-61-****-0
62-****-0	KB2BB-62-****-0
63-****-0	KB2BB-63-****-0
80-****-0	KB2BB-80-****-0
81-****-0	KB2BB-81-****-0
82-****-0	KB2BB-82-****-0
83-****-0	KB2BB-83-****-0
100-****-0	KB2BB-100-****-0
101-****-0	KB2BB-101-****-0
102-****-0	KB2BB-102-****-0
103-****-0	KB2BB-103-****-0
120-****-0	KB2BB-120-****-0
121-****-0	KB2BB-121-****-0
122-****-0	KB2BB-122-****-0
123-****-0	KB2BB-123-****-0

\*\*\*\* Refers to Cx2s Tooling for complete STDN information.



*This page intentionally left blank  
for two-sided printing*

*Detailed Tooling  
Page 119*

- UNCONTROLLED IF PRINTED -



Visit [www.fatiguetechnology.com](http://www.fatiguetechnology.com) for the most up-to-date content, answers to your most frequently asked sales and technical questions, contact information, and more.

---


# **CB TOOLING FOR Cx IN ALUMINUM AND MILD STEELS**

## **3.0 CB TOOLING**

<b>Section</b>	<b>Page</b>
3.1 Process Description .....	122
3.2 Process Overview .....	123
3.3 STDN Selection Table for New Holes .....	124
3.4 STDN Selection Table for Rework of Existing Holes.....	126
3.5 Standard Tooling.....	128
3.6 Countersink Tooling.....	132

For complete CB Tooling specifications please visit our online technical library at [www.fatiguetechnology.com/technical-library.asp](http://www.fatiguetechnology.com/technical-library.asp) and download FTI Spec 8101, or contact your nearest FTI Representative. Product specifications include a system overview, structure requirements, installation procedure, and a tooling selection guide.

## 3.1 PROCESS DESCRIPTION

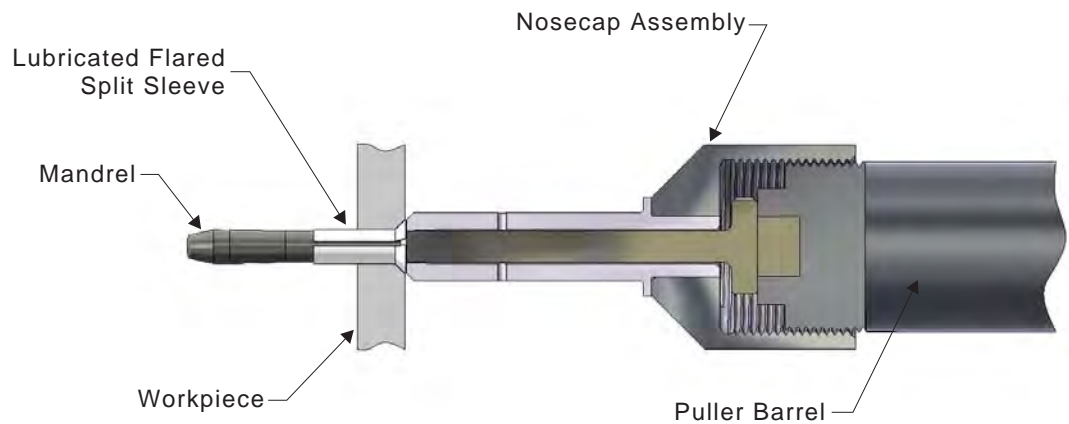

**Figure 3.1**  
**CB System Components**

The FTI basic system of Split Sleeve Cold Expansion (SsCx) tooling, CB series, was designed primarily for production applications in aluminum and mild steel. The process includes development of the starting hole, cold expanding the hole, and post-sizing of the hole to accommodate the required interference fastener or fastening device. The CB series system of tooling is also used for rework applications and has commonly been called out for aircraft service bulletins. For pre-existing countersunk holes, the countersink and straight portion of the hole can be simultaneously cold expanded using a special Countersink Cold Expansion (CsCx) nose cap assembly.

CB tooling is available in nominal and 1/64-inch oversizes from 1/8 inch to 1 inch and larger. For tooling applicable to high strength steel and titanium, please see Section 5.0 for our CA Series. For tooling specifically designed for rework, see Section 6.0 for our CR Series. For technical assistance outside the scope of this catalog, please contact our Customer Service Department at 206-246-2010.

## 3.2 PROCESS OVERVIEW

1. Drill starting hole.



2. Ream starting hole.



3. Check starting hole diameter.



4. Inspect mandrel.



5. Slide split sleeve over mandrel.




6. Insert mandrel and split sleeve into starting hole.



7. Place nose cap firmly against workpiece.



8. Cold expand hole by pulling the mandrel through the pre-lubricated split sleeve.



9. Remove distorted sleeve.



10. Verify cold expansion.



11. Finish ream hole.



12. Install fastener.



- UNCONTROLLED IF PRINTED -

CB Tooling  
Page 123

# 3.3 STDN SELECTION TABLE FOR NEW HOLES

The "CB" STDN selection tables provide a choice of two final ream allowances **after** cold expansion. Since the process provides a large zone of residual compressive stress, either ream amount can be used without impacting the fatigue life. The smaller ream allowance (OPTION #1) removes less material. The larger ream allowance (OPTION #2) removes more of the surface upset around the hole, which may be more desirable for multi-material stackups. The average ream allowances shown in Table 3.3A are based on installation of a typical Hi-Lok fastener.

**Note:** In column 1A, for a 3/16-inch final fastener you may use either the 4-4-N or 6-0-N tooling depending on your final ream preference.

**Table 3.3A**  
**CB Tooling STDN Selection for New Holes**

OPTION #1		OPTION #2		2	3
1A		1B			
Reference Fastener		Reference Fastener		Standard Tool Diameter Number (STDN)	Max Finished Hole Diameter Not to Exceed
Diameter	Ave. Ream Allowance	Diameter	Ave. Ream Allowance		
1/8	.007	1/8	.007	4-0-N	.1370
9/64	.007	9/64	.007	4-1-N	.1560
5/32	.006	5/32	.006	4-2-N	.1760
11/64	.006	11/64	.006	4-3-N	.1920
3/16	.012	3/16	.012	4-4-N	.2026
3/16	.003	13/64	.019	6-0-N	.2130
13/64	.004	7/32	.019	6-1-N	.2300
7/32	.002	15/64	.018	6-2-N	.2490
15/64	.002	1/4	.017	6-3-N	.2650
1/4	.006	17/64	.022	8-0-N	.2790
17/64	.006	9/32	.022	8-1-N	.2950
9/32	.006	19/64	.022	8-2-N	.3128
19/64	.005	5/16	.021	8-3-N	.3306
5/16	.006	21/64	.021	10-0-N	.3490
21/64	.006	11/32	.021	10-1-N	.3650
11/32	.005	23/64	.021	10-2-N	.3852
23/64	.005	3/8	.021	10-3-N	.3996
3/8	.005	25/64	.021	12-0-N	.4190
25/64	.005	13/32	.020	12-1-N	.4350
13/32	.004	27/64	.019	12-2-N	.4538
27/64	.004	7/16	.020	12-3-N	.4710
7/16	.004	29/64	.020	14-0-N	.4860
29/64	.004	15/32	.019	14-1-N	.5020
15/32	.006	31/64	.021	14-2-N	.5150
31/64	.006	1/2	.022	14-3-N	.5300
1/2	.012	33/64	.027	16-0-N	.5390
33/64	.012	17/32	.028	16-1-N	.5550
17/32	.012	35/64	.027	16-2-N	.5700
35/64	.012	9/16	.027	16-3-N	.5860

### 3.3 STDN SELECTION TABLE FOR NEW HOLES

To properly select the STDN:

- For a smaller ream allowance, use column 1A to determine the final fastener size  
For a larger ream allowance use column 1B to select the final fastener.
- Move across to Column 2 to select the proper STDN.
- Using this STDN, select the proper set of tooling from Table 3.5A.
- Column 3 states the maximum diameter the hole can be reamed to before requiring further cold expansion.

**Table 3.3A (Continued)**  
**CB Tooling STDN Selection for New Holes**

OPTION #1		OPTION #2			
1A		1B		2	3
Reference Fastener		Reference Fastener		Standard Tool Diameter Number (STDN)	Max Finished Hole Diameter Not to Exceed
Diameter	Ave. Ream Allowance	Diameter	Ave. Ream Allowance		
9/16	.010	37/64	.026	18-0-N	.6020
37/64	.011	19/32	.026	18-1-N	.6180
19/32	.010	39/64	.026	18-2-N	.6330
39/64	.010	5/8	.026	18-3-N	.6480
5/8	.011	41/64	.026	20-0-N	.6620
41/64	.011	21/32	.026	20-1-N	.6780
21/32	.008	43/64	.023	20-2-N	.6960
43/64	.008	11/16	.024	20-3-N	.7110
11/16	.010	45/64	.025	22-0-N	.7240
45/64	.010	23/32	.025	22-1-N	.7400
23/32	.010	47/64	.025	22-2-N	.7550
47/64	.010	3/4	.025	22-3-N	.7710
3/4	.012	49/64	.027	24-0-N	.7830
49/64	.012	25/32	.028	24-1-N	.7990
25/32	.012	51/64	.027	24-2-N	.8140
51/64	.012	13/16	.027	24-3-N	.8300
13/16	.009	53/64	.025	26-0-N	.8470
53/64	.010	27/32	.025	26-1-N	.8630
27/32	.011	55/64	.027	26-2-N	.8760
55/64	.011	7/8	.027	26-3-N	.8910
7/8	.012	57/64	.027	28-0-N	.9060
57/64	.012	29/32	.028	28-1-N	.9220
29/32	.004	59/64	.020	28-2-N	.9440
59/64	.005	15/16	.020	28-3-N	.9590
15/16	.013	61/64	.028	30-0-N	.9660
61/64	.013	31/32	.029	30-1-N	.9820
31/32	.012	63/64	.028	30-2-N	.9980
63/64	.012	1	.028	30-3-N	1.0140
1	.009	1-1/16	.025	32-0-N	1.0300

Greater than 1 inch contact Fatigue Technology for technical assistance.

# 3.4 STDN SELECTION TABLE FOR REWORK OF EXISTING HOLES

Table 3.4A has been designed to assist with STDN selection for existing fastener holes in rework conditions. Every aircraft manufacturer has guidelines for fastener removal, pre-existing crack removal, and hole preparation that should be followed. Use this table to select an STDN using either your existing fastener or required final fastener as a guide. Note that the STDNs listed in Column 3 have been chosen for minimal ream allowances.

**Table 3.4A**  
**CB Tooling STDN Selection for Rework of Existing Holes**

1 Nominal Existing Fastener Diameter Inches	2 Maximum Allowable Existing Diameter Before Cx	3 Standard Tool Diameter Number (STDN)	4 Cold Expansion Starting Hole Diameter		5 Final Fastener Diameter Inches	6 Maximum Finished Hole Diameter (not to exceed)
			Minimum	Maximum		
1/8	.134	4-2-N	.144	.146	5/32	.1760
9/64	.150	4-3-N	.160	.162	11/64	.1920
5/32	.159	4-4-N	.169	.171	3/16	.2026
5/32	.167	6-0-N	.177	.180	3/16	.2130
11/64	.182	6-1-N	.192	.195	13/64	.2300
3/16	.199	6-2-N	.209	.212	7/32	.2490
13/64	.215	6-3-N	.225	.228	15/64	.2650
7/32	.225	8-0-N	.235	.238	1/4	.2790
15/64	.241	8-1-N	.251	.254	17/64	.2950
1/4	.256	8-2-N	.266	.269	9/32	.3128
17/64	.273	8-3-N	.283	.286	19/64	.3306
9/32	.287	10-0-N	.297	.300	5/16	.3490
19/64	.303	10-1-N	.313	.316	21/64	.3650
5/16	.318	10-2-N	.328	.331	11/32	.3852
21/64	.334	10-3-N	.344	.347	23/64	.3996
11/32	.349	12-0-N	.359	.362	3/8	.4190
23/64	.365	12-1-N	.375	.378	25/64	.4250
3/8	.381	12-2-N	.391	.394	13/32	.4538
25/64	.396	12-3-N	.406	.409	27/64	.4710
13/32	.411	14-0-N	.421	.424	7/16	.4860
27/64	.427	14-1-N	.437	.440	29/64	.5020
7/16	.440	14-2-N	.450	.453	15/32	.5150
29/64	.455	14-3-N	.465	.468	31/64	.5300
29/64	.464	16-0-N	.474	.477	1/2	.5390
15/32	.480	16-1-N	.490	.493	33/64	.5550
31/64	.495	16-2-N	.505	.508	17/32	.5700

Continued on next page...

### 3.4 STDN SELECTION TABLE FOR REWORK OF EXISTING HOLES

To select the STDN using Table 3.4A, use the following steps:

1. Remove the existing fastener and measure the hole diameter.
2. If a minimal amount of material is to be removed, select the STDN from Column 3 that corresponds with the existing hole diameter in Column 2. If a larger final fastener is desired, find the final fastener size in Column 5 and select the corresponding STDN in Column 3.
3. Using the STDN, select the tooling from Table 3.5A on the following pages.





**Table 3.4A (Continued)**  
**CB Tooling STDN Selection for Rework of Existing Holes**

1	2	3	4		5	6
Nominal Existing Fastener Diameter Inches	Maximum Allowable Existing Diameter Before Cx	Standard Tool Diameter Number (STDN)	Cold Expansion Starting Hole Diameter		Final Fastener Diameter Inches	Maximum Finished Hole Diameter (not to exceed)
			Minimum	Maximum		
1/2	.511	16-3-N	.521	.524	35/64	.5860
33/64	.527	18-0-N	.537	.540	9/16	.6020
17/32	.543	18-1-N	.553	.556	37/64	.6180
35/64	.558	18-2-N	.568	.571	19/32	.6330
9/16	.573	18-3-N	.583	.586	39/64	.6480
37/64	.587	20-0-N	.597	.600	5/8	.6620
19/32	.603	20-1-N	.613	.616	41/64	.6780
39/64	.621	20-2-N	.631	.634	21/32	.6960
5/8	.636	20-3-N	.646	.649	43/64	.7110
41/64	.649	22-0-N	.659	.662	11/16	.7240
21/32	.665	22-1-N	.675	.678	45/64	.7400
43/64	.680	22-2-N	.690	.693	23/32	.7550
11/16	.696	22-3-N	.706	.709	47/64	.7710
45/64	.708	24-0-N	.718	.721	3/4	.7830
23/32	.724	24-1-N	.734	.737	49/64	.7990
47/64	.739	24-2-N	.749	.752	25/32	.8140
3/4	.755	24-3-N	.765	.768	51/64	.8300
49/64	.772	26-0-N	.782	.785	13/16	.8470
25/32	.788	26-1-N	.798	.801	53/64	.8630
51/64	.801	26-2-N	.811	.814	27/32	.8760
13/16	.816	26-3-N	.826	.829	55/64	.8910
53/64	.831	28-0-N	.841	.844	7/8	.9060
27/32	.847	28-1-N	.857	.860	57/64	.9220
55/64	.869	28-2-N	.879	.882	28/32	.9440
7/8	.884	28-3-N	.894	.897	59/64	.9590
57/64	.891	30-0-N	.901	.904	15/16	.9660
29/32	.907	30-1-N	.917	.920	61/64	.9820
59/64	.923	30-2-N	.933	.936	31/32	.9980
15/16	.939	30-3-N	.949	.952	63/64	1.0140

# 3.5 STANDARD TOOLING

1. To select a Standard Tool Diameter Number refer to Table 3.3A or 3.4A.
2. With the STDN, select the system of Standard Tooling from Table 3.5A.

**Table 3.5A**  
**Standard CB Tooling**





1	2	3	4	5
Standard Tool Diameter Number (STDN)	 Starting Drill	 Starting Reamer	 Combination Gage	 Mandrel Gage
4-0-N	CBSD-4-0-N-1	CBSR-4-0-N-1	CBG-4-0-N-1	CBMG-4-0-N
4-1-N	CBSD-4-1-N-1	CBSR-4-1-N-1	CBG-4-1-N-1	CBMG-4-1-N
4-2-N	CBSD-4-2-N-1	CBSR-4-2-N-1	CBG-4-2-N-1	CBMG-4-2-N
4-3-N	CBSD-4-3-N-1	CBSR-4-3-N-1	CBG-4-3-N-1	CBMG-4-3-N
4-4-N	CBSD-4-4-N-1	CBSR-4-4-N-1	CBG-4-4-N-1	CBMG-4-4-N
6-0-N	CBSD-6-0-N-1	CBSR-6-0-N-1	CBG-6-0-N-1	CBMG-6-0-N
6-1-N	CBSD-6-1-N-1	CBSR-6-1-N-1	CBG-6-1-N-1	CBMG-6-1-N
6-2-N	CBSD-6-2-N-1	CBSR-6-2-N-1	CBG-6-2-N-1	CBMG-6-2-N
6-3-N	CBSD-6-3-N-1	CBSR-6-3-N-1	CBG-6-3-N-1	CBMG-6-3-N
8-0-N	CBSD-8-0-N-1	CBSR-8-0-N-1	CBG-8-0-N-1	CBMG-8-0-N
8-1-N	CBSD-8-1-N-1	CBSR-8-1-N-1	CBG-8-1-N-1	CBMG-8-1-N
8-2-N	CBSD-8-2-N-1	CBSR-8-2-N-1	CBG-8-2-N-1	CBMG-8-2-N
8-3-N	CBSD-8-3-N-1	CBSR-8-3-N-1	CBG-8-3-N-1	CBMG-8-3-N
10-0-N	CBSD-10-0-N-1	CBSR-10-0-N-1	CBG-10-0-N-1	CBMG-10-0-N
10-1-N	CBSD-10-1-N-1	CBSR-10-1-N-1	CBG-10-1-N-1	CBMG-10-1-N
10-2-N	CBSD-10-2-N-1	CBSR-10-2-N-1	CBG-10-2-N-1	CBMG-10-2-N
10-3-N	CBSD-10-3-N-1	CBSR-10-3-N-1	CBG-10-3-N-1	CBMG-10-3-N
12-0-N	CBSD-12-0-N-1	CBSR-12-0-N-1	CBG-12-0-N-1	CBMG-12-0-N
12-1-N	CBSD-12-1-N-1	CBSR-12-1-N-1	CBG-12-1-N-1	CBMG-12-1-N
12-2-N	CBSD-12-2-N-1	CBSR-12-2-N-1	CBG-12-2-N-1	CBMG-12-2-N
12-3-N	CBSD-12-3-N-1	CBSR-12-3-N-1	CBG-12-3-N-1	CBMG-12-3-N
14-0-N	CBSD-14-0-N-1	CBSR-14-0-N-1	CBG-14-0-N-1	CBMG-14-0-N
14-1-N	CBSD-14-1-N-1	CBSR-14-1-N-1	CBG-14-1-N-1	CBMG-14-1-N
14-2-N	CBSD-14-2-N-1	CBSR-14-2-N-1	CBG-14-2-N-1	CBMG-14-2-N
14-3-N	CBSD-14-3-N-1	CBSR-14-3-N-1	CBG-14-3-N-1	CBMG-14-3-N
16-0-N	CBSD-16-0-N-1	CBSR-16-0-N-1	CBG-16-0-N-1	CBMG-16-0-N
16-1-N	CBSD-16-1-N-1	CBSR-16-1-N-1	CBG-16-1-N-1	CBMG-16-1-N
16-2-N	CBSD-16-2-N-1	CBSR-16-2-N-1	CBG-16-2-N-1	CBMG-16-2-N
16-3-N	CBSD-16-3-N-1	CBSR-16-3-N-1	CBG-16-3-N-1	CBMG-16-3-N

Continued on next page...

## 3.5 STANDARD TOOLING

3. Refer to Section 2.0, Detailed Tooling for complete description of part.
4. Replace \*\*\*\* in gage finish reamer model number with the minimum final hole diameter.

**Table 3.5A (Continued)  
Standard CB Tooling**

	6	7	8	9
<b>Standard Tool Diameter Number (STDN)</b>	 <b>Flared Sleeve</b>	 <b>Mandrel</b>	 <b>Nosecap Assembly</b>	 <b>Gage Finish Reamer</b>
4-0-N	CBS-4-0-N-16F	CBM-4-0-N-1-30-V1	MEN-14A-0401F	CBR-4-0-N-1-****
4-1-N	CBS-4-1-N-16F	CBM-4-1-N-1-30-V1	MEN-14A-0401F	CBR-4-1-N-1-****
4-2-N	CBS-4-2-N-16F	CBM-4-2-N-1-30-V1	MEN-14A-0423F	CBR-4-2-N-1-****
4-3-N	CBS-4-3-N-16F	CBM-4-3-N-1-30-V1	MEN-14A-0423F	CBR-4-3-N-1-****
4-4-N	CBS-4-4-N-16F	CBM-4-4-N-1-30-V1	MEN-14A-0601F	CBR-4-4-N-1-****
6-0-N	CBS-6-0-N-16F	CBM-6-0-N-1-30-V1	MEN-14A-0601F	CBR-6-0-N-1-****
6-1-N	CBS-6-1-N-16F	CBM-6-1-N-1-30-V1	MEN-14A-0601F	CBR-6-1-N-1-****
6-2-N	CBS-6-2-N-16F	CBM-6-2-N-1-30-V1	MEN-14A-0623F	CBR-6-2-N-1-****
6-3-N	CBS-6-3-N-16F	CBM-6-3-N-1-40-V1	MEN-14A-0623F	CBR-6-3-N-1-****
8-0-N	CBS-8-0-N-16F	CBM-8-0-N-1-40-V1	MEN-14A-0801F	CBR-8-0-N-1-****
8-1-N	CBS-8-1-N-16F	CBM-8-1-N-1-40-V1	MEN-14A-0801F	CBR-8-1-N-1-****
8-2-N	CBS-8-2-N-16F	CBM-8-2-N-1-40-V1	MEN-14A-0823F	CBR-8-2-N-1-****
8-3-N	CBS-8-3-N-16F	CBM-8-3-N-1-40-V1	MEN-14A-0823F	CBR-8-3-N-1-****
10-0-N	CBS-10-0-N-16F	CBM-10-0-N-1-40-V1	MEN-14A-1001F	CBR-10-0-N-1-****
10-1-N	CBS-10-1-N-16F	CBM-10-1-N-1-40-V1	MEN-14A-1001F	CBR-10-1-N-1-****
10-2-N	CBS-10-2-N-16F	CBM-10-2-N-1-40-V1	MEN-14A-1023F	CBR-10-2-N-1-****
10-3-N	CBS-10-3-N-16F	CBM-10-3-N-1-40-V1	MEN-14A-1023F	CBR-10-3-N-1-****
12-0-N	CBS-12-0-N-16F	CBM-12-0-N-1-40-V1	MEN-14A-1201F	CBR-12-0-N-1-****
12-1-N	CBS-12-1-N-16F	CBM-12-1-N-1-40-V1	MEN-14A-1201F	CBR-12-1-N-1-****
12-2-N	CBS-12-2-N-16F	CBM-12-2-N-1-40-V1	MEN-14A-1223F	CBR-12-2-N-1-****
12-3-N	CBS-12-3-N-16F	CBM-12-3-N-1-40-V1	MEN-14A-1223F	CBR-12-3-N-1-****
14-0-N	CBS-14-0-N-16F	CBM-14-0-N-1-40-V1	MEN-14B-1401F	CBR-14-0-N-1-****
14-1-N	CBS-14-1-N-16F	CBM-14-1-N-1-40-V1	MEN-14B-1401F	CBR-14-1-N-1-****
14-2-N	CBS-14-2-N-16F	CBM-14-2-N-1-40-V1	MEN-14B-1423F	CBR-14-2-N-1-****
14-3-N	CBS-14-3-N-16F	CBM-14-3-N-1-40-V1	MEN-14B-1423F	CBR-14-3-N-1-****
16-0-N	CBS-16-0-N-16F	CBM-16-0-N-1-50-V1	MEN-14B-1601F	CBR-16-0-N-1-****
16-1-N	CBS-16-1-N-16F	CBM-16-1-N-1-50-V1	MEN-14B-1601F	CBR-16-1-N-1-****
16-2-N	CBS-16-2-N-16F	CBM-16-2-N-1-50-V1	MEN-14B-1623F	CBR-16-2-N-1-****
16-3-N	CBS-16-3-N-16F	CBM-16-3-N-1-50-V1	MEN-14B-1623F	CBR-16-3-N-1-****





\*\*\*\* Denotes final hole diameter to be determined by customer.

Continued on next page...

# 3.5 STANDARD TOOLING

1. To select a Standard Tool Diameter Number, refer to Table 3.3A or 3.4A.
2. With the STDN, select the system of Standard Tooling from Table 3.5A.

**Table 3.5A (Continued)  
Standard CB Tooling**





1	2	3	4	5
Standard Tool Diameter Number (STDN)	 Starting Drill	 Starting Reamer	 Combination Gage	 Mandrel Gage
18-0-N	CBSD-18-0-N-1	CBSR-18-0-N-1	CBG-18-0-N-1	CBMG-18-0-N
18-1-N	CBSD-18-1-N-1	CBSR-18-1-N-1	CBG-18-1-N-1	CBMG-18-1-N
18-2-N	CBSD-18-2-N-1	CBSR-18-2-N-1	CBG-18-2-N-1	CBMG-18-2-N
18-3-N	CBSD-18-3-N-1	CBSR-18-3-N-1	CBG-18-3-N-1	CBMG-18-3-N
20-0-N	CBSD-20-0-N-1	CBSR-20-0-N-1	CBG-20-0-N-1	CBMG-20-0-N
20-1-N	CBSD-20-1-N-1	CBSR-20-1-N-1	CBG-20-1-N-1	CBMG-20-1-N
20-2-N	CBSD-20-2-N-1	CBSR-20-2-N-1	CBG-20-2-N-1	CBMG-20-2-N
20-3-N	CBSD-20-3-N-1	CBSR-20-3-N-1	CBG-20-3-N-1	CBMG-20-3-N
22-0-N	CBSD-22-0-N-1	CBSR-22-0-N-1	CBG-22-0-N-1	CBMG-22-0-N
22-1-N	CBSD-22-1-N-1	CBSR-22-1-N-1	CBG-22-1-N-1	CBMG-22-1-N
22-2-N	CBSD-22-2-N-1	CBSR-22-2-N-1	CBG-22-2-N-1	CBMG-22-2-N
22-3-N	CBSD-22-3-N-1	CBSR-22-3-N-1	CBG-22-3-N-1	CBMG-22-3-N
24-0-N	CBSD-24-0-N-1	CBSR-24-0-N-1	CBG-24-0-N-1	CBMG-24-0-N
24-1-N	CBSD-24-1-N-1	CBSR-24-1-N-1	CBG-24-1-N-1	CBMG-24-1-N
24-2-N	CBSD-24-2-N-1	CBSR-24-2-N-1	CBG-24-2-N-1	CBMG-24-2-N
24-3-N	CBSD-24-3-N-1	CBSR-24-3-N-1	CBG-24-3-N-1	CBMG-24-3-N
26-0-N	CBSD-26-0-N-1	CBSR-26-0-N-1	CBG-26-0-N-1	CBMG-26-0-N
26-1-N	CBSD-26-1-N-1	CBSR-26-1-N-1	CBG-26-1-N-1	CBMG-26-1-N
26-2-N	CBSD-26-2-N-1	CBSR-26-2-N-1	CBG-26-2-N-1	CBMG-26-2-N
26-3-N	CBSD-26-3-N-1	CBSR-26-3-N-1	CBG-26-3-N-1	CBMG-26-3-N
28-0-N	CBSD-28-0-N-1	CBSR-28-0-N-1	CBG-28-0-N-1	CBMG-28-0-N
28-1-N	CBSD-28-1-N-1	CBSR-28-1-N-1	CBG-28-1-N-1	CBMG-28-1-N
28-2-N	CBSD-28-2-N-1	CBSR-28-2-N-1	CBG-28-2-N-1	CBMG-28-2-N
28-3-N	CBSD-28-3-N-1	CBSR-28-3-N-1	CBG-28-3-N-1	CBMG-28-3-N
30-0-N	CBSD-30-0-N-1	CBSR-30-0-N-1	CBG-30-0-N-1	CBMG-30-0-N
30-1-N	CBSD-30-1-N-1	CBSR-30-1-N-1	CBG-30-1-N-1	CBMG-30-1-N
30-2-N	CBSD-30-2-N-1	CBSR-30-2-N-1	CBG-30-2-N-1	CBMG-30-2-N
30-3-N	CBSD-30-3-N-1	CBSR-30-3-N-1	CBG-30-3-N-1	CBMG-30-3-N

# 3.5 STANDARD TOOLING

3. Refer to Section 2.0, Detailed Tooling for complete description of part.
4. Replace \*\*\*\* in gage finish reamer model number with the minimum final hole diameter.

**Note:** This tooling may not be maintained in stock.

**Table 3.5A (Continued)  
Standard CB Tooling**

	6	7	8	9
Standard Tool Diameter Number (STDN)	 Flared Sleeve	 Mandrel	 Nosecap Assembly	 Gage Finish Reamer
18-0-N	CBS-18-0-N-16F	CBM-18-0-N-2-60-V1	MEN-26B-1801F	CBR-18-0-N-1-****
18-1-N	CBS-18-1-N-16F	CBM-18-1-N-2-60-V1	MEN-26B-1801F	CBR-18-1-N-1-****
18-2-N	CBS-18-2-N-16F	CBM-18-2-N-2-60-V1	MEN-26B-1823F	CBR-18-2-N-1-****
18-3-N	CBS-18-3-N-16F	CBM-18-3-N-2-60-V1	MEN-26B-1823F	CBR-18-3-N-1-****
20-0-N	CBS-20-0-N-16F	CBM-20-0-N-2-60-V1	MEN-26B-2001F	CBR-20-0-N-1-****
20-1-N	CBS-20-1-N-16F	CBM-20-1-N-2-60-V1	MEN-26B-2001F	CBR-20-1-N-1-****
20-2-N	CBS-20-2-N-16F	CBM-20-2-N-2-60-V1	MEN-26C-2023F	CBR-20-2-N-1-****
20-3-N	CBS-20-3-N-16F	CBM-20-3-N-2-60-V1	MEN-26C-2023F	CBR-20-3-N-1-****
22-0-N	CBS-22-0-N-16F	CBM-22-0-N-2-60-V1	MEN-26C-2201F	CBR-22-0-N-1-****
22-1-N	CBS-22-1-N-16F	CBM-22-1-N-2-60-V1	MEN-26C-2201F	CBR-22-1-N-1-****
22-2-N	CBS-22-2-N-16F	CBM-22-2-N-2-60-V1	MEN-26C-2223F	CBR-22-2-N-1-****
22-3-N	CBS-22-3-N-16F	CBM-22-3-N-2-60-V1	MEN-26C-2223F	CBR-22-3-N-1-****
24-0-N	CBS-24-0-N-16F	CBM-24-0-N-2-60-V1	MEN-26C-2401F	CBR-24-0-N-1-****
24-1-N	CBS-24-1-N-16F	CBM-24-1-N-2-60-V1	MEN-26C-2401F	CBR-24-1-N-1-****
24-2-N	CBS-24-2-N-16F	CBM-24-2-N-2-60-V1	MEN-26C-2423F	CBR-24-2-N-1-****
24-3-N	CBS-24-3-N-16F	CBM-24-3-N-5-60-V1	MEN-26C-2423F	CBR-24-3-N-1-****
26-0-N	CBS-26-0-N-16F	CBM-26-0-N-5-60-V1	MEN-26C-2601F	CBR-26-0-N-1-****
26-1-N	CBS-26-1-N-16F	CBM-26-1-N-5-60-V1	MEN-26C-2601F	CBR-26-1-N-1-****
26-2-N	CBS-26-2-N-16F	CBM-26-2-N-5-60-V1	MEN-26C-2623F	CBR-26-2-N-1-****
26-3-N	CBS-26-3-N-16F	CBM-26-3-N-5-60-V1	MEN-26C-2623F	CBR-26-3-N-1-****
28-0-N	CBS-28-0-N-16F	CBM-28-0-N-5-60-V1	MEN-26C-2801F	CBR-28-0-N-1-****
28-1-N	CBS-28-1-N-16F	CBM-28-1-N-5-60-V1	MEN-26C-2801F	CBR-28-1-N-1-****
28-2-N	CBS-28-2-N-16F	CBM-28-2-N-5-60-V1	MEN-26C-2823F	CBR-28-2-N-1-****
28-3-N	CBS-28-3-N-16F	CBM-28-3-N-5-60-V1	MEN-26C-2823F	CBR-28-3-N-1-****
30-0-N	CBS-30-0-N-16F	CBM-30-0-N-5-60-V1	MEN-26C-3001F	CBR-30-0-N-1-****
30-1-N	CBS-30-1-N-16F	CBM-30-1-N-5-60-V1	MEN-26C-3001F	CBR-30-1-N-1-****
30-2-N	CBS-30-2-N-16F	CBM-30-2-N-5-60-V1	MEN-26D-3023F	CBR-30-2-N-1-****
30-3-N	CBS-30-3-N-16F	CBM-30-3-N-5-60-V1	MEN-26D-3023F	CBR-30-3-N-1-****





\*\*\*\* Denotes final hole diameter to be determined by customer.

# 3.6 COUNTERSINK TOOLING

To cold expand existing countersunk holes, the countersink nose cap, mandrel, and straight sleeve must be used. A backup block may be necessary for countersunk holes in thin material. To assemble tooling for a countersunk hole, substitute the nose cap, mandrel, and sleeve for the STDN found in Table 3.6A.

For more information on cold expanding countersink holes, refer to Section 8, Countersink Cold Expansion (CsCx).

**Table 3.6A**  
**Alternate Tooling for Countersunk Holes**





1	2	3	4	5
Standard Tool Diameter Number (STDN)	 Countersink Nosecap	 Countersink Mandrel	 Straight Sleeve	 Backup Block
4-0-N	KBC-040-1A	KBM-4-0-N-1-35-V1	CBS-4-0-N-24S	KBBB-4-0-N-1
4-1-N	KBC-041-1A	KBM-4-1-N-1-35-V1	CBS-4-1-N-24S	KBBB-4-1-N-1
4-2-N	KBC-042-1A	KBM-4-2-N-1-35-V1	CBS-4-2-N-24S	KBBB-4-2-N-1
4-3-N	KBC-043-1A	KBM-4-3-N-1-35-V1	CBS-4-3-N-24S	KBBB-4-3-N-1
4-4-N	KBC-044-1A	KBM-4-4-N-1-35-V1	CBS-4-4-N-24S	KBBB-4-4-N-1
6-0-N	KBC-060-1A	KBM-6-0-N-1-35-V1	CBS-6-0-N-24S	KBBB-6-0-N-1
6-1-N	KBC-061-1A	KBM-6-1-N-1-35-V1	CBS-6-1-N-24S	KBBB-6-1-N-1
6-2-N	KBC-062-1A	KBM-6-2-N-1-35-V1	CBS-6-2-N-24S	KBBB-6-2-N-1
6-3-N	KBC-063-1A	KBM-6-3-N-1-35-V1	CBS-6-3-N-24S	KBBB-6-3-N-1
8-0-N	KBC-080-1A	KBM-8-0-N-1-35-V1	CBS-8-0-N-24S	KBBB-8-0-N-1
8-1-N	KBC-081-1A	KBM-8-1-N-1-35-V1	CBS-8-1-N-24S	KBBB-8-1-N-1
8-2-N	KBC-082-1A	KBM-8-2-N-1-35-V1	CBS-8-2-N-24S	KBBB-8-2-N-1
8-3-N	KBC-083-1A	KBM-8-3-N-1-35-V1	CBS-8-3-N-24S	KBBB-8-3-N-1
10-0-N	KBC-100-1A	KBM-10-0-N-1-35-V1	CBS-10-0-N-24S	KBBB-10-0-N-1
10-1-N	KBC-101-1A	KBM-10-1-N-1-35-V1	CBS-10-1-N-24S	KBBB-10-1-N-1
10-2-N	KBC-102-1A	KBM-10-2-N-1-35-V1	CBS-10-2-N-24S	KBBB-10-2-N-1
10-3-N	KBC-103-1A	KBM-10-3-N-1-35-V1	CBS-10-3-N-24S	KBBB-10-3-N-1
12-0-N	KBC-120-1A	KBM-12-0-N-1-35-V1	CBS-12-0-N-24S	KBBB-12-0-N-1
12-1-N	KBC-121-1A	KBM-12-1-N-1-35-V1	CBS-12-1-N-24S	KBBB-12-1-N-1
12-2-N	KBC-122-1A	KBM-12-2-N-1-35-V1	CBS-12-2-N-24S	KBBB-12-2-N-1
12-3-N	KBC-123-1A	KBM-12-3-N-1-35-V1	CBG-12-3-N-24S	KBBB-12-3-N-1

## 3.6 COUNTERSINK TOOLING

To cold expand existing countersunk holes, the countersink nose cap, mandrel, and straight sleeve must be used. A backup block may be necessary for countersunk holes in thin material. To assemble tooling for a countersunk hole, substitute the nose cap, mandrel, and sleeve for the STDN found in Table 3.6A.

For more information on cold expanding countersink holes, refer to Section 8.0, Countersink Cold Expansion (CsCx).

**Table 3.6A (Continued)**  
**Alternate Tooling for Countersunk Holes**

1	2	3	4	5
Standard Tool Diameter Number (STDN)	 Countersink Nosecap	 Countersink Mandrel	 Straight Sleeve	 Backup Block
14-0-N	KBC-140-2A	KBM-14-0-N-2-35-V1	CBS-14-0-N-24S	KBBB-14-0-N-1
14-1-N	KBC-141-2A	KBM-14-1-N-2-35-V1	CBS-14-1-N-24S	KBBB-14-1-N-1
14-2-N	KBC-142-2A	KBM-14-2-N-2-35-V1	CBS-14-2-N-24S	KBBB-14-2-N-1
14-3-N	KBC-143-2A	KBM-14-3-N-2-35-V1	CBS-14-3-N-24S	KBBB-14-3-N-1
16-0-N	KBC-160-2A	KBM-16-0-N-2-35-V1	CBS-16-0-N-24S	KBBB-16-0-N-1
16-1-N	KBC-161-2A	KBM-16-1-N-2-35-V1	CBS-16-1-N-24S	KBBB-16-1-N-1
16-2-N	KBC-162-2A	KBM-16-2-N-2-35-V1	CBS-16-2-N-24S	KBBB-16-2-N-1
16-3-N	KBC-163-2A	KBM-16-3-N-2-35-V1	CBS-16-3-N-24S	KBBB-16-3-N-1
18-0-N	KBC-180-2A	KBM-18-0-N-2-35-V1	CBS-18-0-N-24S	KBBB-18-0-N-1
18-1-N	KBC-181-2A	KBM-18-1-N-2-35-V1	CBS-18-1-N-24S	KBBB-18-1-N-1
18-2-N	KBC-182-2A	KBM-18-2-N-2-35-V1	CBS-18-2-N-24S	KBBB-18-2-N-1
18-3-N	KBC-183-2A	KBM-18-3-N-2-35-V1	CBS-18-3-N-24S	KBBB-18-3-N-1
20-0-N	KBC-200-2A	KBM-20-0-N-2-35-V1	CBS-20-0-N-24S	KBBB-20-0-N-1
20-1-N	KBC-201-2A	KBM-20-1-N-2-35-V1	CBS-20-1-N-24S	KBBB-20-1-N-1
20-2-N	KBC-202-2A	KBM-20-2-N-2-35-V1	CBS-20-2-N-24S	KBBB-20-2-N-1
20-3-N	KBC-203-2A	KBM-20-3-N-2-35-V1	CBS-20-3-N-24S	KBBB-20-3-N-1

# 4.0 CW TOOLING

## CW TOOLING FOR LOW INTERFERENCE Cx IN ALUMINUM PART NUMBER CROSS REFERENCES

Section	Page
4.1 Process Description .....	135
4.2 Tool Diameter Selection .....	136
4.3 STDN Tool Diameter Selection .....	137
4.4 Ordering Examples.....	140
4.5 Mandrel Part Number Cross Reference .....	141
4.6 Standard Nosecap Part Number Cross Reference .....	142

For complete CW Tooling specifications please reference Boeing's CW Specification BAC5973, Class II. For more information, please visit [www.fatiguetechnology.com/technical-library.asp](http://www.fatiguetechnology.com/technical-library.asp) or contact your nearest FTI representative.

# 4.1 PROCESS DESCRIPTION

The Boeing Low Interference (Class II) Sleeve Cold Working process is very similar to the high interference process. FTI manufactures and markets low interference split sleeve cold working tooling to support the Boeing 5973 Class II cold working specification. FTI's low interference tooling system is called **CW Tooling**.


The principal features of the **CW Tooling System** are:

- A medium level of expansion.
- Starting hole and tool diameters are sized to give a finished hole diameter compatible with clearance fits of standard fasteners.
- Standard Tool Diameter Numbers contain the estimated finished cold worked hole diameter.
- Final reaming is not required.

### The Basic Part Number:

The basic part number is identical to the Cx Tooling system except for the following differences:

1. A CW prefix is used instead of a CB prefix.
2. The Standard Tool Diameter Number has a different format.

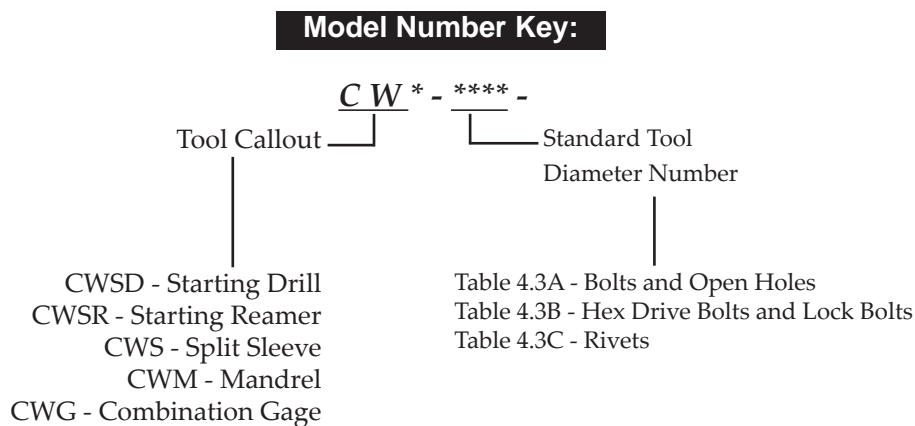

**Note:** Refer to page 140 for ordering examples.

## 4.2 TOOL DIAMETER SELECTION

Recommended Tooling for the Low Interference Split Sleeve Cold Expansion Process (Boeing Class II):

- Puller Unit .....LB-20/HP-20/ST1350A
- PowerPak .....FT-20 or FT-200
- Starting Drill.....CWSD-\*\*\*\*-1
- Starting Reamer ..... CWSR-\*\*\*\*-1
- Mandrel.....CWM-\*\*\*\*-1-20-V1
- Split Sleeves .....CWS-\*\*\*\*-16F
- Nosecaps ..... CBC- (see Table 4.2)
- Combination Gage..... CWG-\*\*\*\*

\*\*\*\* = Standard Tool Diameter Number from Tables 4.3A, 4.3B, or 4.3C.

FTI Extension Nosecaps are available for CW Series tooling. Contact FTI for assistance in selecting the applicable extension nose cap for your tooling STDN.

**Table 4.2  
Recommended Nosecaps**

Standard Tool Diameter Number ****		Nosecap Assembly
Minimum (inch)	Maximum (inch)	
0.1267	0.2206	CBC-11-06F
0.2364	0.2990	CBC-11-08F
0.3090	0.3458	CBC-11-10F
0.3615	0.4083	CBC-12-12F
0.4241	0.4708	CBC-12-14F
0.4865	0.5489	CBC-13-16F

Note: ST1350 puller units may be modified to allow use of FTI nose caps and mandrels (see Table 13.1C). FTI standard puller unit is the LB-20. Refer to Section 2.0 Detailed Tooling for other FTI puller units.

**Table 4.3A**  
**BAC 5973 Class II Cold Working Requirements for**  
**Bolts and Open Holes**

**4.3**  
**STDN TOOL**  
**DIAMETER**  
**SELECTION**

Nominal Hole Size		Standard Tool Diameter Number (STDN)		Starting Hole Diameter (inch) +0.0005 / -0.0025	Finished Hole Diameter (inch)	
Standard	Oversize	Nominal	Oversize		Minimum	Maximum
1/8		B1267		0.1250	0.1267	0.1295
	9/64 5/32 11/64		B1423 B1580 B1737	0.1406 0.1562 0.1719	0.1423 0.1580 0.1737	0.1451 0.1608 0.1765
3/16		B1894		0.1875	0.1894	0.1922
	13/64 7/32 15/64		B2050 B1580 B1737	0.2031 0.2187 0.2344	0.2050 0.2206 0.2364	0.2078 0.2234 0.2392
1/4		B2520		0.2500	0.2520	0.2548
	17/64 9/32 19/64		B2676 B2833 B2990	0.2656 0.2812 0.2969	0.2676 0.2833 0.2990	0.2704 0.2861 0.3018
5/16		B3145		0.3125	0.3145	0.3175
	21/64 11/32 23/64		B3301 B3458 B3615	0.3281 0.3437 0.3594	0.3301 0.3458 0.3615	0.3331 0.3488 0.3647
3/8		B3771		0.3750	0.3771	0.3803
	25/64 13/32 27/64		B3928 B4083 B4241	0.3906 0.4062 0.4219	0.3928 0.4083 0.4241	0.3960 0.4117 0.4275
7/16		B4396		0.4375	0.4396	0.4432
	29/64 15/32 31/64		B4551 B4708 B4865	0.4531 0.4687 0.4844	0.4551 0.4708 0.4865	0.4589 0.4746 0.4905
1/2		B5020		0.5000	0.5020	0.5064
	33/64 17/32 35/64		B5176 B5332 B5489	0.5156 0.5312 0.5469	0.5176 0.5332 0.5489	0.5220 0.5376 0.5533
9/16		B5647		0.5625	0.5647	0.5691
	37/64 19/32 39/64		B5803 B5959 B6116	0.5781 0.5937 0.6094	0.5803 0.5959 0.6116	0.5847 0.6003 0.6160

Continued on next page...

# 4.3 STDN TOOL DIAMETER SELECTION

**Table 4.3A (Continued)**  
**BAC 5973 Class II Cold Working Requirements for  
Bolts and Open Holes**

Nominal Hole Size		Standard Tool Diameter Number (STDN)		Starting Hole Diameter (inch) +0.0005 / -0.0025	Finished Hole Diameter (inch)	
Standard	Oversize	Nominal	Oversize		Minimum	Maximum
5/8		B6272		0.6250	0.6272	0.6316
	41/64 21/32 43/64		B6429 B6585 B6742	0.6406 0.6562 0.6719	0.6429 0.6585 0.6742	0.6473 0.6629 0.6786
11/16		B6899		0.6875	0.6899	0.6943
	45/64 23/32 47/64		B7055 B7212 B7369	0.7031 0.7187 0.7344	0.7055 0.7212 0.7369	0.7099 0.7256 0.7413
3/4		B7525		0.7500	0.7525	0.7571
	49/64 25/32 51/64		B7681 B7837 B7995	0.7656 0.7812 0.7969	0.7681 0.7837 0.7995	0.7727 0.7883 0.8041
13/16		B8151		0.8125	0.8151	0.8197
	53/64 27/32 55/64		B8307 B8464 B8621	0.8281 0.8437 0.8594	0.8307 0.8464 0.8621	0.8353 0.8510 0.8667
7/8		B8778		0.8750	0.8778	0.8824
	57/64 29/32 59/64		B8934 B9091 B9248	0.8906 0.9062 0.9219	0.8934 0.9091 0.9248	0.8980 0.9137 0.9294
15/16		B9404		0.9375	0.9404	0.9452
	61/64 31/32 63/64		B9560 B9716 B9874	0.9531 0.9687 0.9844	0.9560 0.9716 0.9874	0.9608 0.9764 0.9922
1		B10030		1.0000	1.0030	1.0078
	1-1/64 1-1/32		B10187 B10343	1.0156 1.0312	1.0187 1.0343	1.0235 1.0391

## 4.3 STDN TOOL DIAMETER SELECTION

**Table 4.3B**  
**BAC 5973 Class II Cold Working Requirements for**  
**Hex-Drive Bolts and Lock Bolts**

Nominal Hole Size		Standard Tool Diameter Number (STDN)		Starting Hole Diameter (inch) +0.0005 / -0.0025	Finished Hole Diameter (inch)	
Standard	Oversize	Nominal	Oversize		Minimum	Maximum
3/16		H1870		0.1855	0.187	0.190
	13/64 7/32		H2000 H2160	0.1985 0.2130	0.200 0.216	0.203 0.219
1/4		H2470		0.2455	0.247	0.250
	17/64 9/32		H2630 H2780	0.2615 0.2750	0.263 0.278	0.266 0.281
5/16		H3090		0.3080	0.309	0.313
	21/64 11/32		H3250 H3410	0.3230 0.3380	0.325 0.341	0.328 0.344
3/8		H3710		0.3695	0.371	0.375
	25/64 13/32		H3880 H4030	0.3865 0.4015	0.388 0.403	0.391 0.406
7/16		H4340		0.4310	0.434	0.438
	29/64 15/32		H4500 H4660	0.4460 0.4625	0.450 0.466	0.453 0.469

**Table 4.3C**  
**BAC 5973 Class II Cold Working Requirements for**  
**Rivet Holes**

Nominal Hole Size		Standard Tool Diameter Number (STDN)		Starting Hole Diameter (inch) +0.0005 / -0.0025	Finished Hole Diameter (inch)	
Standard	Oversize	Nominal	Oversize		Minimum	Maximum
1/8		R1280		0.1270	0.128	0.1310
	5/32		R1590	0.1580	0.159	0.1620
3/16		R1900		0.1890	0.190	0.1950
	7/32		R2200	0.2185	0.220	0.2345
1/4		R2530		0.2520	0.253	0.2570
	9/32		R2830	0.2810	0.283	0.2860
5/16		R3170		0.3140	0.371	0.3205
	11/32		R3450	0.3435	0.345	0.3480
3/8		R3780		0.3750	0.378	0.3820
	13/32		R4080	0.4060	0.408	0.4120
7/16		R4410		0.4365	0.441	0.4440

## 4.4 ORDERING EXAMPLES

### EXAMPLE #1

Requirement:

Low interference coldwork 1/4-inch nominal open hole in 1/2-inch thick aluminum; unrestricted access.

1. Select STDN from Table 4.3A: B2520.
2. Order standard tooling as per instructions on page 141 of this section.

Puller ..... LB-20  
PowerPak ..... FT-20 or FT-200  
Starting Drill ..... CWSD-B2520-1  
Starting Reamer ..... CWSR-B2520-1  
Mandrel ..... CWM-B2520-1-20-V1  
Split Sleeves ..... CWS-B2520-16F  
Nosecap ..... CBC-11-08F  
Combination Gage ..... CWG-B2520

### EXAMPLE #2

Requirement:

Low interference coldwork 3/8-inch (1/32-oversize) hole intended for a rivet.

1. Select STDN from Table 4.3C: R4080.
2. Order standard tooling as per instructions on page 141 of this section.

Puller ..... LB-20  
PowerPak ..... FT-20 or FT-200  
Starting Drill ..... CWSD-R4080-1  
Starting Reamer ..... CWSR-R4080-1  
Mandrel ..... CWM-R4080-1-20-V1  
Split Sleeves ..... CWS-R4080-16F  
Nosecap ..... CBC-12-12F  
Combination Gage ..... CWG-R4080


# 4.5 MANDREL PART NUMBER CROSS REFERENCE

There have been three changes to the standard mandrel part numbering system:

1. The (IW MF, IW LB, IW MB, IW BB) prefixes have been deleted.
2. The V1 material callout for aluminum cold expansion has been added.
3. The attachment callout has changed (see below).

## OLD PART NUMBER:

### Model Number Key:

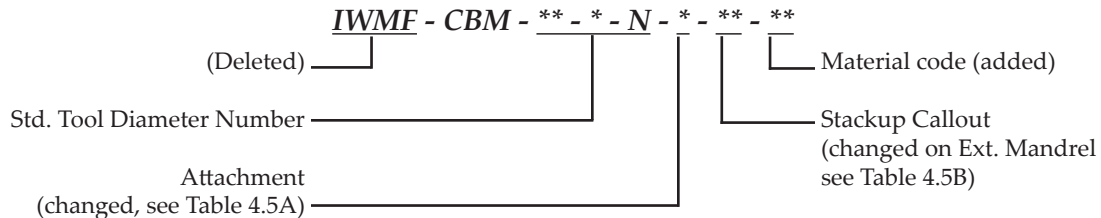

**Table 4.5A  
Attachments Callouts**

New Attachment Callout	Attachment Description			Old Attachment Callout
1	7/16 - 20	1 piece	threaded	1AB
2	5/8 - 18	1 piece	threaded	5
3	0.960"	1 piece	tang	6
4	7/8 - 14	2 piece	threaded	4
5	7/8 - 14	1 piece	threaded	3

The extension mandrel stackup (length) callouts have been simplified; refer to Table 4.5B.


**Table 4.5B  
Attachments Callouts for Stackups**

Old Stackup Callout	New Stackup Callout
10E4	30
10E5	35
10E6	40
15E4	35
15E5	40
15E6	45
20E4	40
20E5	45
20E6	50


**4.6  
STANDARD  
NOSECAP  
PART NUMBER  
CROSS  
REFERENCE**

**OLD PART NUMBER:**

**Model Number Key:**

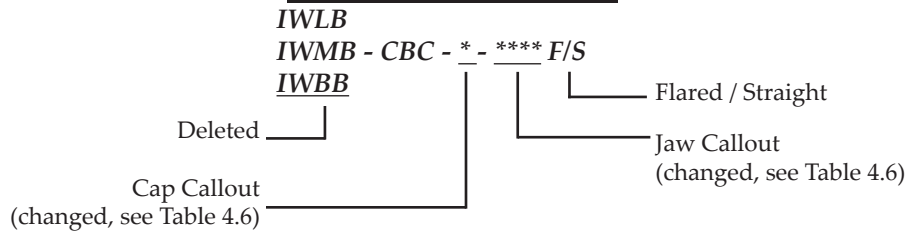

**NEW PART NUMBER:**

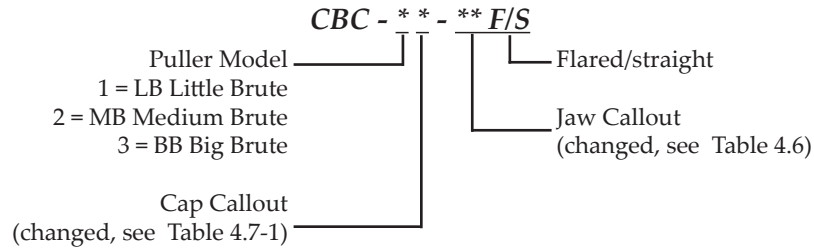

**Table 4.6  
Nosecap Part Number Cross Reference**

LB Nosecaps			
Nominal Size	Puller	New Part Number	Old Part Number
5/32 - 3/16	LB	CBC-11-06F/S	IWLB-CBC-1-0507F/S
1/4	LB	CBC-11-08F/S	IWLB-CBC-1-0809F/S
5/16	LB	CBC-11-10F/S	IWLB-CBC-1-1011F/S
3/8	LB	CBC-12-12F/S	IWLB-CBC-2-1213F/S
7/16	LB	CBC-12-14F/S	IWLB-CBC-2-1416F/S
1/2	LB	CBC-13-16F/S	IWLB-CBC-2-1416F/S*
MB Nosecaps			
Nominal Size	Puller	New Part Number	Old Part Number
3/8	MB	CBC-22-12F/S	IWMB-CBC-2-1213F/S
7/16	MB	CBC-22-14F/S	IWMB-CBC-2-1416F/S
1/2	MB	CBC-23-16F/S	IWMB-CBC-2-1416F/S
9/16	MB	CBC-23-18F/S	IWMB-CBC-3-1821F/S
5/8	MB	CBC-23-20F/S	IWMB-CBC-3-1821F/S
11/16	MB	CBC-24-22F/S	IWMB-CBC-3-2225F/S
3/4	MB	CBC-24-24F/S	IWMB-CBC-3-2225F/S
13/16	MB	CBC-24-26F/S	IWMB-CBC-4-2629F/S
7/8	MB	CBC-25-28F/S	IWMB-CBC-4-2629F/S
15/16	MB	CBC-25-30F/S	IWMB-CBC-4-3032F/S
1	MB	CBC-25-32F/S	IWMB-CBC-4-3032F/S
1-1/16	MB	CBC-25-34F/S	-----
1-1/8	MB	CBC-25-36F/S	-----
BB Nosecaps			
Nominal Size	Puller	New Part Number	Old Part Number
1	BB	CBC-31-32F/S	IWBB-CBC-1-3233F/S
1-1/16	BB	CBC-31-34F/S	IWBB-CBC-1-3435F/S
1-3/16	BB	CBC-31-38F/S	IWBB-CBC-1-3839F/S
1-1/4	BB	CBC-31-40F/S	IWBB-CBC-1-4041F/S
1-5/16	BB	CBC-32-42F/S	IWBB-CBC-2-4243F/S
1-3/8	BB	CBC-32-44F/S	IWBB-CBC-2-4445F/S
1-7/16	BB	CBC-32-46F/S	IWBB-CBC-2-4647F/S
1-1/2	BB	CBC-32-48F/S	IWBB-CBC-2-4849F/S
1-9/16	BB	CBC-33-50F/S	IWBB-CBC-3-5051F/S
1-5/8	BB	CBC-33-52F/S	IWBB-CBC-3-5253F/S
1-11/16	BB	CBC-33-54F/S	IWBB-CBC-3-5455F/S
1/3/4	BB	CBC-33-56F/S	IWBB-CBC-3-5657F/S

\* Incompatible with 16-1, 16-2, and 16-3 mandrels.

- UNCONTROLLED IF PRINTED -

---


# CA TOOLING FOR CX IN TITANIUM AND HIGH STRENGTH STEEL

## 5.0 CA TOOLING

Section	Page
5.1	Process Description ..... 144
5.2	Process Overview ..... 145
5.3	STDN Selection Table For New Holes ..... 146
5.4	STDN Selection Table For Rework of Existing Holes ..... 148
5.5	Standard Tooling ..... 150

For complete CA Tooling specifications please visit our online technical library at [www.fatiguetechnology.com/technical-library.asp](http://www.fatiguetechnology.com/technical-library.asp) and download FTI Spec 8101, or contact your nearest FTI Representative. Product specifications include a system overview, structure requirements, installation procedure, and a tooling selection guide.

## 5.1 PROCESS DESCRIPTION

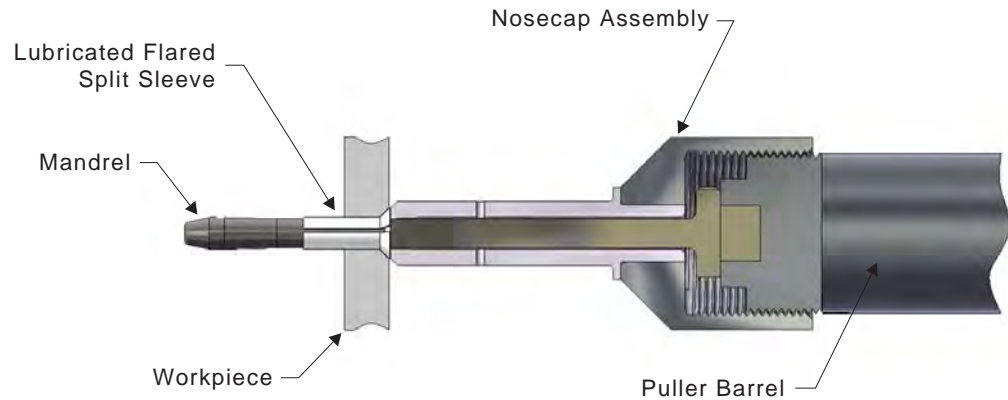


**Figure 5.1**  
**CA System Components**

The CA series of Split Sleeve Cold Expansion (SsCx) tooling is designed to cold expand holes in titanium and high strength steels (up to 160 ksi). A slightly higher applied expansion, as compared to the CB series of tooling for aluminum, is specified for these materials; requiring special high strength mandrels. This system of tooling is used for both production and rework applications and has been called out for several aircraft service bulletins.

CA tooling is available in nominal and 1/64-inch oversize hole diameters between 1/8 and 45/64 inch. Final hole diameters greater than 45/64 inch require special 2-sided cold expansion tooling and may require applied expansions specifically tailored to the particular application. For special applications or sizes not covered in this Tool Catalog, please contact our Customer Service Department for assistance.

## 5.2 PROCESS OVERVIEW

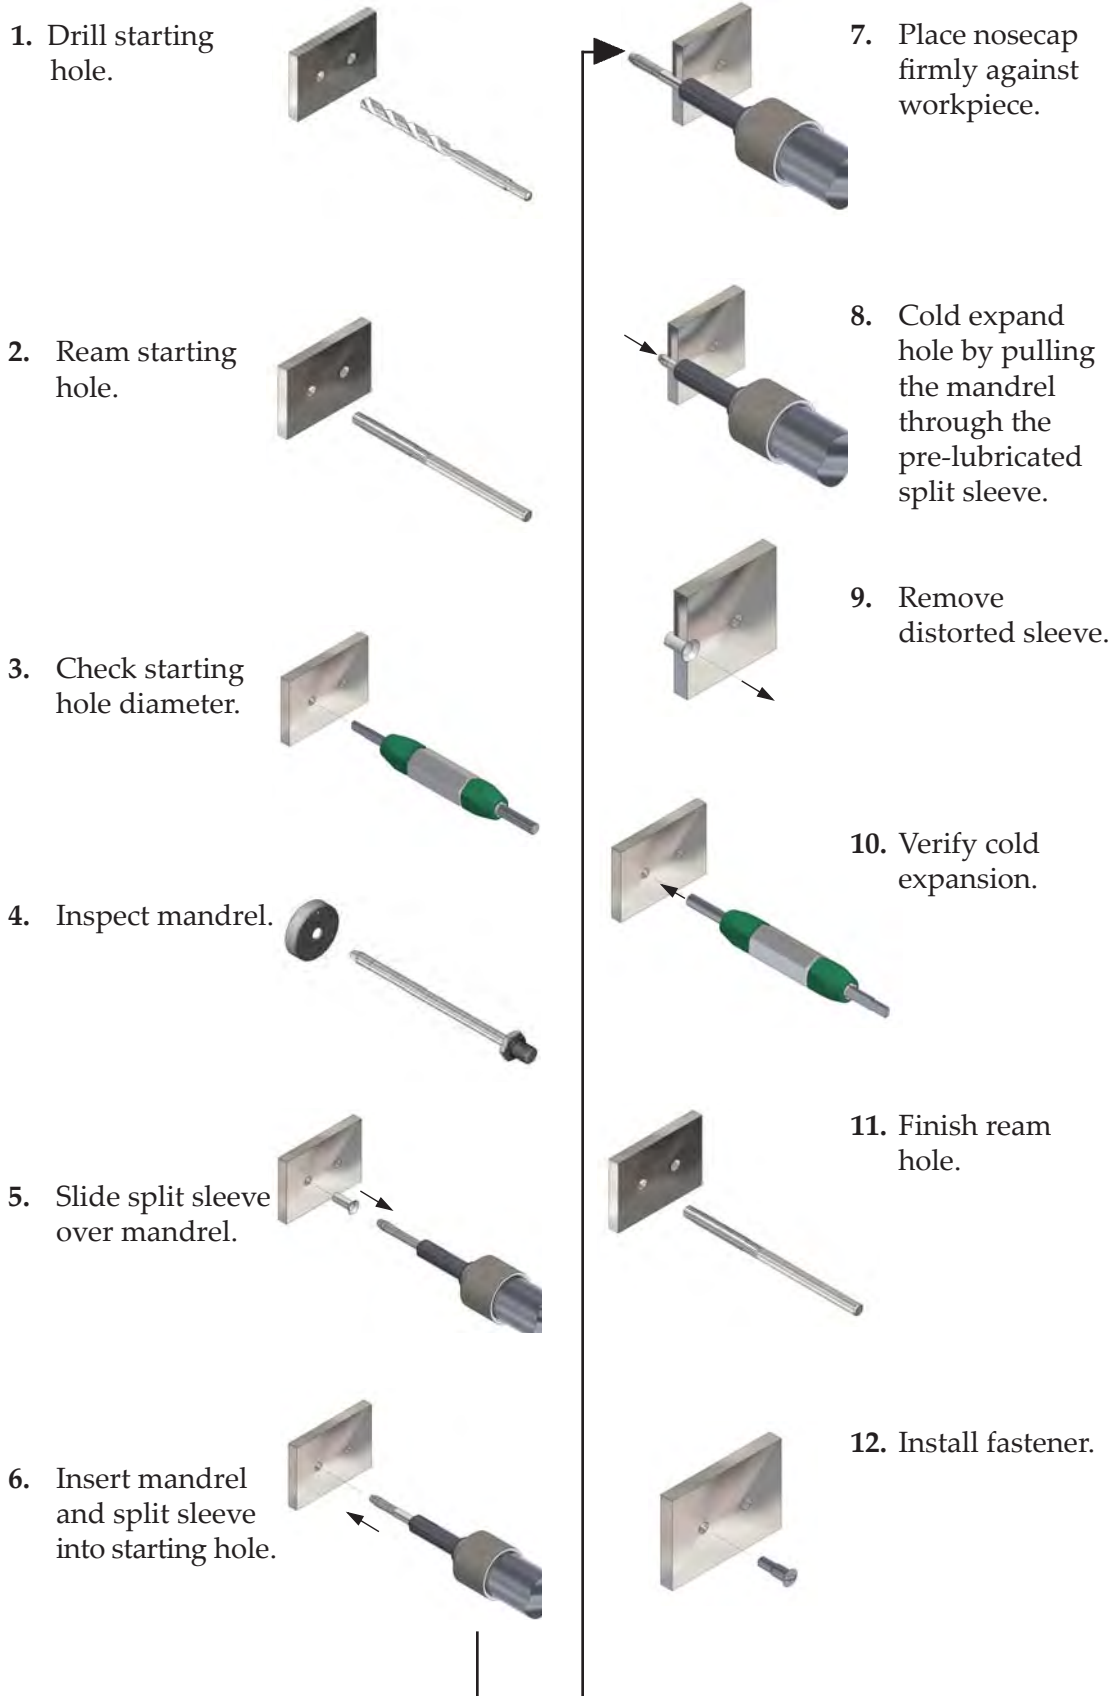

- UNCONTROLLED IF PRINTED -

**5.3  
STDN  
SELECTION  
TABLE FOR  
NEW HOLES**

**HOW TO SELECT THE STANDARD TOOL DIAMETER NUMBER:**

1. Determine the final fastener diameter in Column 1.
2. Move across to Column 2 to select the proper STDN.
3. Using this STDN, select the proper set of tooling from Tables 5.5A and 5.5B.

**Note:** For metric conversions refer to Table A.2 in the Appendix.

**Table 5.3A  
CA Tooling STDN Selection for New Holes**

Reference Final Fastener	Standard Tool Diameter Number (STDN)	Starting Hole Diameter (inch)		Maximum Allowable Finished Hole Diameter (inch)
		Minimum	Maximum	
1/8	20	.110	.112	.1331
9/64	21	.125	.127	.1513
5/32	22	.140	.142	.1694
11/64	23	.156	.158	.1888
3/16	30	.170	.172	.2040
13/64	31	.185	.187	.2220
7/32	32	.200	.202	.2400
15/64	33	.216	.218	.2592
1/4	40	.231	.234	.2726
17/64	41	.246	.249	.2903
9/32	42	.261	.264	.3080
19/64	43	.277	.280	.3269
5/16	50	.287	.290	.3358
21/64	51	.302	.305	.3533
11/32	52	.318	.321	.3721
23/64	53	.333	.336	.3896
3/8	60	.348	.351	.4037
25/64	61	.363	.366	.4211
13/32	62	.379	.382	.4396
27/64	63	.394	.397	.4570

Continued on next page...

## HOW TO SELECT YOUR STANDARD TOOL DIAMETER NUMBER:

1. Determine the final fastener diameter in Column 1.
2. Move across to Column 2 to select the proper STDN.
3. Using this STDN, select the proper set of tooling from Tables 5.5A and 5.5B.

**Note:** For metric conversions refer to Table A.2 in the Appendix.

## 5.3 STDN SELECTION TABLE FOR NEW HOLES

**Table 5.3A(Continued)  
CA Tooling STDN Selection for New Holes**

Reference Final Fastener	Standard Tool Diameter Number (STDN)	Starting Hole Diameter (inch)		Maximum Allowable Finished Hole Diameter (inch)
		Minimum	Maximum	
7/16	70	.409	.412	.4740
29/64	71	.424	.427	.4890
15/32	72	.440	.443	.5050
31/64	73	.455	.458	.5200
1/2	80	.470	.473	.5350
33/64	81	.486	.489	.5510
17/32	82	.501	.504	.5660
35/64	83	.516	.519	.5810
9/16	90	.531	.534	.5960
37/64	91	.547	.550	.6120
19/32	92	.562	.565	.6270
39/64	93	.577	.580	.6420
5/8	100	.592	.595	.6570
41/64	101	.608	.611	.6730
21/32	102	.623	.626	.6880
43/64	103	.638	.641	.7030
11/16	110	.653	.656	.7180
45/64	111	.669	.672	.7340

**Note:** For sizes greater than 45/64, contact FTI for technical assistance.

**5.4  
STDN  
SELECTION  
TABLE FOR  
REWORK OF  
EXISTING  
HOLES**

Table 5.4A has been designed to assist with STDN selection for existing fastener holes in rework conditions. Every aircraft manufacturer has guidelines for fastener removal, crack removal, and hole preparation that should be followed. Use this table to select an STDN using either your existing fastener or required final fastener as a guide. Note that the STDNs chosen in Column 3 have been chosen for minimal ream allowances.

**Table 5.4A  
CA Tooling STDN Selection for Rework of Existing Holes**

1 Nominal Existing Fastener Diameter (inche)	2 Allowable Existing Diameter Before Cx (inch)	3 Standard Tool Diameter Number (STDN)	4 Starting Hole Diameter		5 Final Fastener Diameter (inche)	6 Maximum Finished Hole Diameter (not to exceed) (inch)
			Minimum	Maximum		
1/8	.130	22	.140	.142		.1694
9/64	.146	23	.156	.158	11/64	.1888
5/32	.160	30	.170	.172	3/16	.2040
11/64	.175	31	.185	.187	13/64	.2220
3/16	.190	32	.200	.202	7/32	.2400
13/64	.206	33	.216	.218	15/64	.2592
7/32	.221	40	.231	.234	1/4	.2726
15/64	.236	41	.246	.249	17/64	.2903
1/4	.251	42	.261	.264	9/32	.3080
17/64	.267	43	.277	.280	19/64	.3269
17/64	.277	50	.287	.290	5/16	.3358
9/32	.292	51	.302	.305	21/64	.3533
19/64	.308	52	.318	.321	11/32	.3721
5/16	.323	53	.333	.336	23/64	.3896
21/64	.338	60	.348	.351	3/8	.4037
11/32	.353	61	.363	.366	25/64	.4211
23/64	.369	62	.379	.382	13/32	.4396

Continued on next page...

To select the STDN using Table 5.4A, use the following steps:

1. Remove the existing fastener and measure the resulting hole diameter.
2. If a minimal amount of material is to be removed, select the STDN from Column 3 that corresponds to the existing hole diameter in Column 2.
3. If you wish to install a larger required final fastener, find the final fastener size in Column 5 and select the corresponding STDN from Column 3.
4. Using the STDN, select the tooling from Tables 5.5A and 5.5B on the following pages.

**5.4  
STDN  
SELECTION  
TABLE FOR  
REWORK OF  
EXISTING  
HOLES**





**Table 5.4A(Continued)  
CA Tooling STDN Selection for Rework of Existing Holes**

1	2	3	4		5	6
Nominal Existing Fastener Diameter (inche)	Allowable Existing Diameter Before Cx (inch)	Standard Tool Diameter Number (STDN)	Starting Hole Diameter		Final Fastener Diameter (inch)	Maximum Finished Hole Diameter (not to exceed) (inch)
			Minimum	Maximum		
3/8	.384	63	.394	.397	27/64	.4570
25/64	.399	70	.409	.412	7/16	.4740
13/32	.414	71	.424	.427	29/64	.4890
27/64	.430	72	.440	.443	15/32	.5050
7/16	.445	73	.455	.458	31/64	.5200
29/64	.460	80	.470	.473	1/2	.5350
15/32	.476	81	.486	.489	33/64	.5510
31/64	.491	82	.501	.504	17/32	.5660
1/2	.506	83	.516	.519	35/64	.5810
33/64	.521	90	.531	.534	9/16	.5960
17/32	.537	91	.547	.550	37/64	.6120
35/64	.552	92	.562	.565	19/32	.6270
9/16	.567	93	.577	.580	39/64	.6420
37/64	.582	100	.592	.595	5/8	.6570
19/32	.598	101	.608	.611	41/64	.6730
39/64	.613	102	.623	.626	21/32	.6880
5/8	.628	103	.638	.641	43/64	.7030
41/64	.643	110	.653	.656	11/16	.7180
21/32	.659	111	.669	.672	45/64	.7340

## 5.5 STANDARD TOOLING

1. To select a Standard Tool Diameter Number refer to Table 5.3A or 5.4A.
2. With the STDN, select the system of Standard Tooling from Table 5.5A.
3. Refer to Section 2.0, Detailed Tooling for complete description of part.
4. Replace \*\*\*\* in gage finish reamer model number with the minimum final hole diameter.

**Table 5.5A**  
**Standard CA Tooling**





1	2	3	4	5
Standard Tool Diameter Number (STDN)	 Starting Drill	 Starting Reamer	 Combination Gage	 Mandrel Gage
20	CASD-20-1	CASR-20-1	CAG-20	CAMG-20
21	CASD-21-1	CASR-21-1	CAG-21	CAMG-21
22	CASD-22-1	CASR-22-1	CAG-22	CAMG-22
23	CASD-23-1	CASR-23-1	CAG-23	CAMG-23
30	CASD-30-1	CASR-30-1	CAG-30	CAMG-30
31	CASD-31-1	CASR-31-1	CAG-31	CAMG-31
32	CASD-32-1	CASR-32-1	CAG-32	CAMG-32
33	CASD-33-1	CASR-33-1	CAG-33	CAMG-33
40	CASD-40-1	CASR-40-1	CAG-40	CAMG-40
41	CASD-41-1	CASR-41-1	CAG-41	CAMG-41
42	CASD-42-1	CASR-42-1	CAG-42	CAMG-42
43	CASD-43-1	CASR-43-1	CAG-43	CAMG-43
50	CASD-50-1	CASR-50-1	CAG-50	CAMG-50
51	CASD-51-1	CASR-51-1	CAG-51	CAMG-51
52	CASD-52-1	CASR-52-1	CAG-52	CAMG-52
53	CASD-53-1	CASR-53-1	CAG-53	CAMG-53

\* All CA cutting tools are cobalt, unless otherwise specified.

Continued on next page...

# 5.5 STANDARD TOOLING

**Table 5.5A(Continued)  
Standard CA Tooling**

	6	7	8	9
Standard Tool Diameter Number (STDN)	 Flared Sleeve	 Mandrel	 Nosecap Assembly	 Gage Finish Reamer
20	CAS-20-16F	CAM-20-1-30-V2	MEN-14A-0401F	CAR-20-1-.****
21	CAS-21-16F	CAM-21-1-30-V2	MEN-14A-0401F	CAR-21-1-.****
22	CAS-22-16F	CAM-22-1-30-V2	MEN-14A-0423F	CAR-22-1-.****
23	CAS-23-16F	CAM-23-1-30-V2	MEN-14A-0423F	CAR-23-1-.****
30	CAS-30-16F	CAM-30-1-30-V2	MEN-14A-0601F	CAR-30-1-.****
31	CAS-31-16F	CAM-31-1-30-V2	MEN-14A-0601F	CAR-31-1-.****
32	CAS-32-16F	CAM-32-1-30-V2	MEN-14A-0623F	CAR-32-1-.****
33	CAS-33-16F	CAM-33-1-30-V2	MEN-14A-0623F	CAR-33-1-.****
40	CAS-40-16F	CAM-40-1-40-V2	MEN-14A-0801F	CAR-40-1-.****
41	CAS-41-16F	CAM-41-1-40-V2	MEN-14A-0801F	CAR-41-1-.****
42	CAS-42-16F	CAM-42-1-40-V2	MEN-14A-0823F	CAR-42-1-.****
43	CAS-43-16F	CAM-43-1-40-V2	MEN-14A-0823F	CAR-43-1-.****
50	CAS-50-16F	CAM-50-1-40-V2	MEN-14A-1001F	CAR-50-1-.****
51	CAS-51-16F	CAM-51-1-40-V2	MEN-14A-1001F	CAR-51-1-.****
52	CAS-52-16F	CAM-52-1-40-V2	MEN-14A-1023F	CAR-52-1-.****
53	CAS-53-16F	CAM-53-1-40-V2	MEN-14A-1023F	CAR-53-1-.****

\* All CA cutting tools are cobalt.

\*\*\*\* Denotes final hole diameter to be determined by customer.

## 5.5 STANDARD TOOLING

1. To select a Standard Tool Diameter Number refer to Table 5.3A and 5.4A.
2. With the STDN, select the system of Standard Tooling from Table 5.5B.
3. Refer to Section 2.0, Detailed Tooling for complete description of part.
4. Replace \*\*\*\* in gage finish reamer model number with the minimum final hole diameter.

**Note:** This tooling may not be maintained in stock.

**Note:** STDN 60 and above use CBCE nose cap assemblies as indicated.

**Table 5.5B  
Standard CA Tooling**





1	2	3	4	5
Standard Tool Diameter Number (STDN)	Starting Drill	Starting Reamer	Combination Gage	Mandrel Gage
60	CASD-60-1	CASR-60-1	CAG-60	CAMG-60
61	CASD-61-1	CASR-61-1	CAG-61	CAMG-61
62	CASD-62-1	CASR-62-1	CAG-62	CAMG-62
63	CASD-63-1	CASR-63-1	CAG-63	CAMG-63
70	CASD-70-1	CASR-70-1	CAG-70	CAMG-70
71	CASD-71-1	CASR-71-1	CAG-71	CAMG-71
72	CASD-72-1	CASR-72-1	CAG-72	CAMG-72
73	CASD-73-1	CASR-73-1	CAG-73	CAMG-73
80	CASD-80-1	CASR-80-1	CAG-80	CAMG-80
81	CASD-81-1	CASR-81-1	CAG-81	CAMG-81
82	CASD-82-1	CASR-82-1	CAG-82	CAMG-82
83	CASD-83-1	CASR-83-1	CAG-83	CAMG-83
90	CASD-90-1	CASR-90-1	CAG-90	CAMG-90
91	CASD-91-1	CASR-91-1	CAG-91	CAMG-91
92	CASD-92-1	CASR-92-1	CAG-92	CAMG-92
93	CASD-93-1	CASR-93-1	CAG-93	CAMG-93
100	CASD-100-1	CASR-100-1	CAG-100	CAMG-100
101	CASD-101-1	CASR-101-1	CAG-101	CAMG-101
102	CASD-102-1	CASR-102-1	CAG-102	CAMG-102
103	CASD-103-1	CASR-103-1	CAG-103	CAMG-103
110	CASD-110-1	CASR-110-1	CAG-110	CAMG-110
111	CASD-111-1	CASR-111-1	CAG-111	CAMG-111

\* All CA cutting tools are cobalt, unless otherwise specified.

Continued on next page...

# 5.5 STANDARD TOOLING

**Table 5.5B(Continued)  
Standard CA Tooling**

	6	7	8	9
<b>Standard Tool Diameter Number (STDN)</b>	 <b>Flared Sleeve</b>	 <b>Mandrel</b>	 <b>Nosecap Assembly</b>	 <b>Gage Finish Reamer</b>
60	CAS-60-16F	CAM-60-2-60-V2	MEN-26B-1201F	CAR-60-1-.****
61	CAS-61-16F	CAM-61-2-60-V2	MEN-26B-1201F	CAR-61-1-.****
62	CAS-62-16F	CAM-62-2-60-V2	MEN-26B-1223F	CAR-62-1-.****
63	CAS-63-16F	CAM-63-2-60-V2	MEN-26B-1223F	CAR-63-1-.****
70	CAS-70-16F	CAM-70-2-60-V2	MEN-26B-1401F	CAR-70-1-*.****
71	CAS-71-16F	CAM-71-2-60-V2	MEN-26B-1401F	CAR-71-1-.****
72	CAS-72-16F	CAM-72-2-60-V2	MEN-26B-1423F	CAR-72-1-.****
73	CAS-73-16F	CAM-73-2-60-V2	MEN-26B-1423F	CAR-73-1-.****
80	CAS-80-16F	CAM-80-2-60-V2	MEN-26B-1601F	CAR-80-1-.****
81	CAS-81-16F	CAM-81-2-60-V2	MEN-26B-1601F	CAR-81-1-.****
82	CAS-82-16F	CAM-82-2-60-V2	MEN-26B-1623F	CAR-82-1-.****
83	CAS-83-16F	CAM-83-2-60-V2	MEN-26B-1623F	CAR-83-1-.****
90	CAS-90-16F	CAM-90-2-60-V2	MEN-26B-1801F	CAR-90-1-.****
91	CAS-91-16F	CAM-91-2-60-V2	MEN-26B-1801F	CAR-91-1-.****
92	CAS-92-16F	CAM-92-2-60-V2	MEN-26B-1823F	CAR-92-1-.****
93	CAS-93-16F	CAM-93-2-60-V2	MEN-26B-1823F	CAR-93-1-.****
100	CAS-100-16F	CAM-100-2-60-V2	MEN-26B-2001F	CAR-100-1-.****
101	CAS-101-16F	CAM-101-2-60-V2	MEN-26B-2001F	CAR-101-1-.****
102	CAS-102-16F	CAM-102-2-60-V2	MEN-26C-2023F	CAR-102-1-.****
103	CAS-103-16F	CAM-103-2-60-V2	MEN-26C-2023F	CAR-103-1-.****
110	CAS-110-16F	CAM-110-2-60-V2	MEN-26C-2201F	CAR-110-1-.****
111	CAS-111-16F	CAM-111-2-60-V2	MEN-26C-2201F	CAR-111-1-.****

\* All CA cutting tools are cobalt.

\*\*\*\* Denotes final hole diameter to be determined by customer.



*This page intentionally left blank  
for two-sided printing*


**CR TOOLING FOR REWORK CX  
IN ALUMINUM AND MILD STEEL**

**6.0  
CR TOOLING**

<b>Section</b>		<b>Page</b>
6.1	Process Description .....	156
6.2	Process Overview.....	157
6.3	STDN Selection Table .....	158
6.4	Standard Tooling .....	159
6.5	Countersink Tooling .....	160

For additional information on CR Tooling specifications please contact your nearest FTI Representative.

## 6.1 PROCESS DESCRIPTION

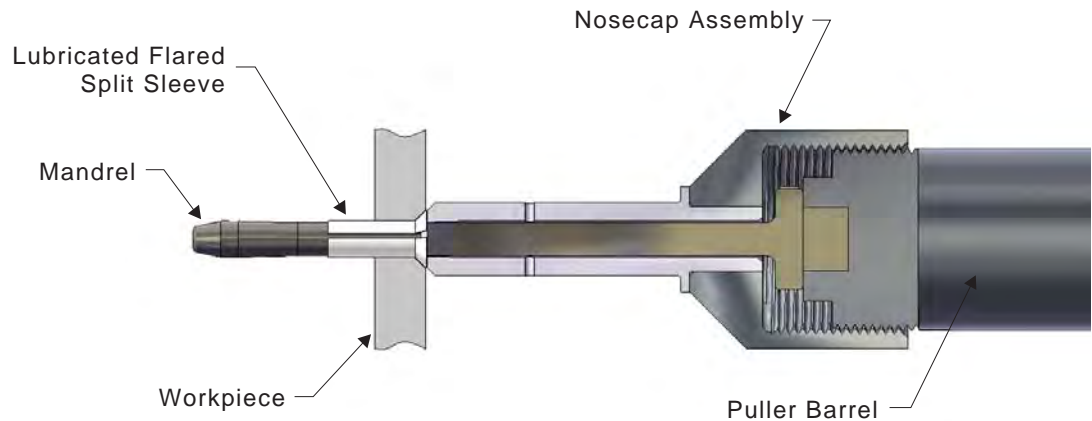


**Figure 6.1-1**  
**Rework Cold Expansion System Components**

The Rework Cold Expansion (RwCx) tooling system, CR series, was specifically designed for rework applications. However, CR series tooling is also acceptable for new holes in the 3/16 to 3/8-inch diameter range. A system of standard tooling for nominal starting hole diameters has been developed for this split sleeve hole expansion process to simplify the procedure and minimize tooling inventory. (Use of RwCx tooling for new holes is the same as that described for the standard SsCx process using CB tooling.)

In rework, the procedure involves the removal of fasteners, clean up of the hole (and Non Destructive Inspection if applicable), pre-sizing the hole, split sleeve cold expansion, and post-sizing of the hole to accept a nominal 1/32-inch oversize fastener. Previously countersunk holes must be cold expanded using the special CsCx noscap and straight sleeves.

A special tooling kit of durable and expendable CR tooling required to cold expand the most common hole sizes in aluminum structures may be purchased in a special Cold Expansion Overhaul and Repair Kit (CXORK-2A).

## 6.2 PROCESS OVERVIEW

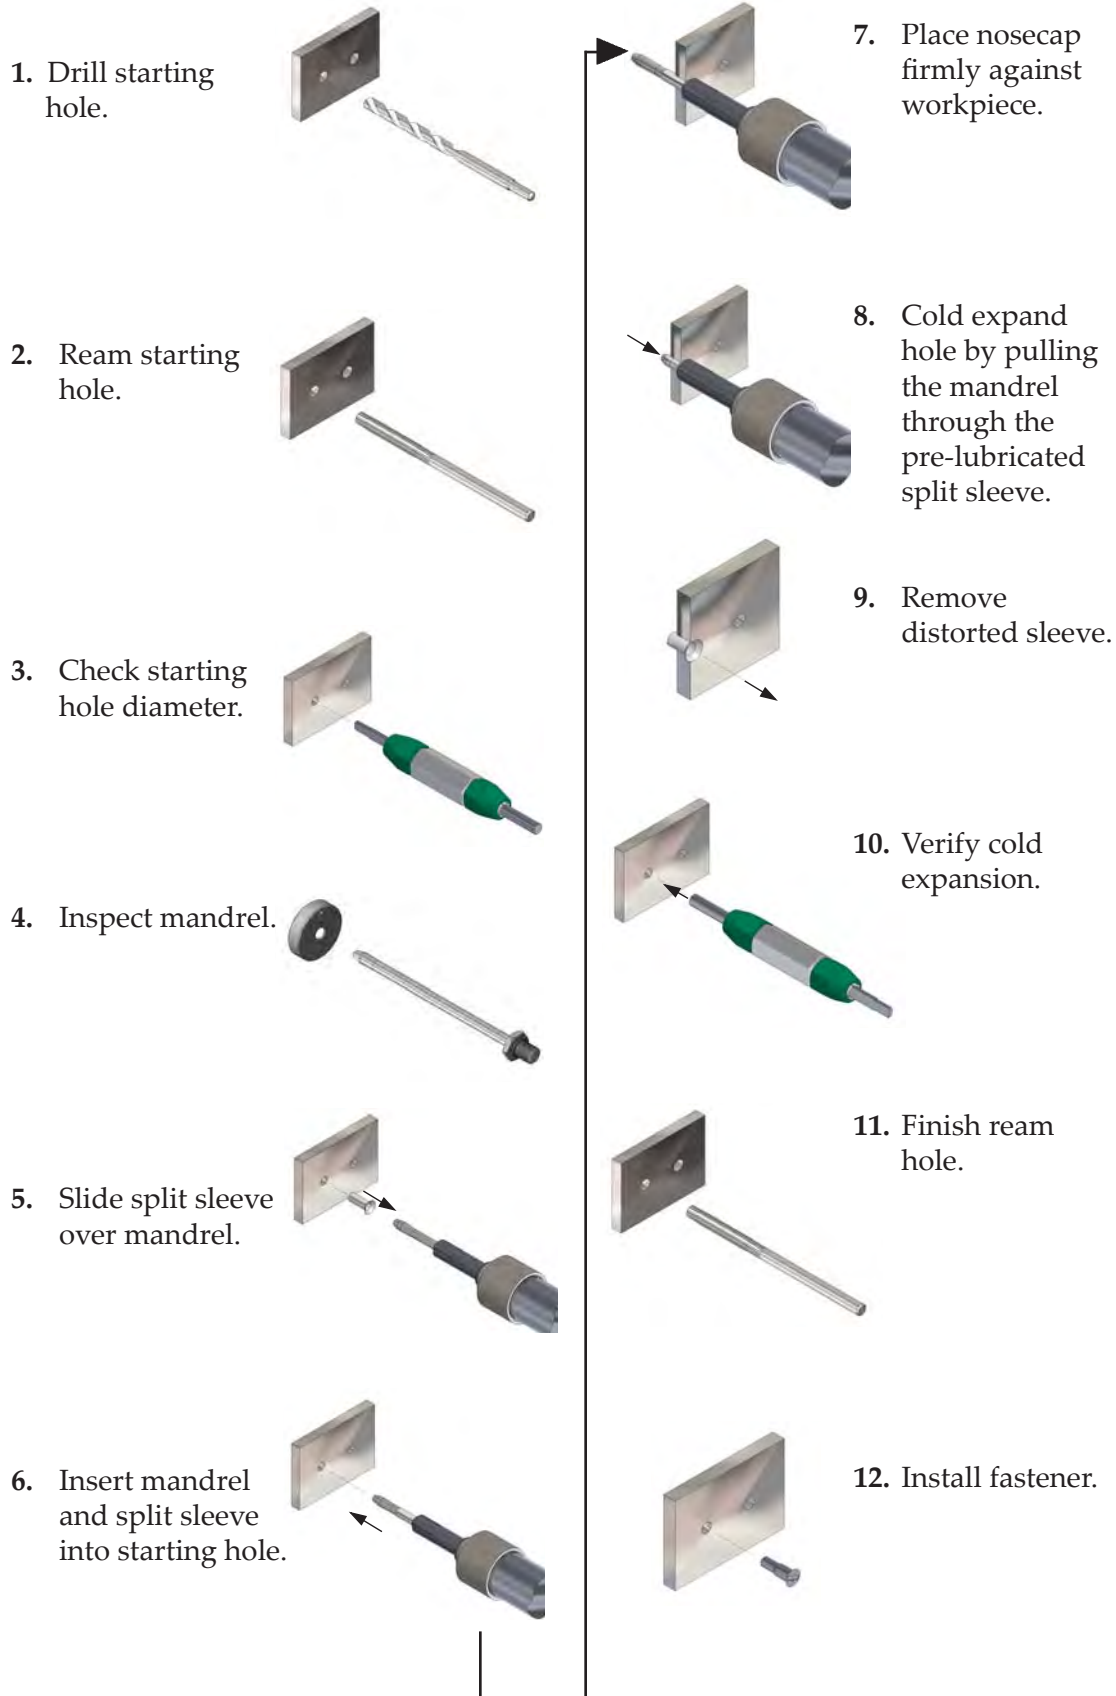

- UNCONTROLLED IF PRINTED -

CR Tooling  
Page 157

**6.3  
STDN  
SELECTION  
TABLE**

**HOW TO SELECT THE STANDARD TOOL DIAMETER NUMBER:**

1. Determine the final fastener diameter (1), or the existing fastener diameter (4).
2. Select the applicable size from Table 6.3A.
3. Move across to the Standard Tool Diameter Number (STDN) (3).
4. With STDN go to Table 6.4A to determine the proper set of tooling.






**Table 6.3A  
CR Tooling STDN Selection**




Reference Final Fastener (inch)	Final Hole Diameter Range (inch)	Standard Tool Diameter Number (inch)	Existing Fastener Diameter (inch)	Maximum Existing Hole Diameter (inch)	Minimum Starting Hole Diameter	Maximum Starting Hole Diameter
3/16	.182 to .192	R30	5/32	.164	.169	.171
7/32	.214 to .224	R32	3/16	.194	.199	.202
1/4	.245 to .255	R40	13/64, 7/32	.224	.229	.232
9/32	.276 to .286	R42	1/4	.255	.260	.263
5/16	.307 to .317	R50	17/64, 9/32	.285	.290	.293
11/32	.339 to .349	R52	5/16	.317	.322	.325
3/8	.370 to .380	R60	21/64, 11/32	.347	.352	.355
13/32	.401 to .411	R62	3/8	.378	.383	.386

## 6.4 STANDARD TOOLING

1. To select a Standard Tool Diameter Number refer to Table 6.3A.
2. With the STDN, select the system of Standard Tooling from Table 6.4A.
3. Refer to Section 2.0, Detailed Tooling for complete description of parts.

**Table 6.4A  
Standard CR Tooling**

1	2	3	4	5	6
					
<b>Standard Tool Diameter Number (STDN)</b>	<b>Starting Drill</b>	<b>Starting Reamer</b>	<b>Combination Gage</b>	<b>Mandrel Gage</b>	<b>Flared Sleeve</b>
R30	CRSD-R30-1	CRSR-R30-1	CRG-R30	CRMG-R30	CRS-R30-16F
R32	CRSD-R32-1	CRSR-R32-1	CRG-R32	CRMG-R32	CRS-R32-16F
R40	CRSD-R40-1	CRSR-R40-1	CRG-R40	CRMG-R40	CRS-R40-16F
R42	CRSD-R42-1	CRSR-R42-1	CRG-R42	CRMG-R42	CRS-R42-16F
R50	CRSD-R50-1	CRSR-R50-1	CRG-R50	CRMG-R50	CRS-R50-16F
R52	CRSD-R52-1	CRSR-R52-1	CRG-R52	CRMG-R52	CRS-R52-16F
R60	CRSD-R60-1	CRSR-R60-1	CRG-R60	CRMG-R60	CRS-R60-16F
R62	CRSD-R62-1	CRSR-R62-1	CRG-R62	CRMG-R62	CRS-R62-16F

7	8	9	10	
				
<b>Standard Tool Diameter Number (STDN)</b>	<b>Mandrel</b>	<b>Nosecap Assembly</b>	<b>Gage Finish Reamer*</b>	<b>Final Hole Gage**</b>
R30	CRM-R30-1-30-V1	MEN-14A-0423F	CRR-R30-1-.****	CRFG-R30-1-.****/.****
R32	CRM-R32-1-30-V1	MEN-14A-0623F	CRR-R32-1-.****	CRFG-R32-1-.****/.****
R40	CRM-R40-1-40-V1	MEN-14A-0623F	CRR-R40-1-.****	CRFG-R40-1-.****/.****
R42	CRM-R42-1-40-V1	MEN-14A-0823F	CRR-R42-1-.****	CRFG-R42-1-.****/.****
R50	CRM-R50-1-40-V1	MEN-14A-1001F	CRR-R50-1-.****	CRFG-R50-1-.****/.****
R52	CRM-R52-1-40-V1	MEN-14A-1023F	CRR-R52-1-.****	CRFG-R52-1-.****/.****
R60	CRM-R60-1-40-V1	MEN-14A-1201F	CRR-R60-1-.****	CRFG-R60-1-.****/.****
R62	CRM-R62-1-40-V1	MEN-14A-1223F	CRR-R62-1-.****	CRFG-R62-1-.****/.****





\* The diameter of the gage finish reamer, (represented by the last four digits in the model number, .\*\*\*\*) is to be specified by customer.

\*\* The go/no-go measurements of the final hole gage (represented by the last eight digits in the model number, .\*\*\*\*/.\*\*\*\*) are designed to accommodate the final hole diameter.

# 6.5 COUNTERSINK TOOLING

To cold expand pre-countersunk holes, substitute the CRM mandrel, MEN nose cap, and flared sleeve with the KRM mandrel, KRC nose cap, and straight sleeve found in Table 6.5A.

**Table 6.5A**  
**Alternative Tooling for Countersunk Holes**

1	2	3	4	5
Standard Tool Diameter Number (STDN)	 Countersink Mandrel	 Countersink Nosecap Assembly	 Straight Sleeve	 Backup Block*
R30	KRM-R30-1-35-V1	KRC-R30-1A	CRS-R30-24S	KRBB-R30-1
R32	KRM-R32-1-35-V1	KRC-R32-1A	CRS-R32-24S	KRBB-R32-1
R40	KRM-R40-1-35-V1	KRC-R40-1A	CRS-R40-24S	KRBB-R40-1
R42	KRM-R42-1-35-V1	KRC-R42-1A	CRS-R42-24S	KRBB-R42-1
R50	KRM-R50-1-35-V1	KRC-R50-1A	CRS-R50-24S	KRBB-R50-1
R52	KRM-R52-1-35-V1	KRC-R52-1A	CRS-R52-24S	KRBB-R52-1
R60	KRM-R60-1-35-V1	KRC-R60-1A	CRS-R60-24S	KRBB-R60-1
R62	KRM-R62-1-35-V1	KRC-R62-1A	CRS-R62-24S	KRBB-R62-1

\* The backup block is necessary when cold expanding countersunk holes in thin materials. Contact our Customer Service Department for more information.

---


## **Cx2s IN ALUMINUM**

# **7.0 Cx2s TOOLING**

<b>Section</b>		<b>Page</b>
7.1	Process Description .....	162
7.2	Process Overview .....	163

For additional information on Cx2s Tooling specifications please contact your nearest FTI Representative.

## 7.1 PROCESS DESCRIPTION

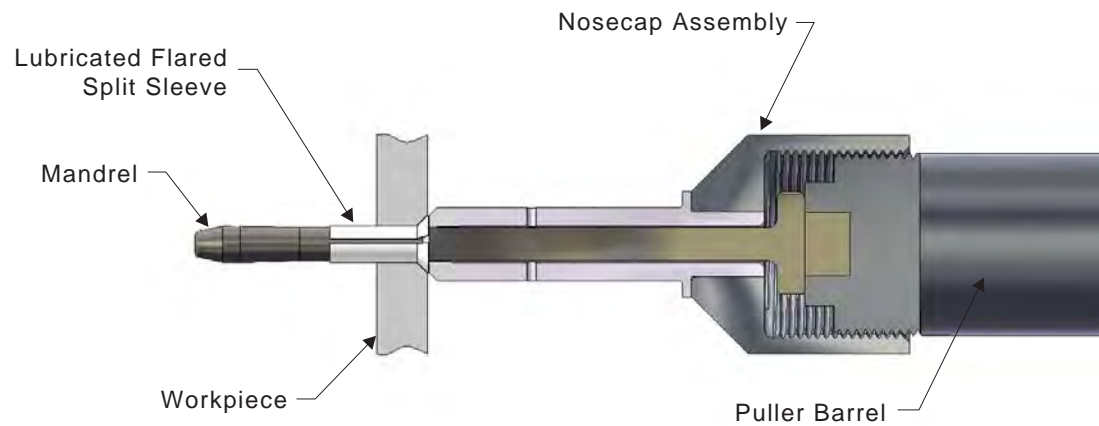

**Figure 7.1**  
**Cx2s System Components**

The Split Sleeve Cold Expansion to Size System (Cx2s) simultaneously cold expands and final sizes holes and, if required, cold expands a countersink using the CsCx nose-cap. Standard Cx2s tooling provides holes that result in specific amounts of fastener interference, or clearance, when used with standard fastener diameters (e.g., Hi-Lok™ or equivalent). Use of the Cx2s system reduces cold expansion processing to only one step, as compared to the basic Split Sleeve Cold Expansion system (SsCx). Although the Cx2s system is designed primarily for new production applications it has also been shown to be effective in rework applications. It is ideal for incorporating cold expansion into automated drilling/fastener insertion systems.

Tooling is selected based on:

1. The material(s) being cold expanded to size
2. The required fastener fit
3. The type of fastener system being used

Use of the appropriate Cx2s tooling results in a cold expanded hole with a .0015-inch total tolerance, better than that typically associated with conventional drilling/reaming operations.

FTI's Cx2s tooling that is designed to provide fastener fits in most of the common aerospace aluminum alloys. These fasteners range from high interference to clearance fit, Hi-Loks™, Huck blind bolts, and equivalent diameter fasteners for each fastener type. Fatigue Technology can design Cx2s Tooling for special applications. Contact your nearest FTI Representative for more information.

## 7.2 PROCESS OVERVIEW

1. Drill starting hole.



2. Ream starting hole.



3. Check starting hole diameter.




4. Inspect mandrel.




5. Slide split sleeve over mandrel.



6. Insert mandrel and split sleeve into starting hole.



7. Place nose cap firmly against workpiece.



8. Cold expand hole by pulling the mandrel through the pre-lubricated split sleeve.



9. Remove distorted sleeve.



10. Verify cold expansion.



11. Install fastener.



- UNCONTROLLED IF PRINTED -

Cx2s Tooling  
Page 163


**8.0**  
**CsCx**  
**TOOLING**

**CsCx IN ALUMINUM**

<b>Section</b>		<b>Page</b>
8.1	Process Description .....	165
8.2	Process Overview .....	166
8.3	STDN Selection Tables .....	167
8.4	Standard Tooling.....	170

For complete CsCx Tooling specifications please visit our online technical library at [www.fatiguetechnology.com/technical-library.asp](http://www.fatiguetechnology.com/technical-library.asp) and download FTI Spec 8101, or contact your nearest FTI Representative. Product specifications include a system overview, structure requirements, installation procedure, and a tooling selection guide.

## 8.1 PROCESS DESCRIPTION

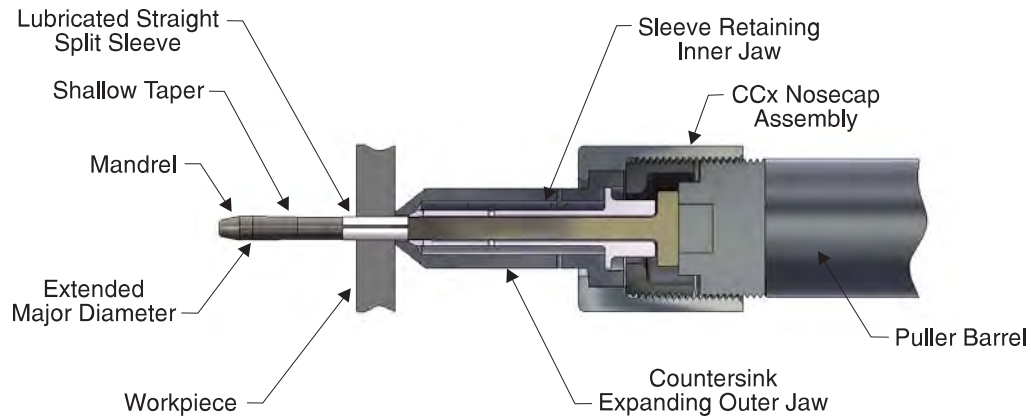














**Figure 8.1**  
**CsCx System Components**

The Countersink Cold Expansion (CsCx) system of tooling is designed to simultaneously cold expand the countersink and the straight portion of a hole in new production or rework applications. The system is designed to be used in aluminum alloys and will coldwork countersunk holes from 3/16 to 27/64 inch diameters. A special nose cap and mandrel is used to cold expand 100-degree countersinks. Use of the CsCx nose cap assembly eliminates the requirement to machine countersinks subsequent to cold expansion as required by the Split Sleeve Cold Expansion process. The desired final hole diameter is obtained by reaming of the cold expanded hole, or by use of the Split Sleeve Cold Expansion to Size (Cx2s) system.

For special applications or sizes not covered in this tooling catalog, please contact our Customer Service Department.

## 8.2 PROCESS OVERVIEW

1. Drill starting hole. 
2. Ream starting hole. 
3. Cut counter-sink. 
4. Check starting hole diameter. 
5. Inspect mandrel. 
6. Cold expand hole - slide split sleeve over mandrel. 
7. Insert mandrel and sleeve into starting hole with backup block (if necessary). 
8. Place nose cap firmly against the workpiece. 
9. Cold expand hole by pulling the mandrel through the pre-lubricated split sleeve. 
10. Remove distorted sleeve. 
11. Verify cold expansion. 
12. Final ream hole (if necessary). 
13. Install fastener. 

## 8.3 STDN SELECTION TABLES

If you are using CsCx tooling with the SsCx system, use Table 8.3A to select the STDN and Table 8.4A to select the tooling.

If you are using CsCx tooling with the Cx2s system, use Tables 8.3B to 8.3E to select the STDN and Table 8.4B to select the tooling.

1. Determine the final fastener diameter (1), or the existing fastener diameter (4).
2. Select the applicable size from Table 8.3A.
3. Move across to the Standard Tool Diameter Number (STDN) (3).
4. With the STDN go to Table 8.4A to determine system of tooling.

**Note:** For metric conversion refer to Table A.2A and A.2B in Appendix A.

**Table 8.3A**  
**CsCx Tooling STDN Selection**

Reference Final Fastener (inch)	Final Hole Diameter Range (inch)	Standard Tool Diameter Number (STDN)	Existing Fastener Diameter (inch)	Maximum Existing Hole Diameter (inch)
3/16	.183 to .193	4-4-N	5-32	.159
13/64	.198 to .208	6-0-N	5/32	.167
7/32	.214 to .224	6-1-N	11/64	.182
15/64	.229 to .239	6-2-N	3/16	.199
1/4	.245 to .255	6-3-N	13/64	.215
17/64	.261 to .271	8-0-N	7/32	.225
9/32	.276 to .286	8-1-N	15/64	.241
19/64	.292 to .302	8-2-N	1/4	.256
5/16	.308 to .318	8-3-N	17/64	.273
21/64	.323 to .333	10-0-N	9/32	.287
11/32	.339 to .349	10-1-N	19/64	.303
23/64	.354 to .364	10-2-N	5/16	.318
3/8	.370 to .380	10-3-N	21/64	.334
25/64	.386 to .396	12-0-N	11/32	.349
13/32	.401 to .411	12-1-N	23/64	.365
27/64	.417 to .427	12-2-N	3/8	.381
7/16	.433 to .443	12-3-N	25/64	.396

# 8.3 STDN SELECTION TABLES

If you are using CsCx tooling with the SsCx system, use Table 8.3A to select the STDN and Table 8.4A to select the tooling.

If you are using CsCx tooling with the Cx2s system, use Tables 8.3B to 8.3E to select the STDN and Table 8.4B to select the tooling.

## HOW TO DETERMINE THE STANDARD TOOL DIAMETER NUMBER:

1. Determine the **Material Code** based upon the material to be cold expanded to size.

**Table 8.3B  
CsCx (2s) Material Code**

Material Code	1	2	3	4	5	6	7
Applicable Material	NA	7178-T6	7075-T6 7050-T73 7150-T6	7075-T73 2014-T6	NA	2024-T3	NA

2. Determine the **Fastener Code** based upon the fastener system to be used.

**Table 8.3C  
CsCx (2s) Fastener Code**

Fastener Code	1	2	3
Applicable Material	Hi-Lok or equivalent diameter	NA	Huck blind bolts or equivalent diameter

3. Determine the **Fastener Interference Level Code** based upon the desired fastener fit.

**Table 8.3D  
CsCx (2s) Fastener Interference Level Code**

Fastener Interference Level Code	1 Light	2 High	3 Transition	4 Clearance
Maximum possible fastener interference range, inches (expected range)	.0010 to .0035 (.0015 to .0020)	.0025 to .0050 (.0030 to .0035)	.0005 to .0020 (.0000 to .0005)	.0040 to .0000 (.0015 to .0020)


4. Determine the **Fastener Diameter Code** based upon the fastener size to be used.

**Table 8.3E**  
**Fastener Diameter Code**

Reference Final Fastener	Hi-Lok or Equivalent Diameter	Huck Blind Bolt or Equivalent Diameter
1/8	40	NA
9/64	41	NA
5/32	42	42
11/64	43	43
3/16	60	60
13/64	61	61
7/32	62	NA
15/64	63	NA
1/4	80	80
17/64	81	81
9/32	82	NA
19/64	83	NA
5/16	10	100
21/64	101	101
11/32	102	NA
23/64	103	NA
3/8	120	120
25/64	121	121
13/32	122	NA
27/64	123	NA

NA = Not Applicable.

5. Construct the Cx2s STDN.

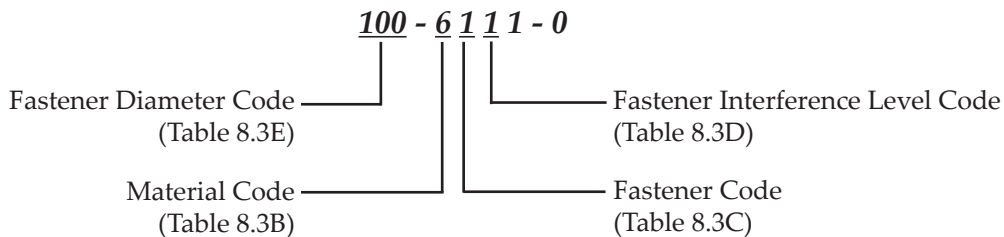






6. With the STDN, go to Table 8.4A to determine the system of tooling.

## 8.3 STDN SELECTION TABLES

# 8.4 STANDARD TOOLING

1. To select a Standard Tool Diameter Number, refer to Table 8.3A.
2. With the STDN, select the system of Standard Tooling from the table below.
3. Refer to Section 2.0 Detailed Tooling for complete description of part.
4. To replace \*\*\*, refer to the subsection on Gage Finish Reamers in Section 2.0, Detailed Tooling.





**Table 8.4A**  
**Standard CsCx Tooling**

1	2	3	4	5
				
<b>Standard Tool Diameter Number (STDN)</b>	<b>Starting Drill</b>	<b>Starting Reamer</b>	<b>Combination Gage</b>	<b>Mandrel Gage</b>
4-0-N	CBSD-4-0-N-1	CBSR-4-0-N-1	CBG-4-0-N-1	CBMG-4-0-N
4-1-N	CBSD-4-1-N-1	CBSR-4-1-N-1	CBG-4-1-N-1	CBMG-4-1-N
4-2-N	CBSD-4-2-N-1	CBSR-4-2-N-1	CBG-4-2-N-1	CBMG-4-2-N
4-3-N	CBSD-4-3-N-1	CBSR-4-3-N-1	CBG-4-3-N-1	CBMG-4-3-N
4-4-N	CBSD-4-4-N-1	CBSR-4-4-N-1	CBG-4-4-N-1	CBMG-4-4-N
6-0-N	CBSD-6-0-N-1	CBSR-6-0-N-1	CBG-6-0-N-1	CBMG-6-0-N
6-1-N	CBSD-6-1-N-1	CBSR-6-1-N-1	CBG-6-1-N-1	CBMG-6-1-N
6-2-N	CBSD-6-2-N-1	CBSR-6-2-N-1	CBG-6-2-N-1	CBMG-6-2-N
6-3-N	CBSD-6-3-N-1	CBSR-6-3-N-1	CBG-6-3-N-1	CBMG-6-3-N
8-0-N	CBSD-8-0-N-1	CBSR-8-0-N-1	CBG-8-0-N-1	CBMG-8-0-N
8-1-N	CBSD-8-1-N-1	CBSR-8-1-N-1	CBG-8-1-N-1	CBMG-8-1-N
8-2-N	CBSD-8-2-N-1	CBSR-8-2-N-1	CBG-8-2-N-1	CBMG-8-2-N
8-3-N	CBSD-8-3-N-1	CBSR-8-3-N-1	CBG-8-3-N-1	CBMG-8-3-N
10-0-N	CBSD-10-0-N-1	CBSR-10-0-N-1	CBG-10-0-N-1	CBMG-10-0-N
10-1-N	CBSD-10-1-N-1	CBSR-10-1-N-1	CBG-10-1-N-1	CBMG-10-1-N
10-2-N	CBSD-10-2-N-1	CBSR-10-2-N-1	CBG-10-2-N-1	CBMG-10-2-N
10-3-N	CBSD-10-3-N-1	CBSR-10-3-N-1	CBG-10-3-N-1	CBMG-10-3-N
12-0-N	CBSD-12-0-N-1	CBSR-12-0-N-1	CBG-12-0-N-1	CBMG-12-0-N
12-1-N	CBSD-12-1-N-1	CBSR-12-1-N-1	CBG-12-1-N-1	CBMG-12-1-N
12-2-N	CBSD-12-2-N-1	CBSR-12-2-N-1	CBG-12-2-N-1	CBMG-12-2-N
12-3-N	CBSD-12-3-N-1	CBSR-12-3-N-1	CBG-12-3-N-1	CBMG-12-3-N

Continued on next page...

# 8.4 STANDARD TOOLING

**Table 8.4A (Continued)  
Standard CsCx Tooling**





	6	7	8	9
Standard Tool Diameter Number (STDN)	 Straight Sleeve	 Countersink Mandrel	 Countersink Nosecap	 Gage Finish Reamer
4-0-N	CBS-4-0-N-24S	KBM-4-0-N-1-35-V1	KBC-040-1A	CBR-4-0-N-1-.****
4-1-N	CBS-4-1-N-24S	KBM-4-1-N-1-35-V1	KBC-041-1A	CBR-4-1-N-1-.****
4-2-N	CBS-4-2-N-24S	KBM-4-2-N-1-35-V1	KBC-042-1A	CBR-4-2-N-1-.****
4-3-N	CBS-4-3-N-24S	KBM-4-3-N-1-35-V1	KBC-043-1A	CBR-4-3-N-1-.****
4-4-N	CBS-4-4-N-24S	KBM-4-4-N-1-35-V1	KBC-044-1A	CBR-4-4-N-1-.****
6-0-N	CBS-6-0-N-24S	KBM-6-0-N-1-35-V1	KBC-060-1A	CBR-6-0-N-1-.****
6-1-N	CBS-6-1-N-24S	KBM-6-1-N-1-35-V1	KBC-061-1A	CBR-6-1-N-1-.****
6-2-N	CBS-6-2-N-24S	KBM-6-2-N-1-35-V1	KBC-062-1A	CBR-6-2-N-1-.****
6-3-N	CBS-6-3-N-24S	KBM-6-3-N-1-35-V1	KBC-063-1A	CBR-6-3-N-1-.****
8-0-N	CBS-8-0-N-24S	KBM-8-0-N-1-35-V1	KBC-080-1A	CBR-8-0-N-1-.****
8-1-N	CBS-8-1-N-24S	KBM-8-1-N-1-35-V1	KBC-081-1A	CBR-8-1-N-1-.****
8-2-N	CBS-8-2-N-24S	KBM-8-2-N-1-35-V1	KBC-082-1A	CBR-8-2-N-1-.****
8-3-N	CBS-8-3-N-24S	KBM-8-3-N-1-35-V1	KBC-083-1A	CBR-8-3-N-1-.****
10-0-N	CBS-10-0-N-24S	KBM-10-0-N-1-35-V1	KBC-100-1A	CBR-10-0-N-1-.****
10-1-N	CBS-10-1-N-24S	KBM-10-1-N-1-35-V1	KBC-101-1A	CBR-10-1-N-1-.****
10-2-N	CBS-10-2-N-24S	KBM-10-2-N-1-35-V1	KBC-102-1A	CBR-10-2-N-1-.****
10-3-N	CBS-10-3-N-24S	KBM-10-3-N-1-35-V1	KBC-103-1A	CBR-10-3-N-1-.****
12-0-N	CBS-12-0-N-24S	KBM-12-0-N-1-35-V1	KBC-120-1A	CBR-12-0-N-1-.****
12-1-N	CBS-12-1-N-24S	KBM-12-1-N-1-35-V1	KBC-121-1A	CBR-12-1-N-1-.****
12-2-N	CBS-12-2-N-24S	KBM-12-2-N-1-35-V1	KBC-122-1A	CBR-12-2-N-1-.****
12-3-N	CBS-12-3-N-24S	KBM-12-3-N-1-35-V1	KBC-123-1A	CBR-12-3-N-1-.****

\*\*\*\* Denotes final hole diameter to be determined by customer.

# 8.4 STANDARD TOOLING

1. To select a Standard Tool Diameter Number, refer to Table 8.3A.
2. With the STDN, select the system of Standard Tooling from the Table 8.4B.
3. Refer to Section 2.0 Detailed Tooling for complete description of part.
4. To replace \*\*\*, refer to the subsection on Gage Finish Reamers in Section 2.0 Detailed Tooling.

**Table 8.4B  
Standard CsCx Tooling**

1	2	3	4	5
Standard Tool Diameter Number (STDN)	 Starting Drill	 Starting Reamer	 Combination Gage	 Mandrel Gage
14-0-N	CBSD-14-0-N-1	CBSR-14-0-N-1	CBG-14-0-N-1	CBMG-14-0-N
14-1-N	CBSD-14-1-N-1	CBSR-14-1-N-1	CBG-14-1-N-1	CBMG-14-1-N
14-2-N	CBSD-14-2-N-1	CBSR-14-2-N-1	CBG-14-2-N-1	CBMG-14-2-N
14-3-N	CBSD-14-3-N-1	CBSR-14-3-N-1	CBG-14-3-N-1	CBMG-14-3-N
16-0-N	CBSD-16-0-N-1	CBSR-16-0-N-1	CBG-16-0-N-1	CBMG-16-0-N
16-1-N	CBSD-16-1-N-1	CBSR-16-1-N-1	CBG-16-1-N-1	CBMG-16-1-N
16-2-N	CBSD-16-2-N-1	CBSR-16-2-N-1	CBG-16-2-N-1	CBMG-16-2-N
16-3-N	CBSD-16-3-N-1	CBSR-16-3-N-1	CBG-16-3-N-1	CBMG-16-3-N
18-0-N	CBSD-18-0-N-1	CBSR-18-0-N-1	CBG-18-0-N-1	CBMG-18-0-N
18-1-N	CBSD-18-1-N-1	CBSR-18-1-N-1	CBG-18-1-N-1	CBMG-18-1-N
18-2-N	CBSD-18-2-N-1	CBSR-18-2-N-1	CBG-18-2-N-1	CBMG-18-2-N
18-3-N	CBSD-18-3-N-1	CBSR-18-3-N-1	CBG-18-3-N-1	CBMG-18-3-N
20-0-N	CBSD-20-0-N-1	CBSR-20-0-N-1	CBG-20-0-N-1	CBMG-20-0-N
20-1-N	CBSD-20-1-N-1	CBSR-20-1-N-1	CBG-20-1-N-1	CBMG-20-1-N
20-2-N	CBSD-20-2-N-1	CBSR-20-2-N-1	CBG-20-2-N-1	CBMG-20-2-N
20-3-N	CBSD-20-3-N-1	CBSR-20-3-N-1	CBG-20-3-N-1	CBMG-20-3-N

Continued on next page...

# 8.4 STANDARD TOOLING

**Table 8.4B (Continued)  
Standard CsCx Tooling**

	6	7	8	9
Standard Tool Diameter Number (STDN)	 Straight Sleeve	 Countersink Mandrel	 Countersink Nosecap	 Gage Finish Reamer
14-0-N	CBS-14-0-N-24S	KBM-14-0-N-2-35-V1	KBC-140-2A	CBR-14-0-N-1-.****
14-1-N	CBS-14-1-N-24S	KBM-14-1-N-2-35-V1	KBC-141-2A	CBR-14-1-N-1-.****
14-2-N	CBS-14-2-N-24S	KBM-14-2-N-2-35-V1	KBC-142-2A	CBR-14-2-N-1-.****
14-3-N	CBS-14-3-N-24S	KBM-14-3-N-2-35-V1	KBC-143-2A	CBR-14-3-N-1-.****
16-0-N	CBS-16-0-N-24S	KBM-16-0-N-2-35-V1	KBC-160-2A	CBR-16-0-N-1-.****
16-1-N	CBS-16-1-N-24S	KBM-16-1-N-2-35-V1	KBC-161-2A	CBR-16-1-N-1-.****
16-2-N	CBS-16-2-N-24S	KBM-16-2-N-2-35-V1	KBC-162-2A	CBR-16-2-N-1-.****
16-3-N	CBS-16-3-N-24S	KBM-16-3-N-2-35-V1	KBC-163-2A	CBR-16-3-N-1-.****
18-0-N	CBS-18-0-N-24S	KBM-18-0-N-2-35-V1	KBC-180-2A	CBR-18-0-N-1-.****
18-1-N	CBS-18-1-N-24S	KBM-18-1-N-2-35-V1	KBC-181-2A	CBR-18-1-N-1-.****
18-2-N	CBS-18-2-N-24S	KBM-18-2-N-2-35-V1	KBC-182-2A	CBR-18-2-N-1-.****
18-3-N	CBS-18-3-N-24S	KBM-18-3-N-2-35-V1	KBC-183-2A	CBR-18-3-N-1-.****
20-0-N	CBS-20-0-N-24S	KBM-20-0-N-2-35-V1	KBC-200-2A	CBR-20-0-N-1-.****
20-1-N	CBS-20-1-N-24S	KBM-20-1-N-2-35-V1	KBC-201-2A	CBR-20-1-N-1-.****
20-2-N	CBS-20-2-N-24S	KBM-20-2-N-2-35-V1	KBC-202-2A	CBR-20-2-N-1-.****
20-3-N	CBS-20-3-N-24S	KBM-20-3-N-2-35-V1	KBC-203-2A	CBR-20-3-N-1-.****

\*\*\* Denotes final hole diameter to be determined by customer.

**FORCEMATE**

Section	Page
9.1 System Overview .....	175
9.2 Process Overview .....	177

For complete ForceMate engineering specifications please contact your nearest FTI Representative. Product specifications include a system overview, structure requirements, installation procedure, and a tooling selection guide.

# **ForceMate®**

## **Bushing Installation System**



*ForceMate Tooling*  
*Page 174*

- UNCONTROLLED IF PRINTED -

## 9.1 SYSTEM OVERVIEW

Fatigue Technology's patented ForceMate® system (FmCx™) provides an alternative to traditional interference fit bushing installation methods. The FmCx system consists of integrated technology and tooling, including FmCx bushings, mandrels, nosecaps, gages, support assemblies, cutting tools, puller units, special fixturing, as well as product training. Successful implementation and process effectiveness are ensured through use of the complete FTI FmCx system. Benefits include:

- **Reduced Installation Costs:**
  - Eliminates the need for cryogenic liquids
  - Significantly reduces installation labor.
- **Significant Fatigue Life Enhancement:**
  - Beneficial residual compressive stresses are created around the hole when the bushing is installed with high interference.
- **Increased Corrosion Resistance:**
  - High interference fit precludes the intrusion of corrosion materials between the bushing and the hole wall.
  - Initial clearance fit ensures that corrosion protection coatings (e.g., cadmium plating) remain intact.
- **High Resistance to Rotation and Pushout:**

High interference fit provides greater resistance to rotation or pushout than conventional bushing installation techniques.

The FmCx system can be used wherever interference fit bushing installation is required, regardless of fatigue enhancement requirements. Although the system has been primarily designed for use in metallic materials, FmCx has also demonstrated effectiveness in composite materials.

The FmCx system involves drawing an oversize mandrel through a pre-positioned clearance-fit bushing, internally pre-lubricated by an FTI proprietary process. The bushing is then reamed to the required hole diameter. The resulting interference fit of the bushing, coupled with simultaneous cold working of the metal surrounding the hole, produces a typical fatigue life improvement of 300 percent or better.

The FmCx system consists of two processes:

- The ForceMate Standard System
- The ForceMate Special System

The FmCx Standard System consists of technology that provides installations in aluminum structure that are equivalent in size to the National Aerospace Standards (NAS) for straight and flanged press-fit bushings in both standard and metric sizes.

The FmCx Special System consists of technology that allows implementation of the FmCx system for unique applications. Both of these systems are described completely in Fatigue Technology's ForceMate Specification FTI-9901.

## **9.1**

### **SYSTEM**

### **OVERVIEW**

Use of the FmCx system involves cold expanding an initially clearance fit bushing into a prepared starting hole. A specially sized bushing, with a proprietary lubricant on the inside surface, is placed over a tapered expansion mandrel. The attachment end of the mandrel is inserted into a puller unit. The mandrel/bushing assembly is then placed in the hole, and the puller unit is activated to pull the mandrel through the bushing. The expansion of the bushing by the mandrel cold works the base material while the bushing is simultaneously installed with high interference.

The inside surface of the bushing after FmCx processing has a slightly tapered profile. After the mandrel is pulled through the bushing, the bushing is reamed to the desired final inside diameter. The reaming operation also removes the lubricant residue from the bushing. If the condition of the final bushing inside diameter after FmCx processing is acceptable, the final sizing operation may be eliminated.

## 9.2 PROCESS OVERVIEW

1. Prepare starting hole.



2. Place bushing onto mandrel.



3. Insert mandrel into puller unit. Place mandrel and bushing into the workpiece.



4. Activate puller unit to install the bushing.



5. Machine bushing inside diameter to final size.





*This page intentionally left blank  
for two-sided printing*

Section	Page
10.1 System Overview .....	180
10.2 Process Overview .....	181


For complete ForceTec engineering specifications please visit our online technical library at [www.fatiguetechnology.com/technical-library.asp](http://www.fatiguetechnology.com/technical-library.asp) or contact your nearest FTI Representative. Product specifications include; a system overview, structure requirements, installation procedure, and a tooling selection guide.

# **ForceTec<sup>®</sup>**

## **Rivetless Nut Plates**



## 10.1 SYSTEM OVERVIEW

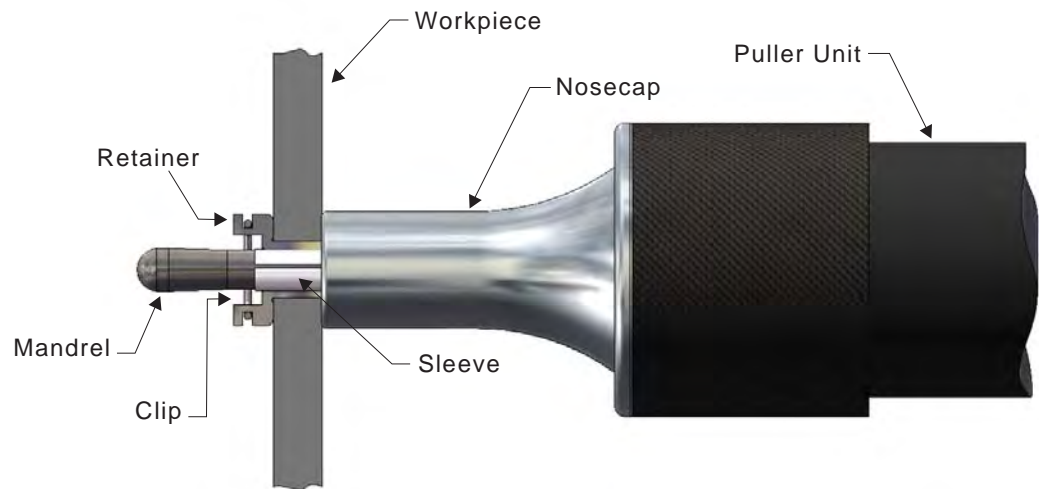

**Figure 12.1**  
**ForceTec System Components**

The Fatigue Technology patented ForceTec® System is designed to quickly and consistently install rivetless nut plates with high interference using Split Sleeve Cold Expansion Technology. The ForceTec System is designed to expand a retainer into a single starting hole, eliminating the need for satellite rivet holes, countersinking, or swaging. The retainer is capable of holding a range of common thread locking nuts. The fatigue life of the hole is enhanced due to the elimination of the satellite holes and the expansion of the retainer into the hole, imparting residual compressive stresses into the surrounding material. The ForceTec Standard System can accommodate 3/16, 1/4, 5/16, 3/8, 7/16, and 1/2-inch fastener diameters in material as thin as 0.060 inch for the 3/16 inch size retainer, and thickness up to 1.5 inch for open configuration and 1.49 inch for sealed configuration. If you have any questions regarding ForceTec or size requirements outside these parameters, please contact our Customer Service Department.

## 10.2 PROCESS OVERVIEW



1. Check the starting hole using blade end of the combination gage.




2. Slide the split sleeve over the tapered mandrel.




3. Insert the retainer into the starting hole from the back and insert the mandrel/sleeve assembly through the retainer from the front.



4. Seat the nose cap firmly against the workpiece and activate the puller unit to pull the mandrel through the sleeve/retainer assembly.




5. Remove and discard the used split sleeve.



6. Check the final hole diameter using the round end of the combination gage.



7. If required, trim the protruding portion of the retainer to length using the trimming tool.

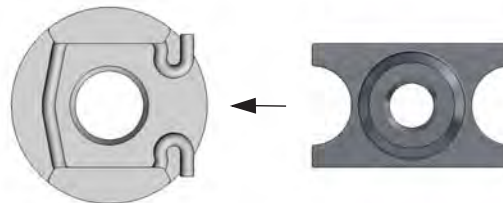

8. Install the nut into the retainer without removing the clip.

- UNCONTROLLED IF PRINTED -

*ForceTec*  
*Page 181*

For GromEx overview, process, and engineering specifications please contact your nearest FTI Representative. Product specifications include a system overview, structure requirements, installation procedure, and a tooling selection guide.

# **GromEx<sup>®</sup>**

## **Hole Reinforcement for Composites**





*This page intentionally left blank  
for two-sided printing*

# 12.0 TOOLING KITS

## TOOLING KITS

Section	Page
12.1 StopCrack Kit .....	185
12.2 Service Bulletins.....	186
12.3 Custom Tooling Kits.....	187
12.4 Cx Overhaul and Repair Kits.....	188
12.5 Tooling Cases .....	191
12.6 Mobile Tooling Cabinets.....	192

---

## **Enhanced Stop Drill Repair**

Stop drilling of a hole at the tip of a fatigue crack is frequently used to temporarily retard the propagation of the crack until a permanent repair is made. As a result of extensive research and development using Split Sleeve Cold Expansion technology, the StopCrack Enhanced Stop Drill Repair (ESDR) System offers an improvement over traditional stop drilling techniques, substantially reducing the likelihood that a stop drilled crack will reinitiate at the hole.

StopCrack does not replace stop drilling. Designed as a complete kit for efficient use by mechanics and maintenance personnel, StopCrack uses a unique system to cold expand a stop drilled hole. This process shields the hole from the effects of cyclic tensile loads by imparting residual compressive stresses around the circumference of the hole. This is accomplished without adding weight to or changing the metallic characteristics of the structure.

### **StopCrack Kit FTI Part Number: FTI-SCK-A1**

Included in each StopCrack kit is everything required to stop drill and cold expand 3/16 inch, 1/4 inch, and 17/64 inch holes. For a complete list of kit contents and specifications please contact our Customer Service Department and request FTI Spec 2009-02, StopCrack Enhanced Stop Drill Repair of Cracks in Aluminum.

## **12.2**

### **SERVICE BULLETINS**

## **Service Bullet Kits and Support**

Fatigue Technology provides custom Service Bulletin Kits designed for specific aircraft rework applications. Fatigue Technology is the endorsed and approved supplier of Service Bulletin Cold Working Kits for the following aircraft manufacturers:

- \* Boeing
- \* Airbus
- \* Aerospatiale
- \* Fokker
- \* Lockheed Martin
- \* British Aerospace Airbus
- \* Airbus Industries
- \* ATR

Kits are sold complete with all necessary capital and expendable tooling. Capital tooling may also be rented and is subject to availability. FTI maintains a complete inventory of cold expansion tooling, and can custom design specialized tooling to accommodate any aircraft configuration. All kits are packaged in durable storage containers and are marked for identification in accordance with your requirements. Complete instructions for each Service Bulletin Rework Procedure are included in all kits and training can be provided on-site or at our facility in Seattle (if needed).

For details of all custom tooling kits available or assistance in preparing kits for specific applications, please contact our Customer Service Department at 206-246-2010.

\* NOTE: FTI is the only approved source for service bulletin tooling and support for these commercial aircraft manufacturers.

---

## Custom Tooling Kits

Fatigue Technology has in-house tool design and fabrication capabilities that enable us to offer Custom Tooling Kits for easy implementation of the Split Sleeve Cold Expansion System. These kits can be designed for specific applications based on customer-supplied documents, Commercial Service Bulletins, Military Air Frame Changes or Tech Orders, or Engineering Change Proposals. All kits are packaged in durable storage containers and are marked for identification in accordance with your requirements

- Custom Tooling Kits can be ordered to include any of the following:
- Capital Tooling
- Expendable Tooling
- Instructions for installation or rework procedures
- Training on-site or at our facility in Seattle, Washington
- Kit Proof Engineering Support

For details of all custom tooling kits available or assistance in preparing kits for specific applications, please contact our Customer Service Department at 206-246-2010.

## 12.3 CUSTOM TOOLING KITS

## 12.4 CX OVERHAUL AND REPAIR KITS

### Cold Expansion (Cx) Overhaul and Repair Kits

Most repair and overhaul facilities are now using FTI's Split Sleeve Cold Expansion (SsCx) System for fatigue life enhancement of fastener holes. The FTI Cx Overhaul and Repair Kits are specifically designed to meet the special requirements of these customers. These kits contain all of the tooling required to cold expand existing hole diameters and allow repair of up to 100 holes of any one diameter (kits are configured to accommodate a specific hole size or sizes).

Additionally, each kit contains our enhanced stop drill repair kit, StopCrack (except CxORK-3 and CxORK-4). This process improves the fatigue life of stop-drilled holes by at least 20:1.

#### Features

- All tooling is based upon the Rework SsCx System - allowing optimal airframe rework parameters.
- Tooling comes packaged in a sturdy, mobile cabinet with locking wheels.
- Kits contain additional space for special tooling sets (service bulletin or other modification kits).
- Instructions and specifications are included.
- One day of training is included in the price of the kit (not including airfare).
- Includes tooling for nominal hole sizes as well as corresponding oversizes.
- Tooling may also be used for cold expanding reduced edge margin holes, stop drilled holes, countersunk holes, attachment holes in repair doublers, etc.
- Cutting tools, gages, mandrels, nosecaps, and sleeves to treat holes of each size are included.
- Most restricted access holes can be treated using the LBOA offset adapter and extension nosecaps.
- Includes Little Brute Puller Unit and lightweight FT-20 PowerPak.
- Overall dimensions are 42"H X 28"W X 28"L.

See page 190, this section for an example of a typical CXORK Kit (contents list).

## 12.4 CX OVERHAUL AND REPAIR KITS

Table 12.4A lists all Overhaul and Repair Kits currently available from FTI. The kits are broken down into three categories:

1. CB Tooling Series (Aluminum or Mild Steel)
2. CR Tooling Series (Aluminum Rework)
3. CA Tooling Series (Titanium and High Strength Steel)

The CXORK-1A and 2A kits are complete kits, including countersink tooling. The CXORK-1B and 2B kits do not contain countersink tooling, but can be upgraded to a CXORK-1A or 2A by purchasing the supplemental countersink tooling kits, CXORK-1C or 2C.

**Table 12.4A  
Overhaul and Repair Kits**

Tooling Series	Kit Number	Existing Hole Diameter Range	Countersink Tooling Included	Applicable Material
CB	FTI-CXORK-1A	5/32 to 3/8"	Yes	Aluminium
	FTI-CXORK-1B	5/32 to 3/8"	No	Aluminium
	*CXORK-1C	5/32 to 3/8"	Yes	Aluminium
	CXORK-3	7/16 to 1"	No	Aluminium
	**CXORK-3A	7/16 to 1"	No	Aluminium
CR	CXORK-2A	5/32 to 3/8"	Yes	Aluminium
	CXORK-2B	5/32 to 3/8"	No	Aluminium
	*CXORK-2C	5/32 to 3/8"	Yes	Aluminium
CA	CXORK-4	3/16 to 1/2"	No	Steel/Titanium

\*CXORK-1C and 2C contain only supplemental countersink tooling sets.

\*\*CXORK-3A includes second oversize tooling.

For additional information on standard tooling kits, please contact our Customer Service Department.

Fatigue Technology reserves the right to change the configuration of standard kits at any time as part of our product improvement policy. Please contact FTI for the latest kit configurations.

## 12.4 CX OVERHAUL AND REPAIR KITS

The contents of CXORK - 1A/2A are listed below as an example of a typical CXORK Kit. Additional kits are available for specific applications.

### CXORK - 1A/2A

- 1 Four drawer mobile cabinet
- 1 LB-20 Little Brute hydraulic puller unit
- 1 FT-20 lightweight hydraulic PowerPak
- 1 LBOA-20 offset puller adapter
- 1 Enhanced Stop Drill Repair Kit (StopCrack) for 3/16, 1/4, and 17/64 inch hole diameters

Each StopCrack kit contains:

- 1 HP-20 mechanical puller
- 2 Extension nosecaps
- 8 Starting drills
- 6 Starting reamers
- 3 Combination gages
- 3 Mandrels
- 3 Mandrel gages
- 110 Split sleeves
- 6 Gage finish reamers (rivet holes)
- 6 Gage finish reamers (lockbolt holes)
- 8 Tooling Sets  
(5/32 inch - 3/8 inch, existing holes diameter range)

Each tooling set contains:

- 1 Tooling set container
- 2 Starting drills (twist)
- 2 Starting reamers
- 1 Combination gage
- 1 Mandrel gage
- 3 Mandrels
- 1 Standard nosecap assembly
- 100 Split sleeves (flared)
- 2 Gage finish reamers
- 1 Final hole gage
- 1 Offset adapter jaw
- 1 \*Countersink nosecap
- 100 \*Split sleeves (straight)
- 20 \*Backup Blocks

**\*Note:** These items make up the supplementary countersink tooling sets for CXORK-1C/2C.

## 12.5 TOOLING CASES

### **Figure 12.5A** **Tooling Case - FT-BX-C1**

Keep individual tooling sizes separate and organized  
Holds a complete tooling set up to 14-3-N tooling size:

- 1 Starting Drill
- 1 Starting Reamer
- 1 Combination Gage
- 1 Mandrel Gage
- 1 Mandrel
- 1 Nosecap Assembly
- 1 Finish Reamer

Sleeves:

- 100 Sleeves up to 12-3-N or
- 50 Sleeves 14-x-N

Convenient carry handle for ease of bringing to shop floor

15w" x 11d" x 2.25h" (381mm x 279.4mm x 57.15mm)

Plastic, lightweight and portable



### **Figure 12.5B** **Tooling Case - FT-BX-C2**

Keep individual tooling sizes separate and organized  
Holds a complete tooling set up to 30-3-N tooling size:

- 1 Starting Drill
- 1 Starting Reamer
- 1 Combination Gage
- 1 Mandrel Gage
- 1 Mandrel
- 1 Nosecap Assembly
- 1 Finish Reamer

Sleeves:

- 200 Sleeves up to 22-3-N or
- 100 Sleeves of larger sizes

Convenient carry handle for ease of bringing to shop floor

15w" x 11d" x 5h" (381mm x 279.4mm x 127mm)

Plastic, lightweight and portable

*Double-sided. 1 side open compartment and 1 side comes with dividers identical to FT-BX-C1*



*Tooling Kits*  
*Page 191*

- UNCONTROLLED IF PRINTED -

## 12.6 MOBILE TOOLING CABINETS

### **Figure 12.6A** **Mobile Tooling Cabinet - FT-BX-A8**

Holds individual FT-BX-C1 and FT-BX-C2 kit boxes

Holds Capital Tooling equipment

Capacity with Capital Tooling:

8 FT-BX-C1 or

4 FT-BX-C2

Capacity without Capital Tooling:

11 FT-BX-C1 or

5 FT-BX-C2

Wheels are included for portability

35h" x 28w" x 16d" (889mm x 711.2mm x 406.4mm)

53 lbs stand alone (24.04kg)

Wood construction, plastic coating



### **Figure 12.6B** **Mobile Tooling Cabinet - FT-BX-A9**

Holds individual FT-BX-C1 and FT-BX-C2 kit boxes

Holds Capital Tooling equipment

Capacity with Capital Tooling:

3 FT-BX-C1 or

1 FT-BX-C2

Capacity without Capital Tooling:

6 FT-BX-C1 or

3 FT-BX-C2

Wheels are included for portability

34h" x 17w" x 16d" (863.6mm x 431.8mm x 406.4mm)

41 lbs stand alone (18.6kg)

Wood construction, plastic coating



## 12.6 MOBILE TOOLING CABINETS

### **\*Figure 12.6C** **Mobile Tooling Cabinet - 1010-002**

2 fixed and 2 swivel 6" x 2" casters with wheel locks

Tubular steel handles for easy mobility

Individual drawer latches

100% extension drawers

4 drawers

13", 6", 4", and 3" depth (330.2mm, 152.4mm,  
101.6mm, and 76.2mm)

29w" x 29d" x 42h" (736.6 x 736.6 x 1066.8mm)

332 lbs stand alone (150.6kg)

Metal construction




\*Figure 12.6C is of a CXORK-2A tooling kit (see section 12.4)

# 13.0 ACCESSORIES

## ACCESSORIES

Section	Page
13.1 Adapter Kits .....	195
13.2 Support Fixtures .....	197
13.3 Stroke Limiter.....	197
13.4 Seal Kits and Rework Kits .....	198
13.5 Replacement Hoses and Extension Hoses .....	198
13.6 HOA Hose Reversal Kit .....	199
13.7 Remote Trigger.....	199
13.8 Bushing Removal Tool .....	200

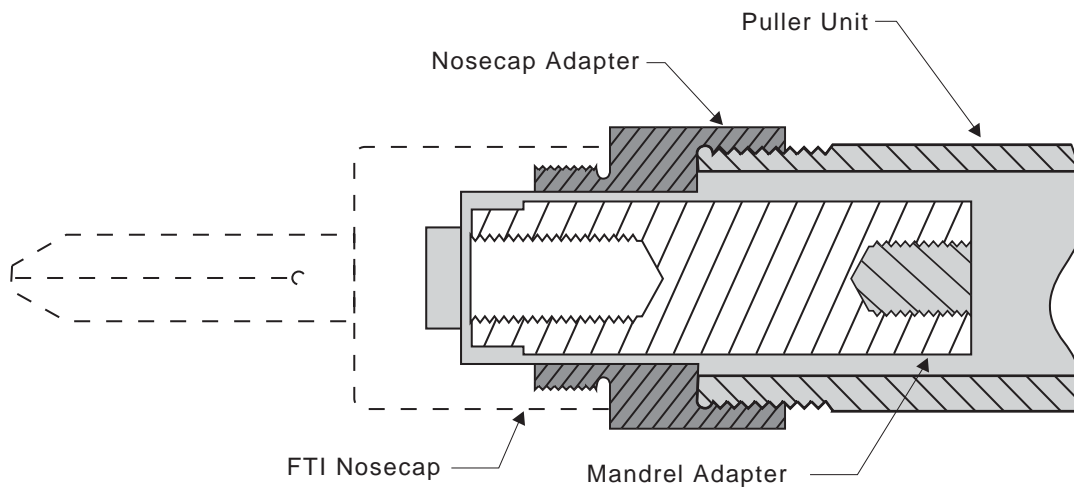

**Figure 13.1A**  
**Assembled Nosecap Adapter and Mandrel Adapter**

- Tables 13.1A, 13.1B, 13.1C, and 13.1D list puller unit adapters for converting various pullers to FTI associated nosecaps and mandrels.
- Each puller unit adapter assembly includes a nosecap adapter and/or mandrel adapter.

**Table 13.1A**  
**Nosecap Adapters**

Puller Unit	Model Number	Function
LB-XX	LB/MB-CBC-A2	Allows MB Nosecap to fit LB Pullers
ST1350A-0XX	ST1350A/CBC-1	Allows FTI LB Nosecap to fit Boeing ST1350A Puller
MB-XX	MB/BB-CBC-1	Allows BB Nosecap to fit MB Pullers

**Table 13.1B**  
**Mandrel Adapters**

Puller Unit	Model Number	Function
MB-XX	FTI-MB/LB-A1	Allows Little Brute Mandrel and Nosecap to attach to Medium Brute Puller Unit

**Table 13.1C**  
**Nosecap/Mandrel Adapter Sets**

Puller Unit	Model Number	Function
ST1350A-XX	ST1350A/LB-1	Adapts FTI Mandrels (-1) and LB Nosecaps to ST1350A-XX Puller
MB-XX	ST1350C/LB-2	Adapts FTI Mandrels (-1) and LB Nosecaps to -5 MB mandrel adapter/LB nosecap to MB-Z/XX puller

# 13.1 ADAPTER KITS


**Table 13.1D**  
**Adapters for Little Brute, Little Brute Offset, Medium Brute,**  
**Medium Brute Offset, and Big Brute**

	Puller Unit	Model Number	Description	Mandrel Thread	Mandrel/Chuck Assembly
Little Brute	LB-XX	LB-D10	Threaded Adapter	7/16" x 20 UNF	-1--10A-HOA
	LB-XX	LB-D10A	Threaded Adapter	1/2" x 20 UNF	-1A-
	LB-XX	LB-PC-1	Pintail Chuck assy	Mandrel "B", .0730-.0859	----
	LB-XX	LB-PC-2	Pintail Chuck assy	Mandrel "B", .0860-.0989	----
	LB-XX	LB-PC-3	Pintail Chuck assy	Mandrel "B", .0990-.1119	----
	LB-XX	LB-PC-4	Pintail Chuck assy	Mandrel "B", .1120-.1249	----
	LB-XX	LB-PC-5	Pintail Chuck assy	Mandrel "B", .1250-.1379	----
	LB-XX	LB-PC-6	Pintail Chuck assy	Mandrel "B", .1380-.1639	----
	LB-XX	LB-PC-8	Pintail Chuck assy	Mandrel "B", .1640-.1899	----
	LB-XX	LB-PC-10	Pintail Chuck assy	Mandrel "B", .1900-.2159	----
	LB-XX	LB-PC-12	Pintail Chuck assy	Mandrel "B", .2160-.2499	----
	LB-XX	LB-PC-14	Pintail Chuck assy	Mandrel "B", .2500-.3124	----
	LB-XX	LB-PC-16	Pintail Chuck assy	Mandrel "B", .3125-.3250	----
	LB-XX	LB-CA-4	Tang Chuck assy	Mandrel "B", .2000-.2999	----
	LB-XX	LB-CA-6	Tang Chuck assy	Mandrel "B", .3000-.3999	----
	ST1350A-03	ST1350A/CBM1	Threaded Adapter	7/16" x 20 UNF	-1--10A-HOA
	ST1350A-05	ST1350A/CBM1	Threaded Adapter	7/16" x 20 UNF	-1
ST1350A0X	ST5300P-A-1	Threaded Adapter	7/16" x 20 UNF	-1	
Little Brute Offset	LBOA-XX	5130-001	Pintail Adapter	12-28 UNF	Pintail
	LBOA-XX	LBOA-SA-NUT	Self Alignment Nut	7/16" x 20 UNF	-10A
Medium Brute	MB-XX	MB-D17	Threaded Adapter	5/8" x 18 UNF	-2-, -20A
	MB-XX	MB-D18	Threaded Adapter	7/8" x 18 UNF	-54
	MB-XX	MB-CA-8	Chuck Assembly	Mandrel "B", .4000-.5999	----
	MB-XX	MC-CA-11	Chuck Assembly	Mandrel "B", .6000-.7999	----
	MB-XX	MB/LB-CBM-A2	Threaded Adapter	7/16" x 20 UNF	-1 to -2
	MB-XX	ST1350AC/LB-A	Threaded Adapter	7/16" x 20 UNF	-1 to -5
	MB-XX	-2579001	Threaded Adapter	1/2" x 20 UNF	ST1350 to -2
Medium Brute Offset	MBOA-XX	2519-001	Threaded Adapter	7/16" x 18 UNF	-5-, -4-
	MBOA-XX	2519-002	Threaded Adapter	5/8" x 18 UNF	-2-, -20A
	MBOA-XX	2519-003	Threaded Adapter	7/16" x 20 UNF	-1-, -10A, -HOA
Big Brute	BB-XX	BB-A-D35	Threaded Adapter	7/8" x 14 UNF	-5-, -4-
	BB-XX	BB-C-D35	Threaded Adapter	1" x14 UNS	-9-
	BB-XX	BB-E-D35	Threaded Adapter	5/8" x18 UNF	-2-, -20A-
	BB-XX	BB-CA-11	Chuck Assembly	----	----
	BB-XX	BB-CA-16	Chuck Assembly	----	-3-
	BB-XX	BB-CA-20	Chuck Assembly	----	----

## 13.2 SUPPORT FIXTURES



**Figure 13.2A**  
**Expandable Screw Type**  
**Support Assembly**

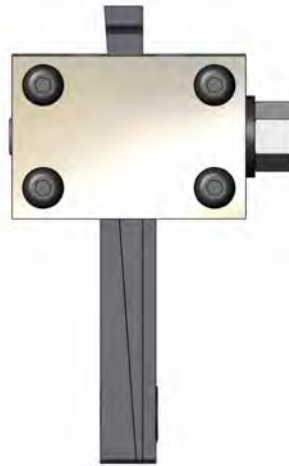

**Figure 13.2B**  
**Wedge Type Support**  
**Assembly**  
**(For multiple lugs)**

- Contact FTI Customer Service for assistance in selecting Support Assemblies.



**Figure 13.3A**  
**Stroke Limiter**



**Figure 13.3B**  
**Adjustable Stroke Limiter**

- Artificially reduces stroke of puller unit in restricted access areas.
- Contact FTI Customer Service for assistance in selecting Support Assemblies.

## 13.3 STROKE LIMITER

*Accessories*  
*Page 197*

- UNCONTROLLED IF PRINTED -

# 13.4 SEAL KITS AND REWORK KITS

**Table 13.4A  
Seal Kits**

Model Number	Description
LB-SK	Little Brute Seal kit
MB-SK	Medium Brute Seal Kit
BB-SK	Big Brute Seal Kit

- Contains all wear seals and o-rings for specified puller units.

**Table 13.4B  
Rework Kits**

Model Number	Description
LB-RK	Little Brute Rework kit
MB-RK	Medium Brute Rework Kit
BB-RK	Big Brute Rework Kit

- Contains seal kit (wear seals and o-rings for specified puller units), plus wear parts for trigger, new hydraulic adapter, and air seal adapter.

# 13.5 REPLACEMENT HOSES AND EXTENSION HOSES

**Table 13.5A  
Replacement Hose Assemblies**

Model Number	Description
IWZY-10	10' Replacement Hose
IWZY-20	20' Replacement Hose
IWZY-25	25' Replacement Hose
IWZY-30	30' Replacement Hose


**Table 13.5B  
Extension Hose Assemblies**

Model Number	Description
5005-001	10' Extension Hose
5005-002	30' Extension Hose

- Used to extend existing hose.
- Features two air lines and one hydraulic line.
- Not recommended for use with FT-20 PowerPak due to increased amount of hydraulic fluid required with additional hose length.

**Table 13.6A**  
**HOA Hose Reversal Kit**

Part Number	Description
2816-001	HOA-6 Reversal Kit
2816-002	HOA-7 Reversal Kit
2816-003	HOA-8 Reversal Kit

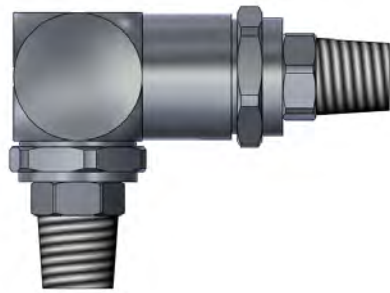

**Figure 13.6A**  
**HOA Reversal Assembly**

- For use with HOA series of adapters.
- Allows hydraulic hose to be connected at top of adapter in restricted access situations.
- Kit also includes plugs to seal holes on bottom of adapter where hose usually connects.



**Figure 13.7A**  
**Remote Trigger**

- Part number 2049-007
- For use with FTMP-XX, SB-2A, JB-XX, SB-300X


## **13.6** **HOA HOSE** **REVERSAL KIT**

## **13.7** **REMOTE** **TRIGGER**

*Accessories*  
*Page 199*

- UNCONTROLLED IF PRINTED -

## 13.8 BUSHING REMOVAL TOOL

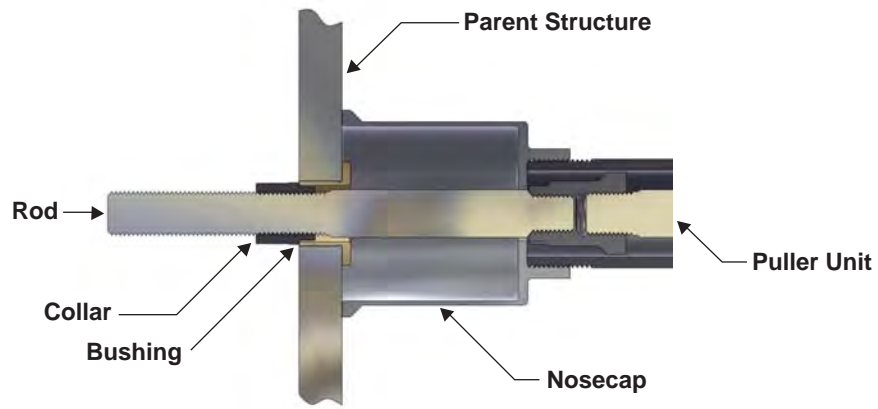

**Figure 13.8A**  
**Bushing Removal Tooling**

- Conveniently removes interference fit installed bushing/insert.
- Removes bushings up to 2 inches in diameter.
- Does not damage surrounding structure.
- Compatible with FTI hydraulic puller units.
- Captures the bushing once removed to prevent bushing from being lost inside structure.
- Manufactured from high-strength steel alloy for function and durability.

For additional information on bushing removal tooling please reference your tip sheet or contact FTI's Customer Service Department.

**Table 13.8A**  
**Bushing Removal Tooling**

**13.8**  
**BUSHING**  
**REMOVAL**  
**TOOL**

Bushing Inside Diameter (inches)	Puller Unit Options	Rod Model Number	Collar Model Number	Nosecap Model Number
3/16 (.188)	Little Brute	BRR-3-4-1	BRC-3-50	BRN-L-*
7/32 (.219)	Little Brute	BRR-3OS-4-1	BRC-3OS-50	BRN-L-*
1/4 (.250)	Little Brute	BRR-44OS-4-1	BRC-4-50	BRN-L-*
9/32 (.281)	Little Brute	BRR-44OS-4-1	BRC-4OS-50	BRN-L-*
5/16 (.313)	Little Brute	BRR-55OS-4-1	BRC-5-50	BRN-L-*
11/32 (.344)	Little Brute	BRR-55OS-4-1	BRC-50OS-50	BRN-L-*
3/8 (.375)	Little Brute	BRR-66OS-4-1	BRC-6-50	BRN-L-*
13/32 (.406)	Little Brute	BRR-66OS-4-1	BRC-6OS-50	BRN-L-*
7/16 (.438)	Little Brute	BRR-78OS-4-1	BRC-7-50	BRN-L-*
15/32 (.496)	Little Brute	BRR-78OS-4-1	BRC-7OS-50	BRN-L-*
1/2 (.500)	Little Brute	BRR-78OS-4-1	BRC-8-50	BRN-L-*
17/32 (.531)	Little Brute	BRR-78OS-4-1	BRC-80OS-50	BRN-L-*
9/16 (.563)	Little Brute	BRR-911OS-4-1	BRC-9-50	BRN-L-*
	Medium Brute	BRR-911OS-4-2	BRC-9-50	BRN-M-*
19/32 (.594)	Little Brute	BRR-911OS-4-1	BRC-9OS-50	BRN-L-*
	Medium Brute	BRR-911OS-4-2	BRC-9OS-50	BRN-M-*
5/8 (.625)	Little Brute	BRR-911OS-4-1	BRC-10-50	BRN-L-*
	Medium Brute	BRR-911OS-4-2	BRC-10-50	BRN-M-*
21/32 (.656)	Little Brute	BRR-911OS-4-1	BRC-10OS-50	BRN-L-*
	Medium Brute	BRR-911OS-4-2	BRC-10OS-50	BRN-M-*
11/16 (.688)	Little Brute	BRR-911OS-4-1	BRC-11-50	BRN-L-*
	Medium Brute	BRR-911OS-4-2	BRC-11-50	BRN-M-*
23/32 (.719)	Little Brute	BRR-911OS-4-1	BRC-11OS-50	BRN-L-*
	Medium Brute	BRR-911OS-4-2	BRC-11OS-50	BRN-M-*
3/4 (.750)	Medium Brute	BRR-1214OS-4-2	BRC-12-50	BRN-M-*
25/32 (.781)	Medium Brute	BRR-1214OS-4-2	BRC-12OS-50	BRN-M-*
13/16 (.813)	Medium Brute	BRR-1214OS-4-2	BRC-13-50	BRN-M-*
27/32 (.844)	Medium Brute	BRR-1214OS-4-2	BRC-13OS-50	BRN-M-*
7/8 (.875)	Medium Brute	BRR-1214OS-4-2	BRC-14-50	BRN-M-*
29/32 (.906)	Medium Brute	BRR-1214OS-4-2	BRC-14OS-50	BRN-M-*
15/16 (.938)	Medium Brute	BRR-1523OS-4-5	BRC-15-50	BRN-M-*
	Big Brute	BRR-1523OS-4-5	BRC-15-50	BRN-B-*
31/32 (.969)	Medium Brute	BRR-1523OS-4-2	BRC-15OS-50	BRN-M-*
	Big Brute	BRR-1523OS-4-5	BRC-15OS-50	BRN-B-*

\* There must be at least .030 inch of clearance between the bushing outside diameter (flange if applicable) and nose cap inside diameter. Refer to Table 13.8E for nose cap inside diameter.

*Accessories*  
*Page 201*

- UNCONTROLLED IF PRINTED -

# 13.8 BUSHING REMOVAL TOOL

**Table 13.8A (Continued)  
Bushing Removal Tooling**

Bushing Inside Diameter (inches)	Puller Unit Options	Rod Model Number	Collar Model Number	Nosecap Model Number
1 (1.000)	Medium Brute	BRR-1523OS-4-2	BRC-16-50	BRN-M-*
	Big Brute	BRR-1532OS-4-5	BRC-16-50	BRN-B-*
33/32 (1.031)	Medium Brute	BRR-1523OS-4-2	BRC-16OS-50	BRN-M-*
	Big Brute	BRR-1532OS-4-5	BRC-16OS-50	BRN-B-*
17/16 (1.063)	Medium Brute	BRR-1523OS-4-2	BRC-17-50	BRN-M-*
	Big Brute	BRR-1532OS-4-5	BRC-17-50	BRN-B-*
35/32 (1.094)	Medium Brute	BRR-1523OS-4-2	BRC-17OS-50	BRN-M-*
	Big Brute	BRR-1532OS-4-5	BRC-17OS-50	BRN-B-*
9/8 (1.125)	Medium Brute	BRR-1523OS-4-2	BRC-18-50	BRN-M-*
	Big Brute	BRR-1532OS-4-5	BRC-18-50	BRN-B-*
37/32 (1.156)	Medium Brute	BRR-1523OS-4-2	BRC-18OS-50	BRN-M-*
	Big Brute	BRR-1532OS-4-5	BRC-18OS-50	BRN-B-*
19/16 (1.188)	Medium Brute	BRR-1523OS-4-2	BRC-19-50	BRN-M-*
	Big Brute	BRR-1532OS-4-5	BRC-19-50	BRN-B-*
39/32 (1.219)	Medium Brute	BRR-1523OS-4-2	BRC-19OS-50	BRN-M-*
	Big Brute	BRR-1532OS-4-5	BRC-19OS-50	BRN-B-*
5/4 (1.250)	Medium Brute	BRR-1523OS-4-2	BRC-20-50	BRN-M-*
	Big Brute	BRR-1532OS-4-5	BRC-20-50	BRN-B-*
41/32 (1.281)	Medium Brute	BRR-1523OS-4-2	BRC-20OS-50	BRN-M-*
	Big Brute	BRR-1532OS-4-5	BRC-20OS-50	BRN-B-*
21/16 (1.313)	Medium Brute	BRR-1523OS-4-2	BRC-21-50	BRN-M-*
	Big Brute	BRR-1532OS-4-5	BRC-21-50	BRN-B-*
43/32 (1.344)	Medium Brute	BRR-1523OS-4-2	BRC-21OS-50	BRN-M-*
	Big Brute	BRR-1532OS-4-5	BRC-21OS-50	BRN-B-*
11/8 (1.375)	Medium Brute	BRR-1523OS-4-2	BRC-22-50	BRN-M-*
	Big Brute	BRR-1532OS-4-5	BRC-22-50	BRN-B-*
45/32 (1.406)	Medium Brute	BRR-1523OS-4-2	BRC-22OS-50	BRN-M-*
	Big Brute	BRR-1532OS-4-5	BRC-22OS-50	BRN-B-*
23/16 (1.438)	Medium Brute	BRR-1523OS-4-2	BRC-23-50	BRN-M-*
	Big Brute	BRR-1532OS-4-5	BRC-23-50	BRN-B-*
47/32 (1.469)	Medium Brute	BRR-1523OS-4-2	BRC-23OS-50	BRN-M-*
	Big Brute	BRR-1532OS-4-5	BRC-23OS-50	BRN-B-*
3/2 (1.500)	Big Brute	BRR-1532OS-4-2	BRC-24-50	BRN-B-*
49/32 (1.531)	Big Brute	BRR-1532OS-4-5	BRC-24OS-50	BRN-B-*

Accessories  
Page 202

\* There must be at least .030 inch of clearance between the bushing outside diameter (flange if applicable) and nose cap inside diameter. Refer to Table 13.8E for nose cap inside diameter.


- UNCONTROLLED IF PRINTED -

**Table 13.8A (Continued)  
Bushing Removal Tooling**


**13.8  
BUSHING  
REMOVAL  
TOOL**

Bushing Inside Diameter (inches)	Puller Unit Options	Rod Model Number	Collar Model Number	Nosecap Model Number
25/16 (1.563)	Big Brute	BRR-1532OS-4-5	BRC-25-50	BRN-B-*
51/32 (1.593)	Big Brute	BRR-1532OS-4-5	BRC-25OS-50	BRN-B-*
13/8 (1.625)	Big Brute	BRR-1532OS-4-5	BRC-26-50	BRN-B-*
53/32 (.1.656)	Big Brute	BRR-1532OS-4-5	BRC-26OS-50	BRN-B-*
27/16 (1.688)	Big Brute	BRR-1532OS-4-5	BRC-27-50	BRN-B-*
55/32 (1.719)	Big Brute	BRR-1532OS-4-5	BRC-27OS-50	BRN-B-*
7/4 (1.750)	Big Brute	BRR-1532OS-4-5	BRC-28-50	BRN-B-*
57/32 (1.781)	Big Brute	BRR-1532OS-4-5	BRC-28OS-50	BRN-B-*
29/16 (1.813)	Big Brute	BRR-1532OS-4-5	BRC-29-50	BRN-B-*
59/32 (1.844)	Big Brute	BRR-1532OS-4-5	BRC-29OS-50	BRN-B-*
15/8 (1.875)	Big Brute	BRR-1532OS-4-5	BRC-30-50	BRN-B-*
61/32 (1.906)	Big Brute	BRR-1532OS-4-5	BRC-30OS-50	BRN-B-*
31/16 (1.938)	Big Brute	BRR-1532OS-4-5	BRC-31-50	BRN-B-*
63/32 (1.969)	Big Brute	BRR-1532OS-4-5	BRC-31OS-50	BRN-B-*
2 (2.000)	Big Brute	BRR-1532OS-4-5	BRC-32-50	BRN-B-*
65/32 (2.031)	Big Brute	BRR-1532OS-4-5	BRC-32OS-50	BRN-B-*

\* There must be at least .030 inch of clearance between the bushing outside diameter (flange if applicable) and nose cap inside diameter. Refer to Table 13.8E for nose cap inside diameter.

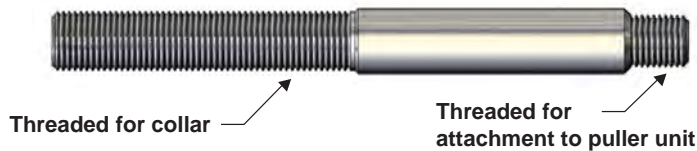


**Figure 13.8B  
Bushing Removal Rod**

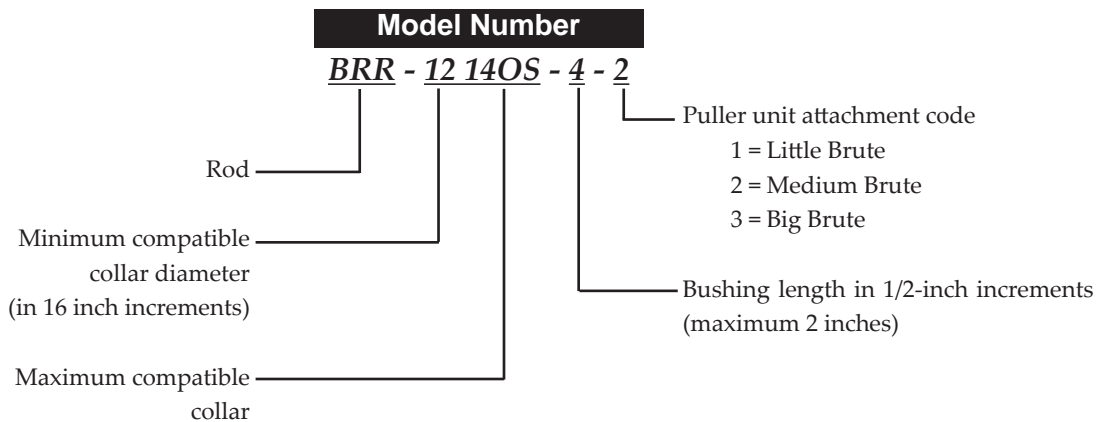


Note: Separate Bushing Removal Rods are required for 3/16 and 7/32 inside diameter bushings. For other sizes, the rods are common to more than one size.


# 13.8 BUSHING REMOVAL TOOL

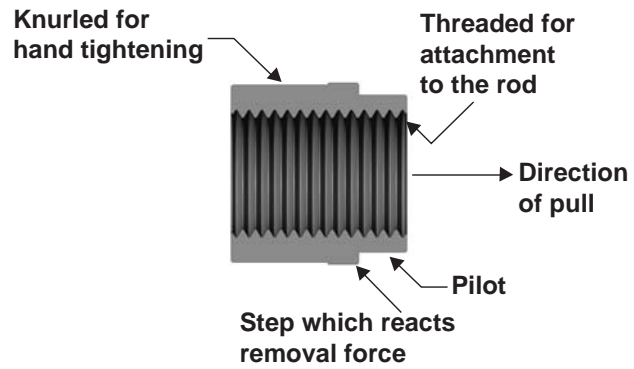

**Figure 13.8C**  
**Bushing Removal Collar**

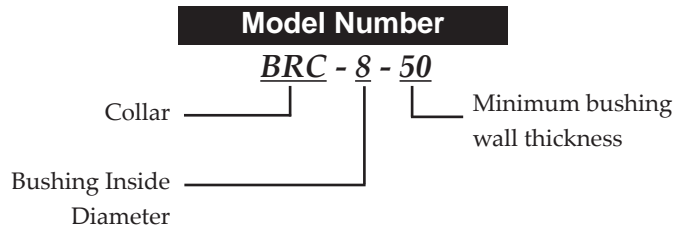

**Figure 13.8D**  
**Bushing Removal Nosecap**

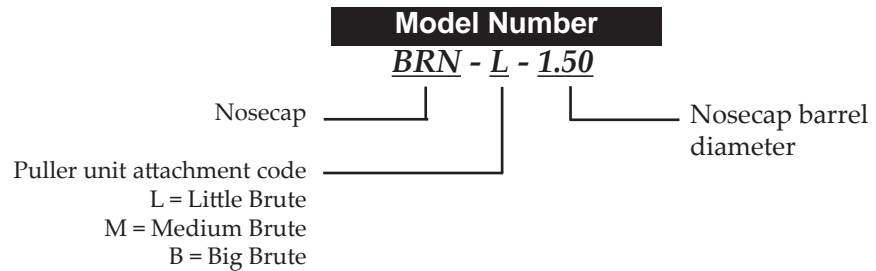

**Table 13.8E**  
**BRT Nosecap Inside Diameter**

Applicable Puller Unit Size	Nosecap Inside Diameter	Nosecap Model Number
Little Brute	.75	BRN-L-.75
Little Brute	1.00	BRN-L-1.00
Little Brute	1.50	BRN-L-1.50
Little Brute	2.00	BRN-L-2.00
Medium Brute	1.00	BRN-M-1.00
Medium Brute	1.50	BRN-M-1.50
Medium Brute	2.00	BRN-M-2.00
Medium Brute	2.50	BRN-M-2.50
Medium Brute	3.00	BRN-M-3.00
Big Brute	1.50	BRN-B-1.50
Big Brute	2.00	BRN-B-2.00
Big Brute	2.50	BRN-B-2.50
Big Brute	3.00	BRN-B-3.00
Big Brute	3.50	BRN-B-3.50
Big Brute	4.00	BRN-B-4.00

**13.8**  
**BUSHING**  
**REMOVAL**  
**TOOL**

# A.0 APPENDIX A

## APPENDIX

Section	Page
A.1 Glossary of Terms.....	207
A.2 STDN Metric Conversion Table .....	210
A.3 Subject Index.....	212

# A.1 GLOSSARY OF TERMS

- Applied Expansion:** The total expansion of the hole during cold expansion, expressed as a percentage of the starting hole diameter.
- Back Taper:** The portion of the mandrel that allows the mandrel to gradually enter a hole when cold expanding.
- Backside Clearance:** The distance from the back of the hole to the nearest obstruction.
- Base Material:** The material in which the hole is to be cold worked using the Split Sleeve Cold Expansion or the ForceMate Systems.
- CA:** Model number prefix for tooling used in titanium and high strength steel.
- Capital Tooling:** Includes puller units, PowerPaks, and adapters.
- CB:** Model number prefix for tooling used in aluminum or mild steels.
- Cold Expanded Hole Diameter:** The diameter of a hole after cold expansion, defined as the minimum diameter measured along an axial line oriented 90 degrees from the location of the axial ridge left by the split in the sleeve.
- Cold Expansion System (Cx):** A series of patented systems used to extend the fatigue life of metal structures (SsCx, Cx2s, CsCx, FmCx, ScCx, RwcCx, FtCx, GrCx, BICx).
- Cold Expansion to Size (Cx2s):** A process whereby holes are cold expanded and final sized in one operation, without the need for post sizing (final reaming).
- Cold Working (Cold Expansion):** A process whereby fatigue or crack growth life of a hole is improved due to the creation of residual compressive stresses around the hole.
- Controlling Documents:** The engineering specifications used to document the Cx processes.
- Countersink Cold Expansion (CsCx):** Split Sleeve Cold Expansion of an existing countersunk hole in aluminum.
- CR:** Model number prefix for tooling used in rework applications in aluminum.
- Critical Tooling Dimensions:** Any tooling dimension that contributes to the applied expansion of a hole or to a related quality assurance inspection.
- CsCx:** Trademark used to indentify the FTI Split Sleeve Countersink Cold Expansion system.
- Cx:** Trademark used to indentify all the FTI Cold Expansion systems.
- Cx2s:** Trademark used to indentify the FTI Cold Expansion to Size system.
- Durable Tooling:** Includes cutting tools, mandrels, nosecap assemblies, combination gages, and mandrel gages.
- Enhanced Stop Drill Repair:** A system using FTI's StopCrack procedure, which extends the fatigue life of stop drilled holes.
- Existing Hole Diameter (EHD):** The inside diameter of the hole prior to any operation involved in the Cx process.

# A.1

## GLOSSARY OF TERMS

**Expendable Tooling:** Includes all split sleeves and backup blocks.

**Fatigue:** The failure of metal structure due to cyclic tensile stresses which are usually far less than the yield strength of the material and due to stress concentrations such as fastener holes.

**Fatigue Life Enhancement:** A process that improves the fatigue life of metal structures.

**Final Hole Diameter (FHD):** The inside hole diameter of the base material after Cx processing and final sizing operations are complete.

**FmCx:** Trademark used to identify the FTI ForceMate system.

**ForceMate (FmCx):** A system of tooling used to install bushings with high interference while simultaneously cold working the material surrounding the bushed hole.

**ForceTec (FtCx):** A system of tooling used to install a rivetless nut plate while simultaneously cold working the material surrounding the hole.

**Front Taper:** The portion of the mandrel that allows the sleeve to slide on easily.

**Front Side Clearance:** The distance from the front of the hole to the nearest obstruction.

**FtCx:** Trademark used to identify the FTI ForceTec system.

**FTI:** Fatigue Technology (a Registered Trademark).

**GrCx:** Trademark used to identify the FTI GromEx system.

**GromEx (GrCx):** A grommet installation system designed to use low applied expansion to install grommets to protect fastener holes in composites.

**KB:** Model number prefix for tooling used for countersunk applications in aluminum (mandrels and nosecaps only).

**KB2:** Model number prefix for tooling used for Split Sleeve Cold Expansion to Size in aluminum.

**Lateral Clearance:** The distance from the edge of the hole to the nearest obstruction.

**Mandrel Flat:** The length of the major diameter of a mandrel.

**Mandrel Nose:** The section of the mandrel beyond the stackup portion. Consisting of the back taper, major diameter, and front taper.

**Mandrel "B" Diameter:** The minor diameter of a mandrel, also where the sleeve is placed prior to cold expanding a hole.

**Mandrel "D" Diameter:** The major diameter of a mandrel.

**Material Stackup:** The combined thickness of a structure through which a hole is located; also the total length of a hole.

**OAL:** Overall length.

**Overall Length (OAL):** The total length of a tool.

## **A.1**

### **GLOSSARY OF TERMS**

**Pull Force:** The amount of force required for a puller unit to pull a mandrel through a hole.

**ScCx:** Trademark used to identify the StopCrack Split Sleeve Cold Expansion system.

**Short Front Taper:** A shortened nose length on a mandrel for severely restricted back-side clearance problems.

**Split Sleeve Cold Expansion (SsCx):** Deep cold expansion of the metal around a hole using FTI's system of tooling.

**SsCx:** Trademark used to identify the FTI Split Sleeve Cold Expansion system.

**Standard Tool Diameter Number (STDN):** The tool code used to identify a specific size of tooling.

**Starting Hole Diameter (SHD):** The specified hole diameter, in the base material, before using one of the Cx processes.

**STDN:** Standard Tool Diameter Number.

**StopCrack (ScCx):** A system for significantly improving the effectiveness of the stop drill technique used to retard propagation of cracks in structural components.

**A.2  
STDN METRIC  
CONVERSION  
TABLE**

**Table A.2A  
Metric Conversion  
Split Sleeve Cold Expansion in Aluminum and Mild Steel**

Reference Final Fastener (in MM)	Standard Tool Diameter Number	Existing Fastener Diameter (in MM)	Existing Hole Diameter (in MM)
3.5	4-0-N	2.5	2.75
4.0	4-1-N	2.5	3.00
4.5	4-2-N	3.0	3.40
4.5	4-3-N	3.5	3.81
5.0	4-4-N	4.0	4.04
5.0	6-0-N	4.0	4.24
5.5	6-1-N	4.5	4.62
6.0	6-2-N	5.0	5.05
6.5	6-3-N	5.0	5.46
7.0	8-0-N	5.5	5.72
7.0	8-1-N	6.0	6.12
7.5	8-2-N	6.5	6.50
8.0	8-3-N	6.5	6.93
8.5	10-0-N	7.0	7.29
9.0	10-1-N	7.5	7.70
9.0	10-2-N	8.0	8.08
9.5	10-3-N	8.0	8.48
10.0	12-0-N	8.5	8.86
10.5	12-1-N	9.0	9.27
11.0	12-2-N	9.5	9.68
11.0	12-3-N	10.0	10.06
11.5	14-0-N	10.0	10.44
12.0	14-1-N	10.5	10.85
12.5	14-2-N	11.0	11.18
12.5	14-3-N	11.5	11.56
13.0	16-0-N	11.5	11.79
13.5	16-1-N	12.0	12.19
14.0	16-2-N	12.5	12.57
14.5	16-3-N	12.5	12.98
14.5	18-0-N	13.0	13.39
15.0	18-1-N	13.5	13.79
15.5	18-2-N	14.0	14.17
16.0	18-3-N	14.5	14.55
16.5	20-0-N	14.5	14.91
16.5	20-1-N	15.0	15.32
17.0	20-2-N	15.5	15.77
17.5	20-3-N	16.0	16.15
18.0	22-0-N	16.5	16.45
18.5	22-1-N	16.5	16.89
18.5	22-2-N	17.0	17.27
19.0	22-3-N	17.5	17.68
19.5	24-0-N	17.5	17.98
20.0	24-1-N	18.0	18.39
20.5	24-2-N	18.5	18.77
20.5	24-3-N	19.0	19.18
21.0	26-0-N	19.5	19.61
21.5	26-1-N	20.0	20.02
22.0	26-2-N	20.0	20.35
22.5	26-3-N	20.5	20.73
22.5	28-0-N	21.0	21.11
23.0	28-1-N	21.5	21.51
23.5	28-2-N	22.0	22.07
24.0	28-3-N	22.0	22.45
24.5	30-0-N	22.5	22.63
25.0	30-1-N	23.0	22.04
25.5	30-2-N	23.0	23.44
26.0	30-3-N	23.5	23.85

For complete information on Cx2s engineering requirements, refer to Process Specification FTI-8201.

**\*Note:** When there are two tooling numbers for the same size reference fastener, the tooling number with the smallest existing fastener diameter should be used if a high fastener interference is desired.

**Table A.2B**  
**Metric Conversion**  
**Split Sleeve Cold Expansion in Titanium and**  
**High Strength Steel**

**A.2**  
**STDN METRIC**  
**CONVERSION**  
**TABLE**

Reference Final Fastener (in MM)	Standard Tool Diameter Number	Existing Fastener Diameter (in MM)*	Existing Hole Diameter (in MM)
3.5	20	2.5	2.540
4.0	21	2.5	2.921
4.5	22	3.0	3.302
5.0	23	3.5	3.708
5.0	30	4.0	4.064
5.5	31	4.0	4.445
6.0	32	4.5	4.826
6.5	33	5.0	5.232
7.0	40	5.5	5.613
7.5	41	5.5	5.994
8.0	42	6.0	6.375
8.0	43	6.5	6.782
8.5	50	7.0	7.036
9.0	51	7.0	7.417
9.5	52	7.5	7.823
10.0	53	8.0	8.204
10.5	60	8.5	8.585
11.0	61	8.5	8.966
11.0	62	9.0	9.373
11.5	63	9.5	9.754
12.0	70	10.0	10.135
12.5	71	10.5	10.516
12.5	72	10.5	10.922
13.0	73	11.0	11.303
13.5	80	11.5	11.684
14.0	81	12.0	12.090
14.0	82	12.0	12.471
14.5	83	12.5	12.852
15.0	90	13.0	12.233
15.5	91	13.5	13.640
16.0	92	14.0	14.021
16.0	93	14.0	14.402
16.5	100	14.5	14.783
17.0	101	15.0	15.189
17.5	102	15.5	15.570
17.5	103	15.5	15.951
18.0	110	16.0	16.332
18.5	111	16.5	16.739

**\*Note:** When there are two tooling numbers for the same size reference fastener, the tooling number with the smallest existing fastener diameter should be used if a high fastener interference is desired.

For complete information on Cx2s engineering requirements, refer to Process Specification FTI-8201.

# A.3 SUBJECT INDEX

## A

<b>About Fatigue Technology .....</b>	<b>2</b>
<b>Accessories .....</b>	<b>194</b>
13.1 Adapter Kits.....	195
13.2 Support Fixtures.....	197
13.3 Stroke Limiter .....	197
13.4 Seal Kits and Rework Kits.....	198
13.5 Replacement Hoses and Extension Hoses .....	198
13.6 HOA Hose Reversal Kit.....	199
13.7 Remote Trigger .....	199
13.8 Bushing Removal Tool.....	200
 <b>Adapters</b>	
2.2.8 Little Brute Offset Adapters (LBOA).....	23
2.2.9 Hydraulic Offset Adapters (HOA) .....	24
2.2.10 Medium Brute Offset Adapter (MBOA) .....	25
2.2.11 Medium Brute Hydraulic Offsets (MBHO).....	26
2.2.12 Big Brute Hydraulic Offsets (BBHO).....	27
2.2.13 Right Angle Adapter.....	28

## B

<b>Backup Blocks</b>	
2.4.2 Backup Blocks.....	117

## C

<b>CA Tooling, Titanium, High Strength Steel .....</b>	<b>143</b>
5.1 Process Description.....	144
5.2 Process Overview .....	145
5.3 STDN Selection Table for New Holes.....	146
5.4 STDN Selection Table for Rework of Existing Holes .....	148
5.5 Standard Tooling .....	150
 <b>Capital Tooling .....</b>	<b>12</b>
 <b>CB Tooling, Aluminum, Mild Steel .....</b>	<b>121</b>
3.1 Process Description.....	122
3.2 Process Overview .....	123
3.3 STDN Selection Table for New Holes.....	124
3.4 STDN Selection Table for Rework of Existing Holes .....	126
3.5 Standard Tooling .....	128
3.6 Countersink Tooling .....	132
 <b>Cold Expansion System Capabilities .....</b>	<b>6</b>
 <b>CR Tooling, rework.....</b>	<b>155</b>
6.1 Process Description.....	156
6.2 Process Overview .....	157
6.3 STDN Selection Table .....	158
6.4 Standard Tooling .....	159
6.5 Countersink Tooling .....	160

# A.3 SUBJECT INDEX

<b>CsCx Tooling, Countersink</b> .....	164
8.1 Process Description.....	165
8.2 Process Overview.....	166
8.3 STDN Selection Tables.....	167
8.4 Standard Tooling.....	170
<b>CW Tooling, Low Interference Cx</b> .....	134
4.1 Process Description.....	135
4.2 Tool Diameter Selection.....	136
4.3 STDN Tool Diameter Selection.....	137
4.4 Ordering Examples.....	140
4.5 Mandrel Part Number Cross Reference.....	141
4.6 Standard Nosecap Part Number Cross Reference.....	142
<b>Cx2s Tooling, Cold Expansion to Size</b> .....	161
7.1 Process Definition.....	162
7.2 Process Overview.....	163

## D

<b>Detailed Tooling</b> .....	9
2.1 Introduction.....	11
<b>Drills</b>	
2.3.1 Starting Drills.....	34
2.3.2 Right Angle Starting Drills.....	37
2.3.3 Core Drills.....	40
2.3.4 Right Angle Core Drills.....	43
<b>Durable Tooling</b> .....	33

## E

<b>Expendable Tooling</b> .....	112
---------------------------------	-----

## F

<b>ForceMate</b> .....	174
9.1 Process Description.....	175
9.2 System Overview.....	176
9.3 Process Overview.....	177
<b>ForceTec</b> .....	179
10.1 Process Description.....	180
10.2 Process Overview.....	181

## G

<b>Gages</b>	
2.3.9 Combination Gages.....	56
2.3.10 Mandrel Gages.....	59
2.3.11 Final Hole Gages.....	62
2.3.12 Stamp Gages.....	63
<b>GromEx</b> .....	182

# A.3 SUBJECT INDEX

## M

### Mandrels

2.3.13 Mandrels.....	65
2.3.14 Little Brute Mandrels.....	66
2.3.15 Medium Brute Mandrels.....	68
2.3.16 Big Brute Mandrels.....	69
2.3.17 Offset Mandrels.....	70
2.3.18 Little Brute Offset Adapter Mandrels.....	71
2.3.19 Medium Brute Offset Adapter Mandrels.....	72
2.3.20 Midget Puller Mandrels.....	73
2.3.21 Hydraulic Offset Adapter Mandrels.....	74
2.3.22 Right Angle Puller Mandrel.....	75
2.3.23 Modular Extension Nosecap Assembly.....	76

Materials Testing Facility.....	7
---------------------------------	---

## N

### Nosecaps

2.3.23 Modular Extension Nosecap Assembly.....	76
2.3.24 Modular Extension Nosecap (MEN).....	77
2.3.25 MEN for Little Brute Offset Adapter.....	81
2.3.26 MEN for Medium Brute Offset Adapter.....	83
2.3.27 MEN for Medium Brute Hydraulic Offset.....	85
2.3.28 Little Brute Nosecap Assemblies.....	87
2.3.29 Medium Brute Extension Nosecaps.....	90
2.3.30 Big Brute Extension Nosecaps.....	93
2.3.31 Little Brute Flush Nosecap Assemblies.....	95
2.3.32 Medium and Big Brute Flush Nosecap Assemblies.....	96
2.3.33 Little Brute Countersink Nosecap Assemblies.....	97
2.3.34 Medium Brute Countersink Nosecap Assemblies.....	98
2.3.35 Countersink Nosecap Assemblies.....	99
2.3.36 Offset Adapter Flush Nosecaps.....	100
2.3.37 Little Brute Offset Adapter Extension Nosecaps.....	102
2.3.38 Medium Brute Offset Adapter Extension Nosecaps.....	105
2.3.39 Medium Brute Hydraulic Offset Extension Nosecaps.....	108
2.3.40 Right Angle Puller Nosecap.....	111

## P

Placing an Order.....	5
-----------------------	---

### PowerPaks

2.2.14 FT-200 PowerPak.....	29
2.2.15 FT-220 Power Pak.....	30
2.2.16 FT-20 PowerPak.....	31
2.2.17 FTP-19 Hand Pump.....	32

### Pullers

2.2.1 Little Brute PullerUnit.....	13
2.2.2 Medium Brute Puller Unit.....	14
2.2.3 Big Brute Puller Unit.....	15
2.2.4 Jumbo Brute Puller Unit.....	16
2.2.5 Super Brute PullerUnit.....	17
2.2.6 Hand Pullers.....	19
2.2.7 Midget Pullers.....	21

# A.3 SUBJECT INDEX

## R

### Reamers

2.3.5	Starting Reamers .....	45
2.3.6	Right Angle Starting Reamers .....	48
2.3.7	Gage Finish Reamers .....	51
2.3.8	Right Angle Gage Finish Reamers .....	54

## S

### Sleeves

2.4.1	Split Sleeves.....	113
-------	--------------------	-----

	<b>System of Tooling, Basic Introduction .....</b>	<b>4</b>
--	--	----------

## T

	<b>Tooling Kits.....</b>	<b>184</b>
--	--------------------------	------------

12.1	StopCrack Kit.....	185
12.2	Service Bulletins .....	186
12.3	Custom Tooling Kits .....	187
12.4	Cx Overhaul and Repair Kits.....	188
12.5	Tooling Cases .....	191
12.6	Mobile Tooling Cabinets .....	192

## U

	<b>Using This Catalog .....</b>	<b>3</b>
--	---------------------------------	----------