

Edge trimmer TruTool TKA 700





Technical data							
Bevel angles		30°		45°		60°	
Max. bevel length (ls)		ls		ls		ls	
Max. bevel height (hs)			hs		hs		hs
Steel 400 N/mm ²	mm	7	6.1	7	4.9	7	3.5
Steel 600 N/mm²	mm	3.7	3.1	3.7	2.5	3.7	1.8
Steel 800 N/mm²	mm	2.3	1.8	2.3	1.6	2.3	1.1
Aluminium 250 N/mm ²	mm	10	6.5	10	6.4	10	5
Min. sheet thickness	mm	1.5 + hs					
Smallest inner radius	mm	18					
Smallest hole diameter Ø	mm	35					
Working speed (max.)	m/min	4					
Rated input power	W	1700					
Weight	kg	3.9					
Length / height	mm	397/149					

Power tools

Scope of delivery (for version with 45° integraded blade wheel)

3 cutters CR (integrated), cutter mount 45° with integrated blade wheel, head key wrench, TORX - srewdriver, socket wrench, single head wrench, protective eyewear, box for small parts, TRUMPF Box M3


Product features

- Multi-edge cutter mount available for 0° and 15°-60° in increments of 5°, as well as for R2-R3-R4 radii
- Multi-edge cutters, can be turned 3 times
- Bevel lengths of up to 5 mm in one operation; bevel lengths of 7 mm require a second operation
- Reduced vibrations due to buffer elements in the gearbox, combined with a perfectly positioned handle
- Extremely compact 1700 watt motor, high power density

Edge trimmer TruTool TKA 1500







Scope of delivery (for version with 45° integraded blade wheel)

4 cutters (integrated), cutter mount 45° with integrated blade wheel, hexagon wrench key set, guide vence, grease G3, protective eyewear, box for small parts, insertion aid, carrying case

Product features

- Multi-edge cutter mount available for 30°, 37.5°, 45°, 60° and for R2-R3-R4 radii
- Multi-edge cutters, can be turned 4 times. Multi-edge cutter radius, can be turned 3 times
- Bevel lengths of up to 11 mm in one operation; bevel lengths of 15 mm require a second operation
- Smooth-running motor with high power. For comfortable working combined with high quality work
- Close to the processing surface: with the ergonomic guide and motor handle guidance is unrivalled well
- **NEW:** guide fence for processing long, straight sheets. Simultaneously functions as chip protection.

Simply get started

For our top-of-the-line edge trimmer TruTool TKA 1500, we now offer a guide fence for processing long, straight sheets. This makes the run-in to the sheet metal extraordinarily easy.

A positive side effect: the guide fence also serves as a practical

protection against chips.

No sparks

High working speed

■ No sheet thickness limit

■ Low feed force required

Advantages: edge trimmers

quality and uniform flange height

■ No post-processing, dimensionally accurate bevel


■ Burr- and oxide-free cutting area, with no emissions.

Perfect preparation for subsequent coating

Quick and tool-free setting of the chamfer length

Power tools







Video edge trimmers The machines in daily use



We don't kick up dust



Our edge trimmers are extremely versatile. As with our bevellers, you can work without protective equipment, as flying sparks, smoke and dust are not an issue. Once the machine is set into the sheet metal, the workpiece bears the weight and the machine only has to be guided evenly along the edge by applying light pressure. The ergonomic handles are extremely helpful here.



Technical data								
Bevel angles		30°		37,5°		45°		
Max. bevel length (ls)		ls		ls		ls		
Max. bevel height (hs)			hs		hs		hs	
Steel 400 N/mm ²	mm	7.0	6.1	7.0	5.6	7.0	5.0	
Steel 600 N/mm ²	mm	5.7	4.9	5.7	4.5	5.7	4.0	
Steel 800 N/mm²	mm	4.0	3.5	4.0	3.2	4.0	3.0	
Sheet thickness	mm	1–15						
Smallest inner radius	mm	40						
Working speed (max.)	m/min	1.5						
Rated input power	W	1700						
Weight	kg	5.3						
Length/height	mm	342/240						



Scope of delivery

Cutter standard, roller guide cpl., grip, TORX screwdriver, screwdriver SW 4, hex head wrench SW 5, grease gun G1, TRUMPF Box M3

Product features

- 3 carriers for angles of bevel of 30°, 37.5° and 45°
- Ideal for working in confined spaces
- The round handle ensures smooth machine guidance
- Bevel height and sheet thickness easily adjustable without tools
- Cutting direction can be rotated 90° to the right or left

Beveller TruTool TKF 1500/TKF 1500 with 2 speed







TruTool			1500	TKF 1500 with 2 speed			
Bevel angles Bevel angles with special stripper		20°-45° 20°-55°		20°-45° 20°-55°		20°-45° 20°-55°	
				1st gear		2nd gear	
Max. bevel length (ls) Max. bevel height (hs)		ls	hs	ls	hs	ls	hs
Steel 400 N/mm²	mm	15	10.6	15	10.6	15	10.6
Steel 600 N/mm²	mm	9	6.4	11	7.8	9	6.4
Steel 800 N/mm²	mm	6	4.2	9	6.4	6	4.2
Sheet thickness	mm	4-40		4 - 40		4 - 40	
Sheet thick. with adjustment set	mm	40 - 160		40 - 160		40 - 160	
Smallest inner radius	mm	55		55		55	
Working speed (max.)	m/min	2		1,25		2	
Rated input power	W	2600		2600		2600	
Weight	kg	16.5		19.5		19.5	
Length / height	mm	554	x 360	607 x 361			

Bevel length (ls) for all bevel angles. Bevel height (hs) for 45°

Cutting tool standard, roll holder, grip socket, grip pipe, chip box, hexagonal screw M 10 x 20 and M 10 x 25, key AL 17, hex head wrench 6 mm, punch and nibble oil for steel, tube grease S1, grease gun, setting gauge, carrying case

Product features

Scope of delivery:

- 1 carrier: angle of bevel continuously adjustable from 20°-55°
- The 2600 W motor ensures outstanding durability
- Very low power requirements for feed

- TKF 1500 with 2-speed: for customised processing of different materials
- Bevel height and sheet thickness easily adjustable

Weld seams keep their promise

High-tensile weld seams have an important role to play. So it is important that they are prepared correctly to begin with. The surface of the edge must be oxide-free and geometrically uniform, the flange height and angle of bevel must be consistent throughout, and standard welding technology requirements must be satisfied.



Power tools

10× faster

One operation, no post-processing. The machine often pays for itself after just one large order. The bevellers also save working time because the machines are extremely fast. For example, they are up to 10 times faster than angle grinders.

Advantages: bevellers

- Weld seam preparation in one operation
- No sparks
- No rework
- Extremely fast working speed
- Emission- and oxide-free cutting edges achieve bright metallic edges
- Low power requirements for feed
- Chamfer length remains consistent during processing



Video bevellers
The machines in daily us



Power tools

Slat cleaner TruTool TSC 100





Technical data					
Support slat thickness	mm	2-3.9			
Max. slag thickness	mm	25			
Min. spacing between support slats	mm	33.5			
Working speed up to	m/min	8			
Rated input power	W	1700			
Weight	kg	18			
Length / height	mm	2104/342			





Slat cleaner

Cleaning tool (no. 3 incl. seal), seal PUR 1,5 mm, handle, transport unit, hexagon head screw 4 mm and 6 mm, lubricating grease G1 (grease gun)

Product features

- Thoroughly removes slag, even on slats that are subject to
- The multiple cleaning feature extends the service life of the slats. Saves up to 75% of costs
- Cleaning the slats regularly increases the process reliability time and the quality of the manufactured parts
- Single-person operation
- Cleaning parallel to production on laser cutting machines with pallet changer
- Independent of the manufacturer of the laser cutting machine; can be used on all common slats



Expensive slats? Not ours.

Clean regularly - slats can be used up to 4x longer - save up to 75% of the costs. A perfect solution for rising material costs and existing procurement bottlenecks.

"TruTool TSC 100 has already paid for itself after the first use for our two pallet tables."

Christian, Benjamin and Georg Stiegeler (from left to right) Stiegeler Metallbau GmbH (Germany)



Switching is the best position

We offer maximum working comfort thanks to the vibration-dampening handle. With the large number of holding positions on the machine head and on the handle, you have the option of varying the holding position while working. This provides relief and ensures high efficiency.





Part separator TruTool PS 100





Technical data					
Connecting thread		1/4			
Air consumption at 6 bar	m³/min	0.06 - 0.12			
Max. operating pressure	bar	6			
Scrap skeleton thickness (max.)	mm	12			
Stroke rate (from - to)	1/min	500 - 1500			
Weight (without hose and connector)	kg	1.2			
Length / height	mm	88 x 223			



Video part separato



Scope of delivery:

Compressed air connection ISO (integrated), compressed air connection ARO, hammer insert standard (integrated), allen key DIN 911-5 mm and 6 mm

Product features


- Removal of laser-cut small parts from the scrap skeleton
- Up to 10x faster than manual removal
- Separates nanojoint and microjoint connections up to 12 mm
- Ergonomic and user-friendly: the machine can be guided at the machine head and the handle
- Option of changing holding positions; avoids remaining in
- With the rubberized hammer tip, there is no tilting or damage during removal

The machines in operation

In machine, railroad car, and ship construction, TRUMPF edge trimmers and bevellers are just as established as in steel construction and job shops. The slat cleaner is our specialist for clean slats and can be used on almost all CO_2 and 2D laser cutting machines, regardless of manufacturer. By using the part separator, you can remove small parts from the scrap skeleton.














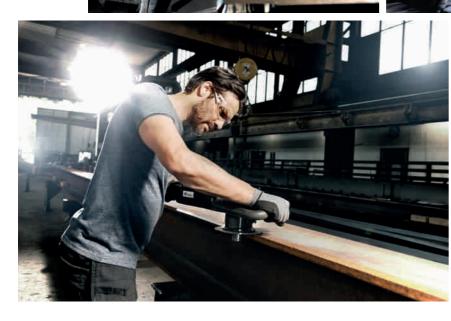







Also of interest:

Thick sheet nibbler for thicknesses of up to 5 mm





Nibbler TruTool N 500

The thick sheet nibbler is unique in its range and offers you the option of cutting in four directions, including backwards. Ideal for work in hard-to-reach areas, for cuts across edges and weld seams. You can even use it to shred scrap skeletons guickly and easily. This makes the disposal of scrap material much easier and ensures optimal use of the disposal containers.

Order numbers

Here you find all order numbers

Edge trimmer	DE	СН	GB	USA		
TruTool TKA 700 with 45° tool	2622918	2622920	2623082	2623084		
TruTool TKA 700 without tool	2622919	2623081	2623083	2623085		
TruTool TKA 1500 with 45° tool	2743892	2743894	2743895	2744091		
TruTool TKA 1500 without tool	2744092	2744096	2744097	2744099		
Beveller	DE	СН	GB	USA		
TruTool TKF 700 bevel angel 30°	2574824	2598685	2598686	2598687		
TruTool TKF 700 bevel angel 37.5°	2598701	2598702	2598703	2598704		
TruTool TKF 700 bevel angel 45°	2598707	2598708	2598709	2598710		
TruTool TKF 1500	2606420	2606421	2606422	2606423		
TruTool TKF 1500 with 2 speed	2606424	2606425	2606426	2606427		
Slat cleaner	DE	СН	GB	USA		
TruTool TSC 100	2574740	2598580	2598601	2598602		
Part separator	Worldwide					
TruTool PS 100	2782209					
Nibbler	DE	СН	GB	USA		
TruTool N 500	2574823	2598625	2598626	2598627		

You can find the symbols on the machine pages



Quick & Easy

Quick and easy tool change



Turnable and regrindable several times

Cutting tools up to 4-fold turnable and regrindable. For long service.



Low-vibration

Minimal vibration values and highest user friendliness



Safety clutch: Safe working by decoupling the power unit in case of unexpected tool stop



Prevents unwanted starting after power interruptions



Overload protection

Protects the motor from over-heating



Softgrip: Ensures optimum and convenient machine control and minimizes vibration



Speed governor Adjustable speed for material-specific working and perfect results



Ergonomic work through smooth starting



Compressed air as drive medium

Our drive: Passion

Power tools

Whether production and manufacturing technology, laser technology or material processing: We develop highly innovative products and services that are industrial quality and proven absolutely reliable. We give it our all to achieve competitive advantages for you: Know-how and experience.





www.youtube.com/ TRUMPFtube





Lasers for manufacturing technology

Whether macro, micro or nano: We have the right lasers and the right technology that is innovative and at the same time cost-efficient for every production application. Beyond the technology, we provide you with system solutions, application knowledge and consulting.



Power supplies for high tech processes

From semiconductor manufacturing to solar cell production: With our high and medium frequency generators, power for induction heating and plasma and laser excitation receives a defined form consisting of frequency and power – that is highly reliable and repeatable.



Machine tools for flexible sheet metal- and tube processing

Laser cutting, punching, bending, laser welding: For all processes in flexible sheet metal production, we offer you precisely tailored machines and automation solutions, including consulting, software and services – so you can reliably produce your products in high quality



Power tools for metal processing

Cutting, fastening, bevelling: Our power tools offer the most innovative technology and the highest quality. Original accessories and a free 5-year warranty provide extra security. Whether on construction sites or in job shopes: High-quality and long-lasting machines are our quality promise.



Industry4.0

The solutions world TruConnect connects man and machine through information. It covers all steps in the manufacturing process – from quote to the shipment of parts.





